

# Note of Delayed Mode Quality Control of Argo float WMO 6901280

For more detailed: Antonella Gallo [agallo@ogs.it](mailto:agallo@ogs.it)

This note includes the results of OWC performed for the WMO 6901280 float. The reference dataset used is composed of the following CTD and Argo historical datasets:

CTD:

- CMEMS: INSITU\_MED\_PHYBGCWAV\_DISCRETE\_MYNRT\_013\_035
- Coriolis: CTD\_for\_DMQC\_2024V01
- Historical CTD profiles provided through personal contact

Argo:


- ARGO\_for\_DMQC\_2022V03

Float 6901280 is the Arvor float, where the pressure sensor is auto corrected and no adjustment is required. The OWC was run to estimate a salinity offset and a salinity drift (Cabanès et al., 2016).

## Configurations


| Parameters               | Value |
|--------------------------|-------|
| CONFIG_MAX_CASTS         | 300   |
| MAP_USE_PV               | 1     |
| MAP_USE_SAF              | 0     |
| MAPSCALE_LONGITUDE_LARGE | 4     |
| MAPSCALE_LONGITUDE_SMALL | 1.33  |
| MAPSCALE_LATITUDE_LARGE  | 4     |
| MAPSCALE_LATITUDE_SMALL  | 1.33  |
| MAPSCALE_PHI_LARGE       | 0.5   |
| MAPSCALE_PHI_SMALL       | 0.1   |
| MAPSCALE_AGE             | 10    |
| MAP_P_EXCLUDE            | 700   |
| MAP_P_DELTA              | 250   |
| Theta_gt                 | 13    |
| Theta_lt                 | 13.05 |
| Split                    | 10    |

## OWC Results

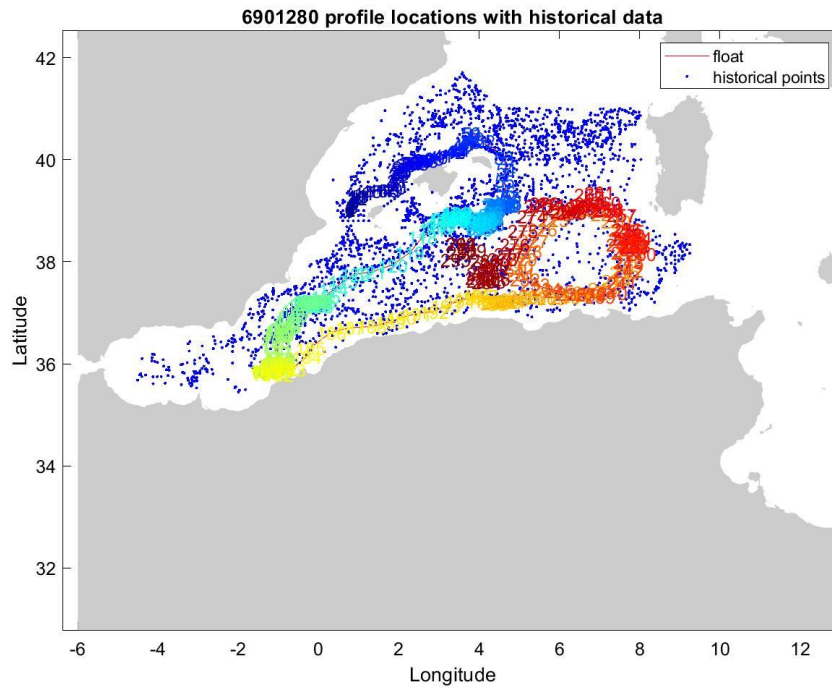


**Figure 1:** Location of the float profiles (red line with colored numbers) and the reference data selected for mapping (blue dots).

3901280 uncalibrated float data (-) and mapped salinity (o) with objective errors

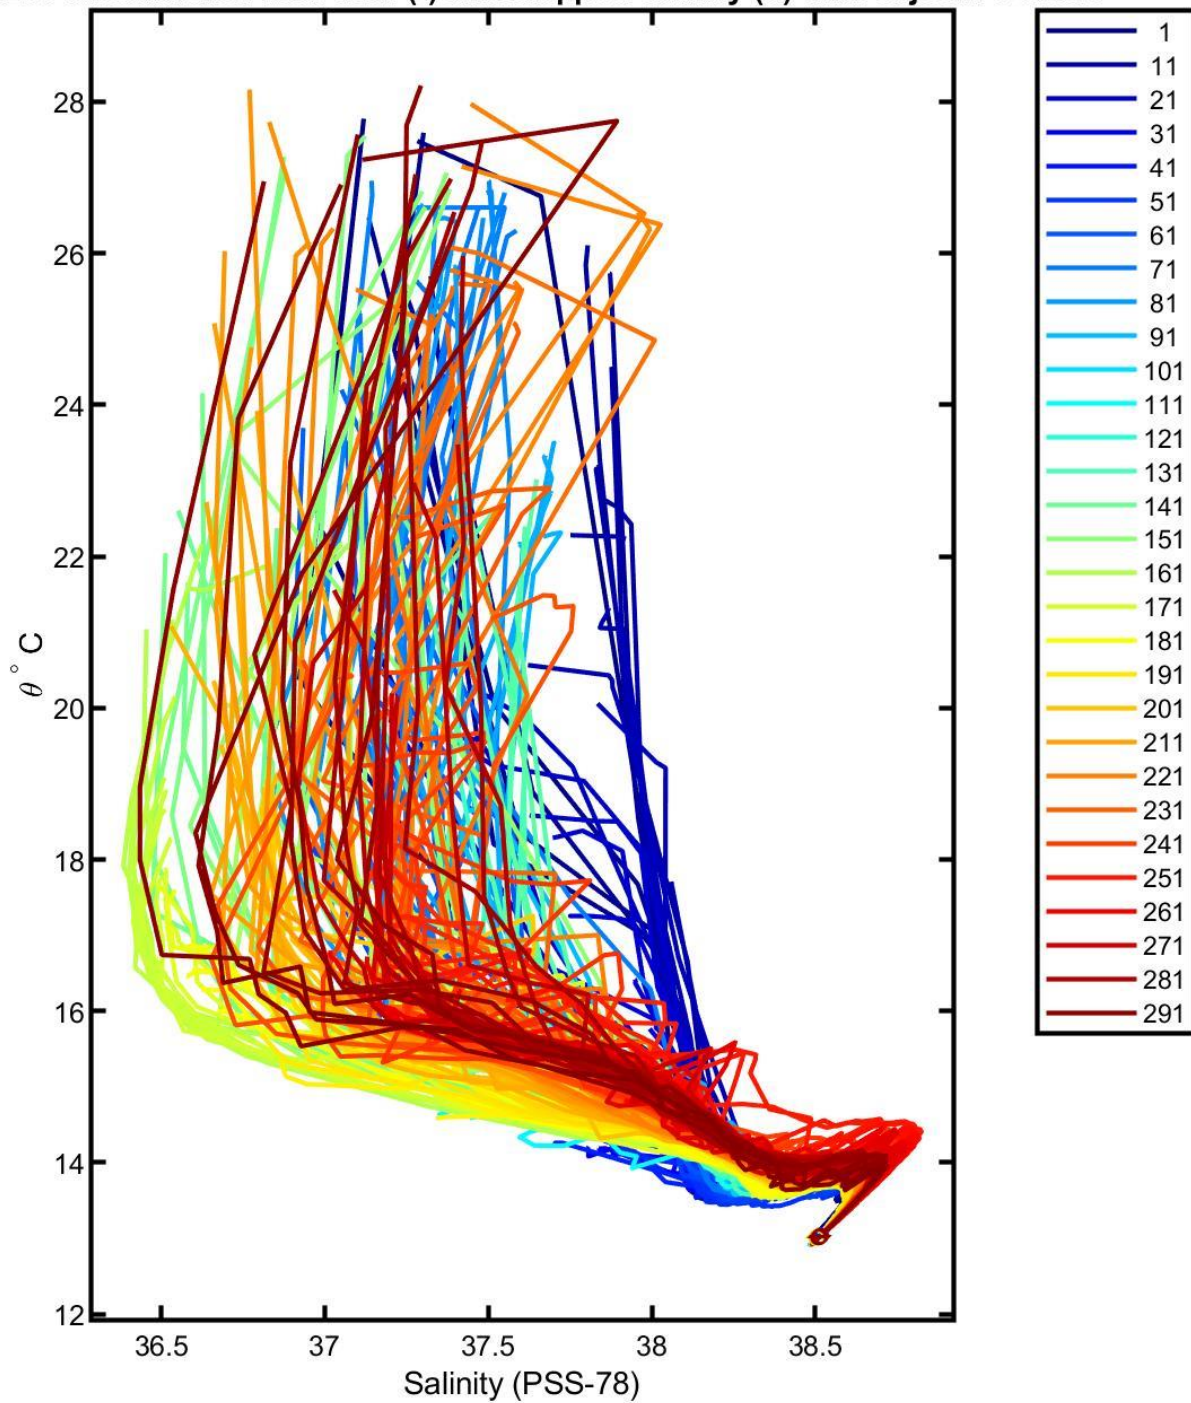

**Figure 2:** Plot the original float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.

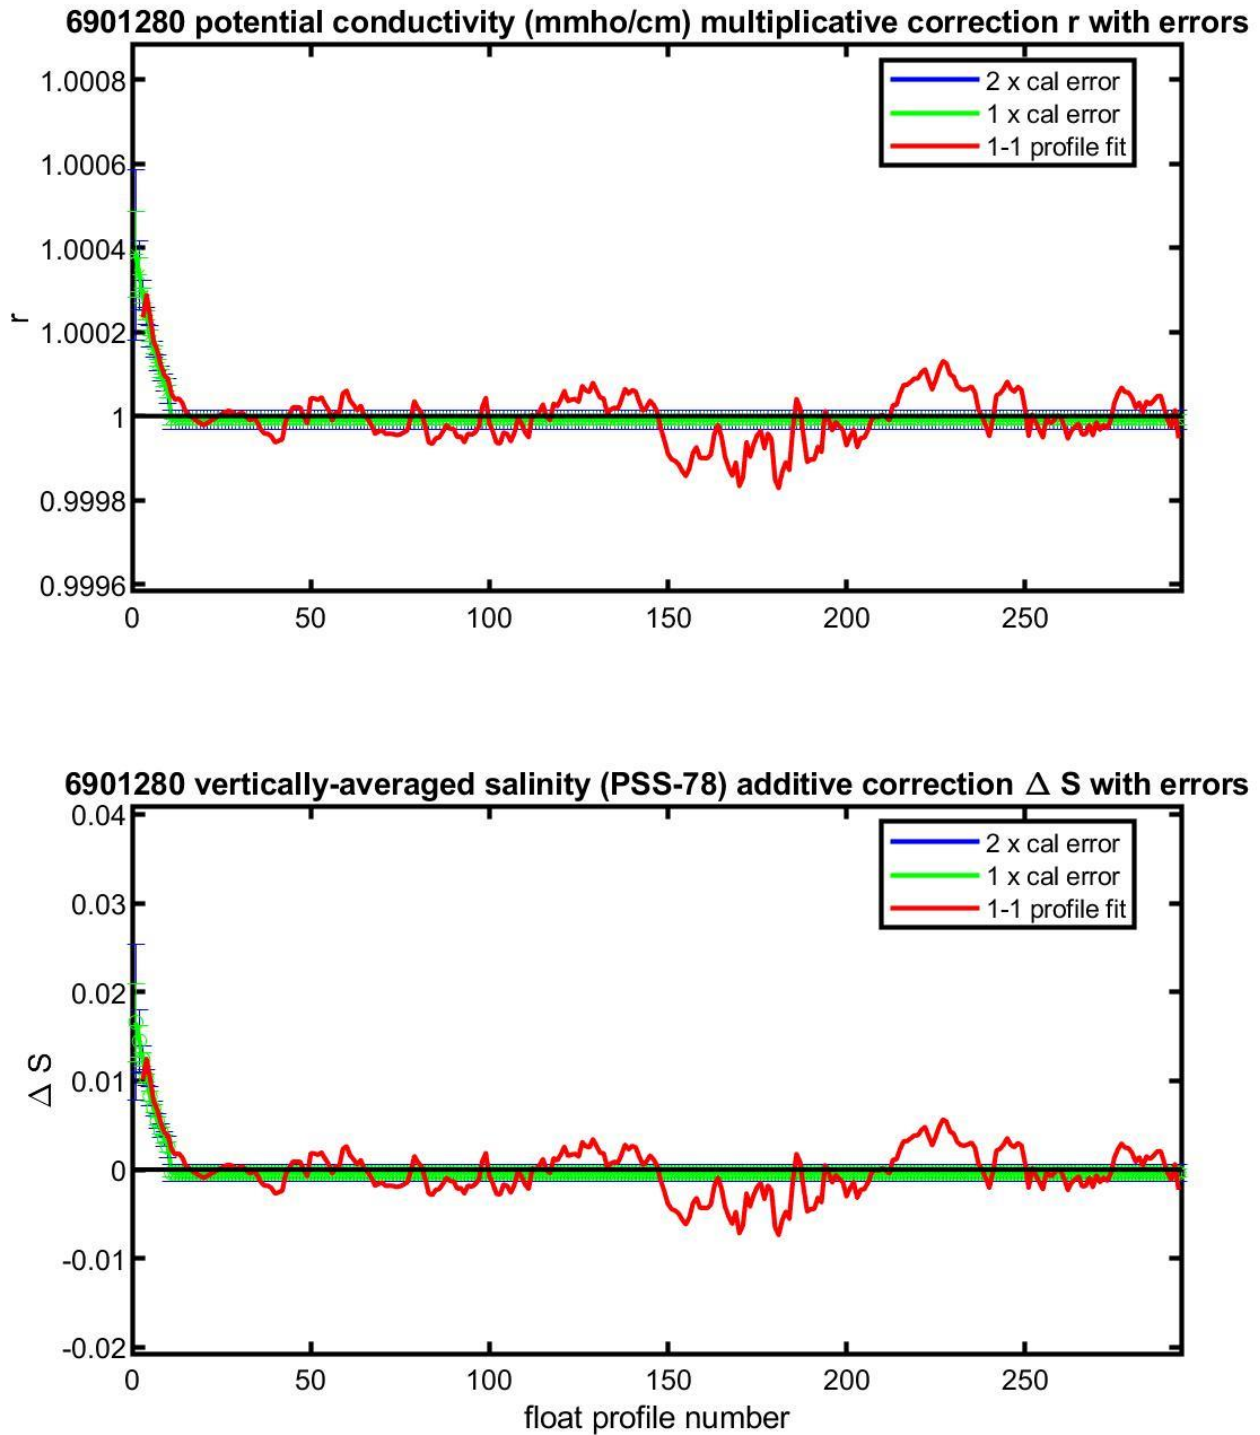

**Figure 3:** Evolution of the suggested adjustment with time. The top panel plots the potential conductivity multiplicative adjustment. The bottom panel plots the equivalent salinity additive adjustment. The red line denotes one-to-one profile fit that uses the vertically weighted mean of each profile. The red line can be used to check for anomalous profiles relative to the optimal fit.

6901280 calibrated float data (-) and mapped salinity (o) with objective errors

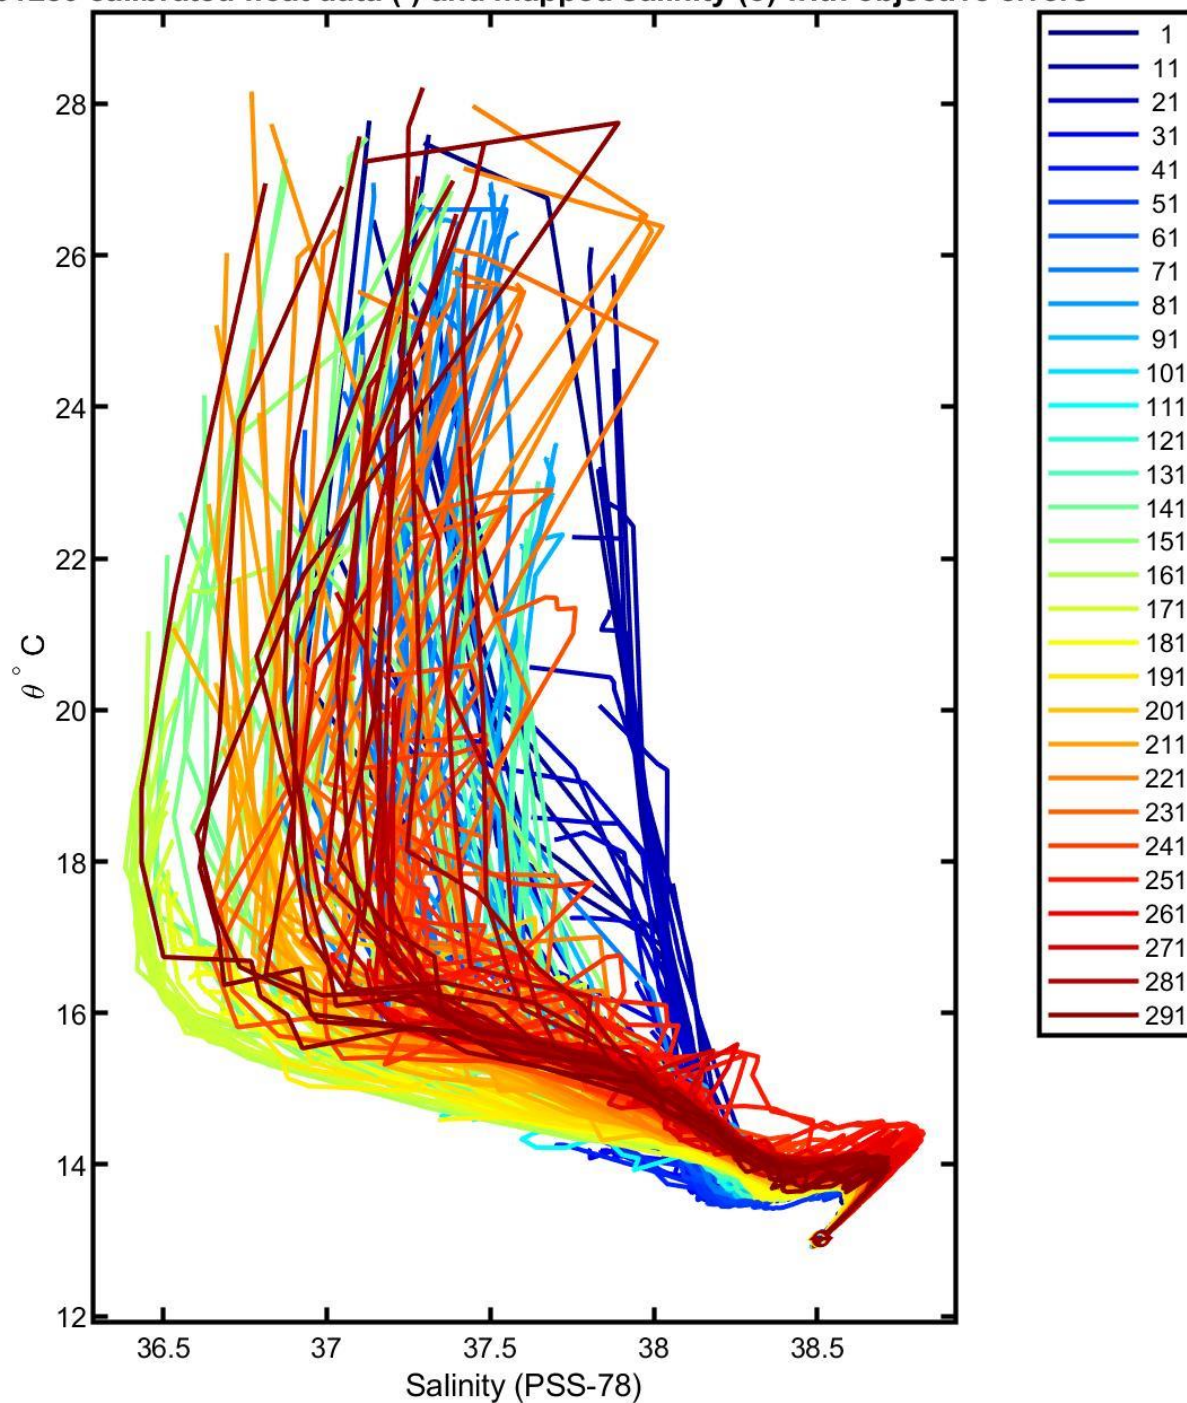


Figure 4: The plot of calibrated float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.





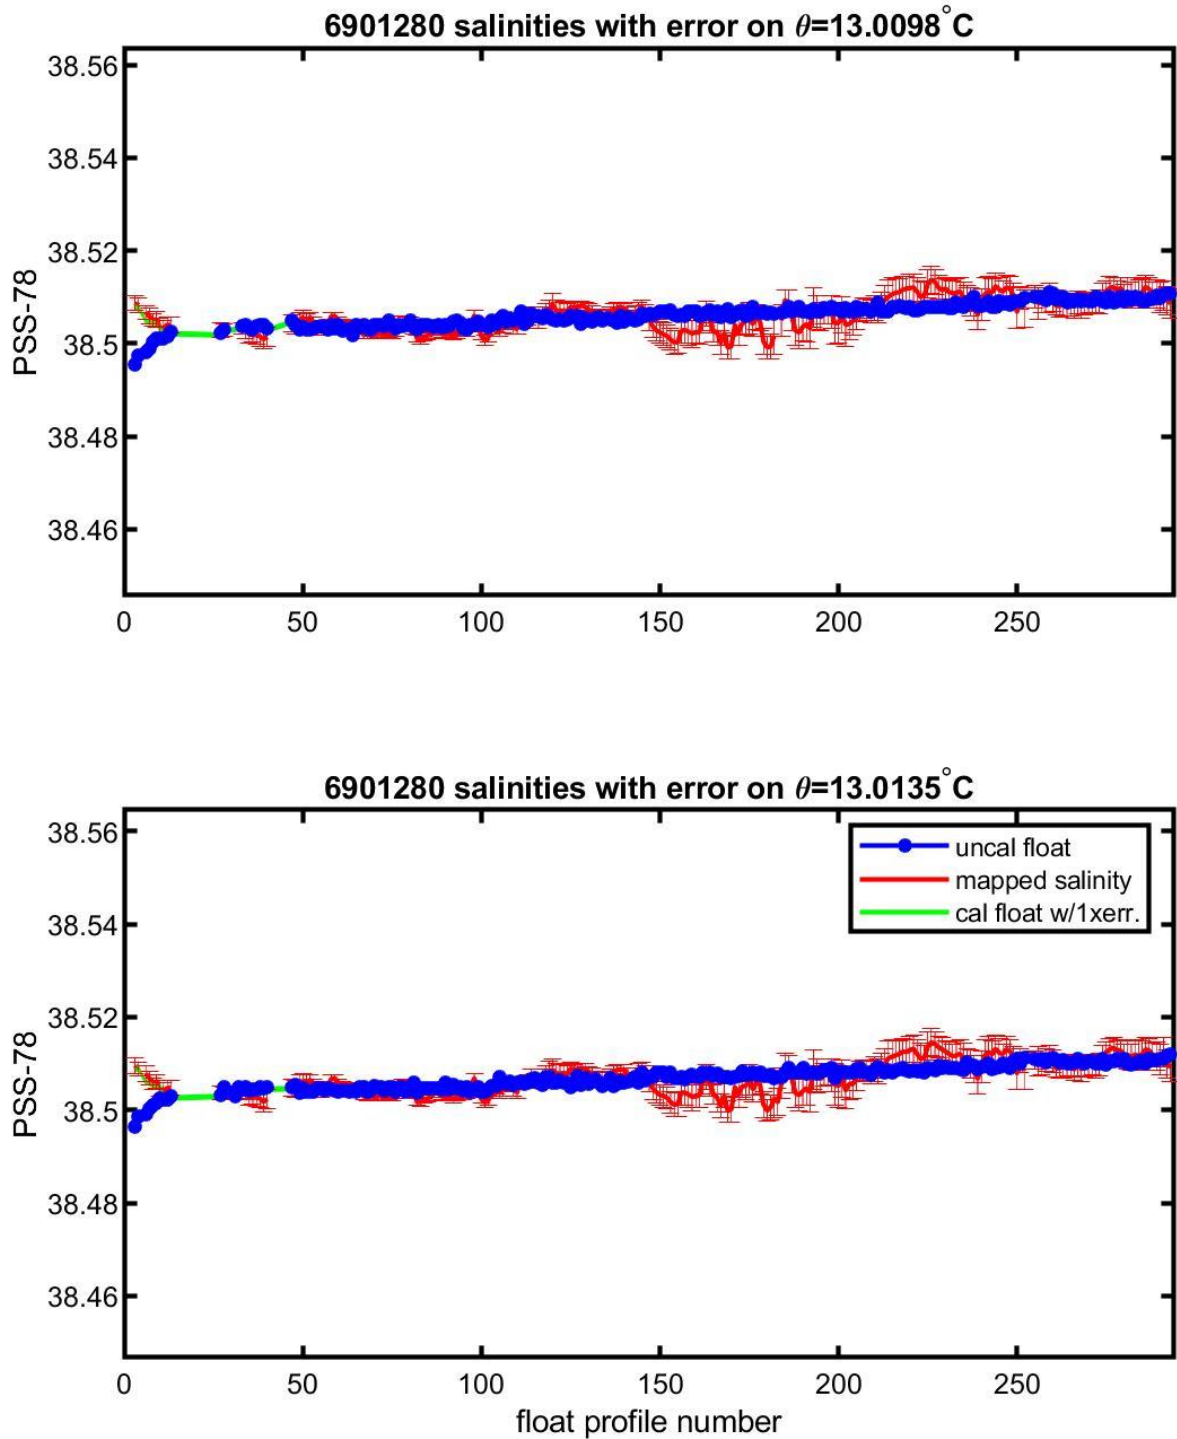


Figure 5: Plots of the evolution of salinity with time along with selected theta levels with minimum salinity variance.

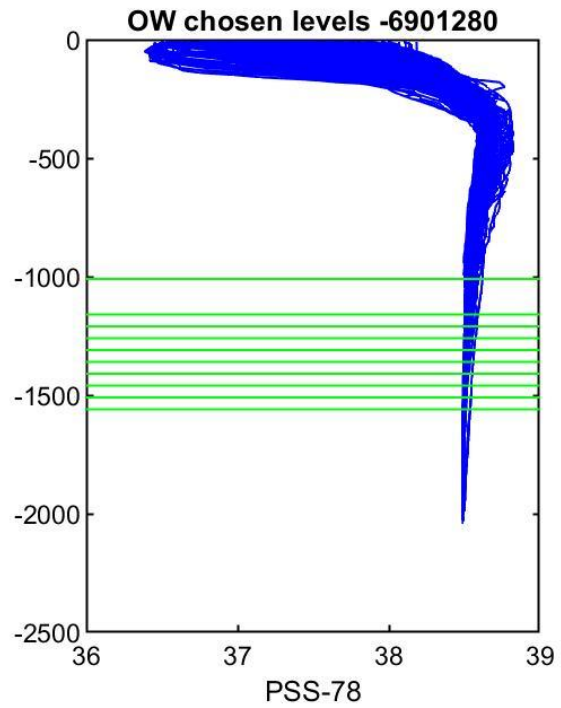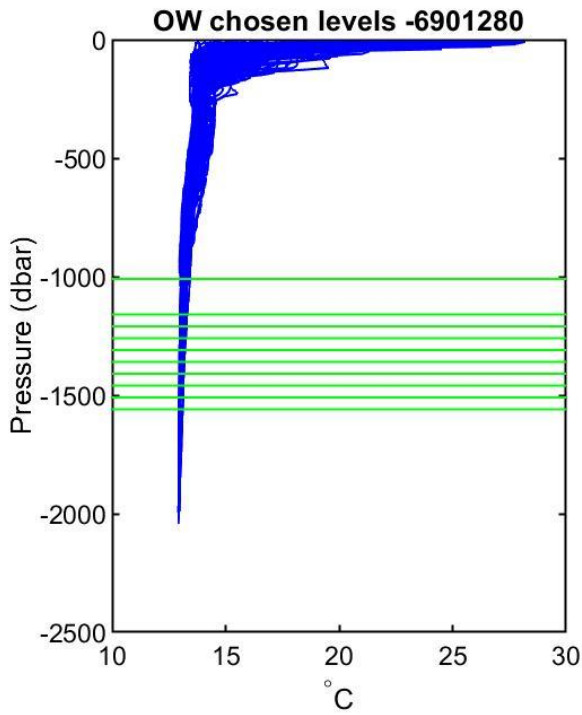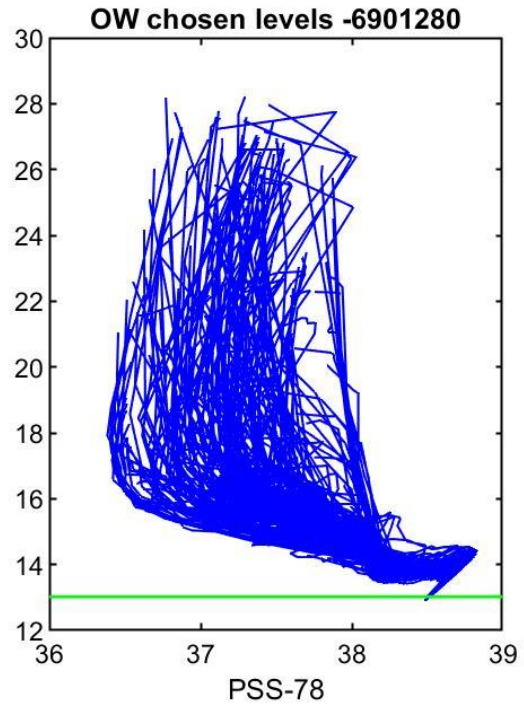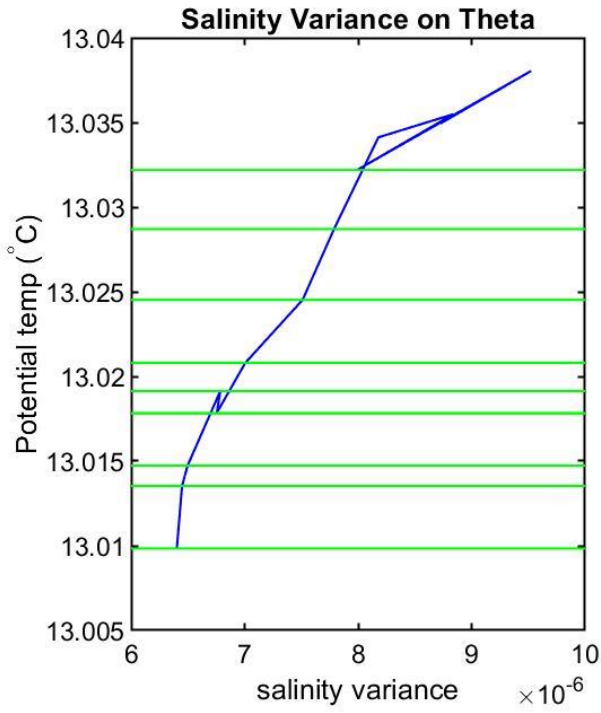

**Figure 6:** Plots include the theta levels chosen for calibration: Top left: Salinity variance at theta levels. Top right: T/S diagram of all profiles of Argo float. Bottom left: potential temperature plotted against pressure. Bottom right: salinity plotted against pressure.

## Summary

Float WMO 6901280 was deployed in the Catalan sub-basin, in the Mediterranean Sea. During its life passed in Alboran and Algerian sub basins. This float was DMQC-ed before, cycles 1-213.

The OWC analysis showed no significant salinity drift. Figure 3 reveals that the least square fit is quite reliable. The correction proposed by OWC suggests a correction below the Argo requested accuracy (0.01). The first 3 cycles show a TBTO. Figure 5 shows that the float salinity is quite constant on selected  $\theta$ -levels. Additional analyses (the visual inspection of the deepest portion of the  $\theta$ -S diagram, the comparison of selected float salinity profiles with the nearby historical CTD profiles) are applied in complement of the OWC method, to provide the best quality control analysis. After several investigation, the last decision is that the salinity data of float WMO 6901280 doesn't need a delayed mode correction, except for the first three cycles which are corrected due to TBTO. QC 1 is applied to all cycles.

PSAL\_ADJUSTED= PSAL +  $\Delta S$  from cycle 1 to 3

PSAL\_ADJUSTED= PSAL from cycle 3 to 293

The quality flags applied are the following:

PSAL\_ADJUSTED\_QC='1' from cycle 1 to 293

The delayed-mode files (Dfiles) have been created accordingly and sent to the Coriolis GDAC.

## References

Cabanes, C., Thierry, V., & Lagadec, C. (2016). Improvement of bias detection in Argo float conductivity sensors and its application in the North Atlantic. *Deep-Sea Research Part I: Oceanographic Research Papers*, 114, 128–136. <https://doi.org/10.1016/j.dsr.2016.05.007>