


# Delayed Mode Quality Control of Argo float WMO 6901512

Antonella Gallo  
ORCID ID: 0000-0002-8836-1550

National Institute of Oceanography and Applied Geophysics - OGS  
Borgo Grotta Gigante 42/C - 34010 - Sgonico ( TS ) – Italy  
09/03/2021

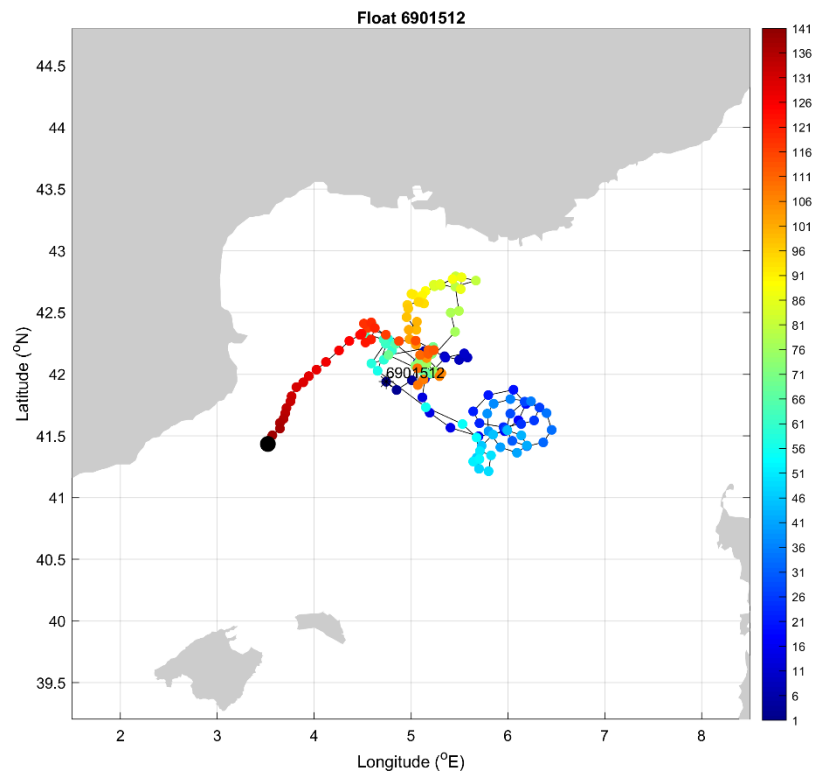

# Contents

- 1 Introduction..... 3**
- 2 Quality Check of Argo Float Data..... 4**
  - 2.1 Verification of Real-time Mode QC flags.....4
  - 2.2 Satellite Altimeter Report .....5
  - 2.3 Time Series of Argo Float Temperature and Salinity .....6
  - 2.4 Comparison Between Argo Float and Climatology ..... 8
- 3 Correction of Salinity Data ..... 14**
  - 3.1 Comparison between Argo Float and CTD Climatology..... 14
    - 3.1.1 Configurations.....14
    - 3.1.2 Results.....15
  - 3.2 Comparison between Argo Float ..... 21
    - 3.2.1 Results.....22
- 4 Comparison between Argo float under study and other Argo float in the same area..... 27**
- 5 Summary..... 28**
- 6 References..... 28**

## 1 Introduction

This report includes the delayed mode analysis performed for float 6901512. It was deployed in Mediterranean Sea (Liguro-Provencal sub basin) in March 2013 and after performed 145 cycles died. Before the analysis, real-time QC flags were visually inspected. The list of flags applied is QC=1 to all cycles. Then, the satellite altimeter comparison plot between the sea surface height and dynamic height anomaly, constructed for this float by Ifremer, was analyzed. Plots of temperature and salinity time series and plots of temperature, salinity and density plotted against the nearby historical CTD profiles was generated. This visual analysis can help in detecting sensor salinity anomalies and spikes.

The reference dataset used is composed of the following CTD and Argo historical datasets:

CTD:

- CMEMS: INSITU\_MED\_TS\_REP\_OBSERVATIONS\_013\_041
- Coriolis: CTD\_for\_DMQC\_2018V01
- Historical CTD profiles provided through personal contact

Argo:

- ARGO\_for\_DMQC\_2018V01

Float 6901512 is the Provor III float where the pressure sensor is auto corrected and no adjustment is required. The OWC was run to estimate a salinity offset and a salinity drift (Cabanès et al., 2016).

## **2 Quality Check of Argo Float Data**


### **2.1 Verification of Real-time Mode QC flags**

The list of flags applied to the float in real-time mode is as follows.

Cycle number:


1-145 PSAL QC=1

## 2.2 Satellite Altimeter Report

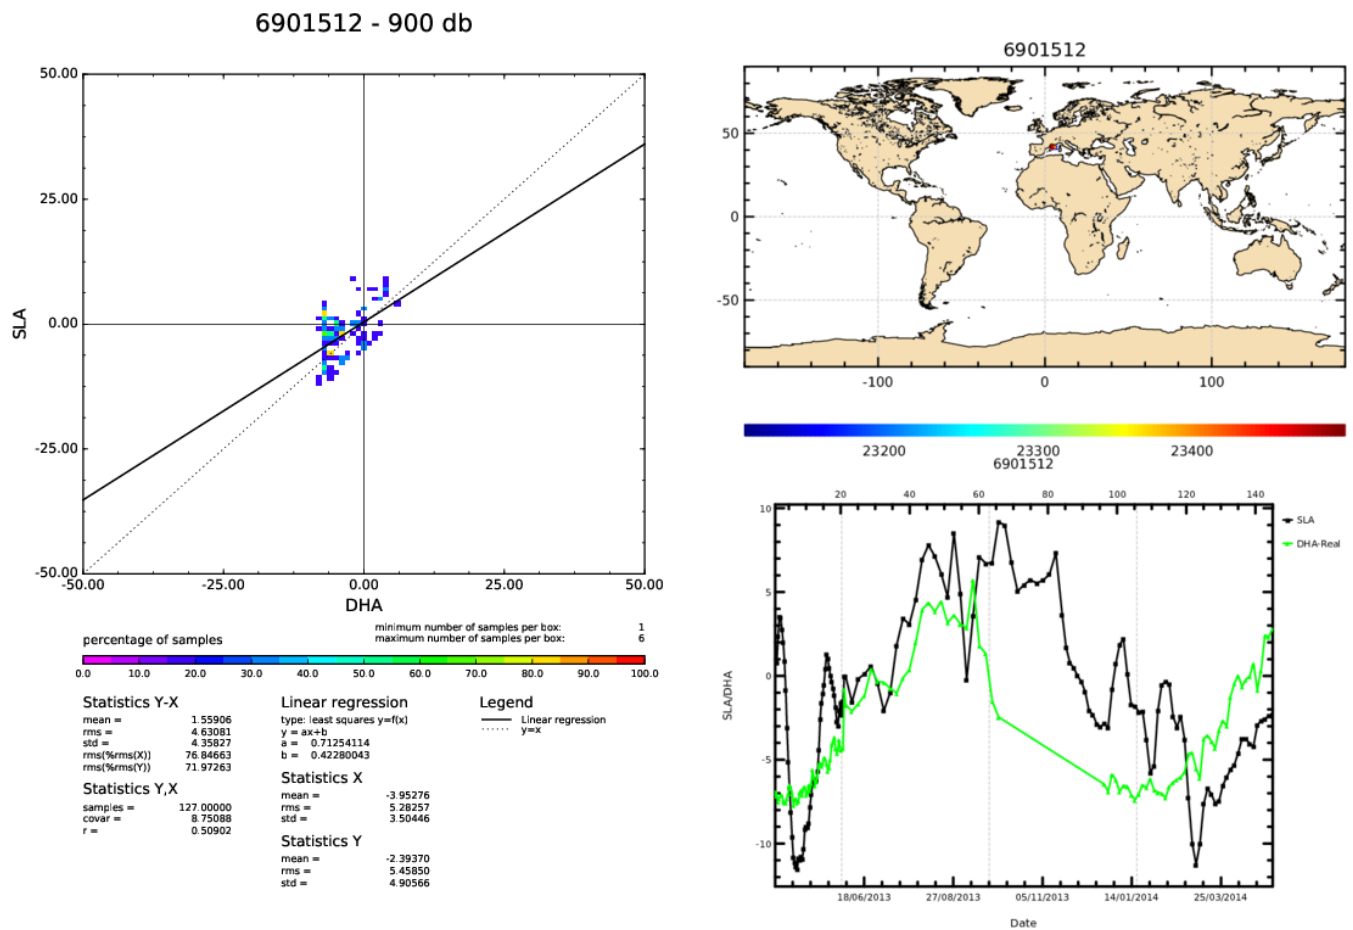


**Figure 1:** Float 6901512. The comparison between the sea surface height (SSH) from the satellite altimetry and dynamic height anomaly (DHA) extracted from the Argo float temperature and salinity. The figure is created by the CLS/Coriolis and distributed by Ifremer (<ftp://ftp.ifremer.fr/ifremer/argo/etc/argo-ast9-item13-AltimeterComparison/figures/>).

### 2.3 Time Series of Argo Float Temperature and Salinity

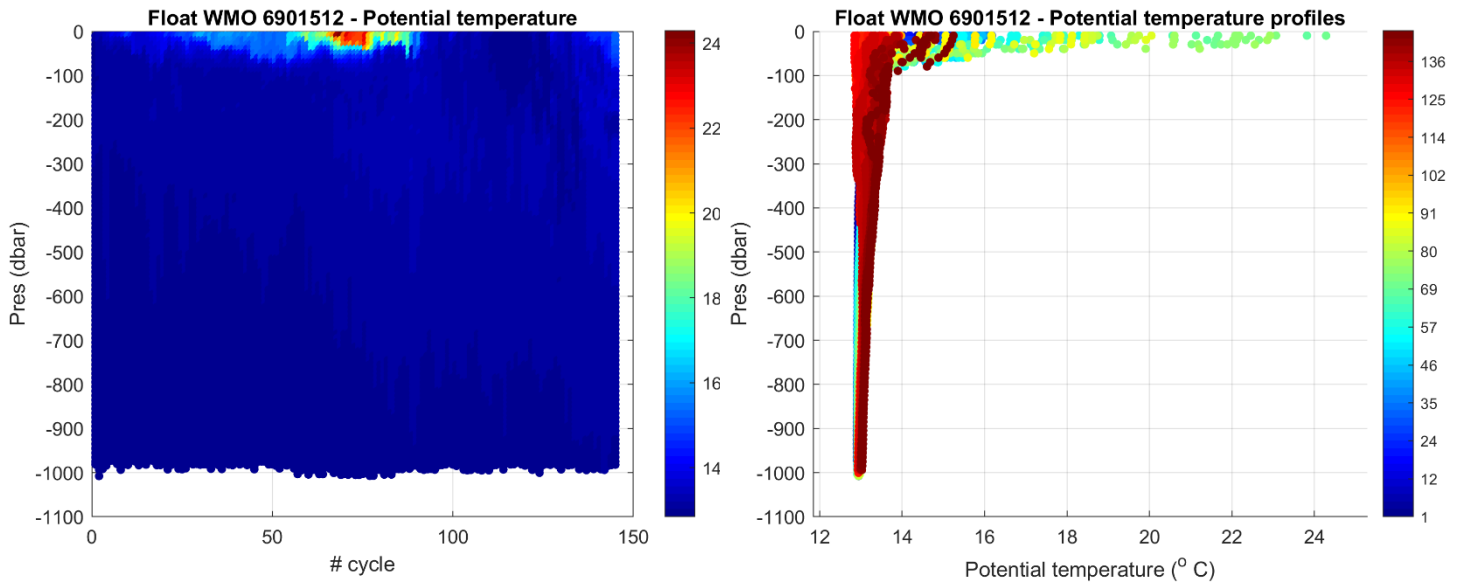

**Figure 2:** Float 6901512. Time series of Argo float potential temperature ( $^{\circ}\text{C}$ ) on the left, and potential temperature profiles color-coded per cycle number on the right.

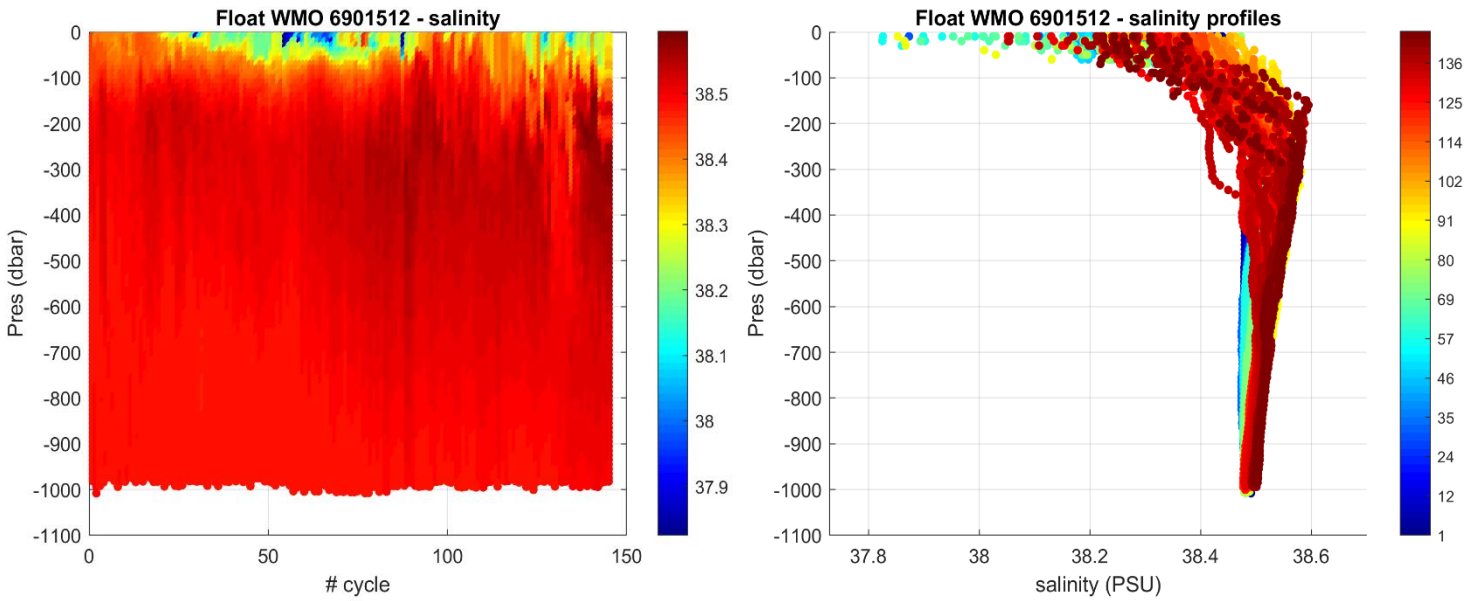

**Figure 3:** Float 6901512. Time series of Argo float potential salinity (PSS-78) on the left, and salinity profiles color-coded per cycle number on the right.

Before running the Owens and Wong method, referred to as OW hereafter, the theta-salinity ( $\theta$ -S) diagram of the float is analyzed (Figure 4) and in particular the area where the  $\theta$ -S relationship is the tightest (Figure 5). No significant salinity drift is observed.

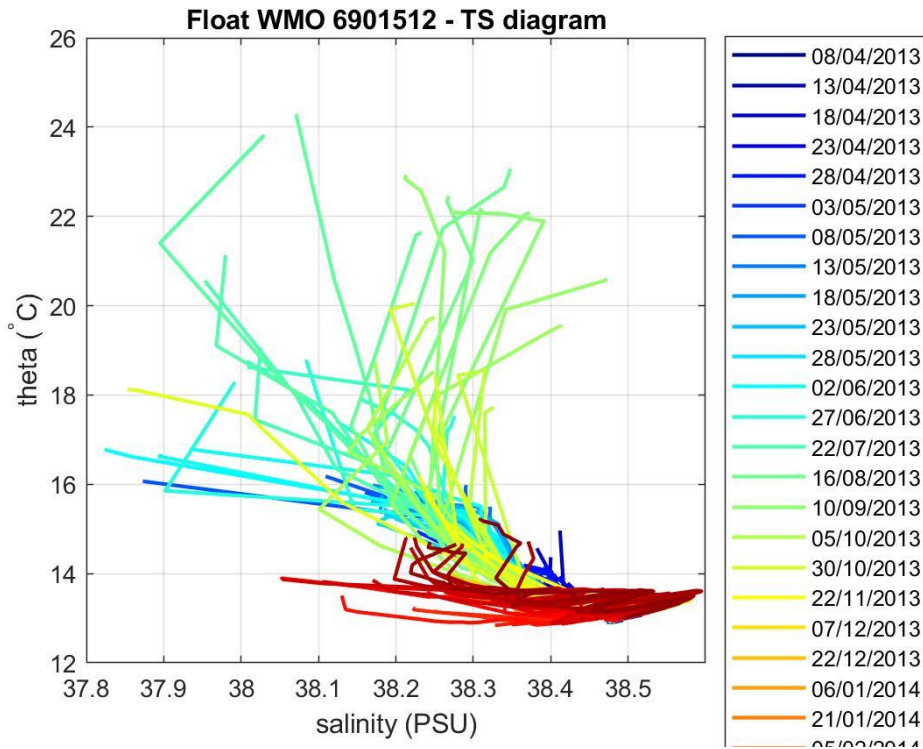


Figure 4: Float 6901512.  $\theta$ -S diagram color-coded per cycle number.


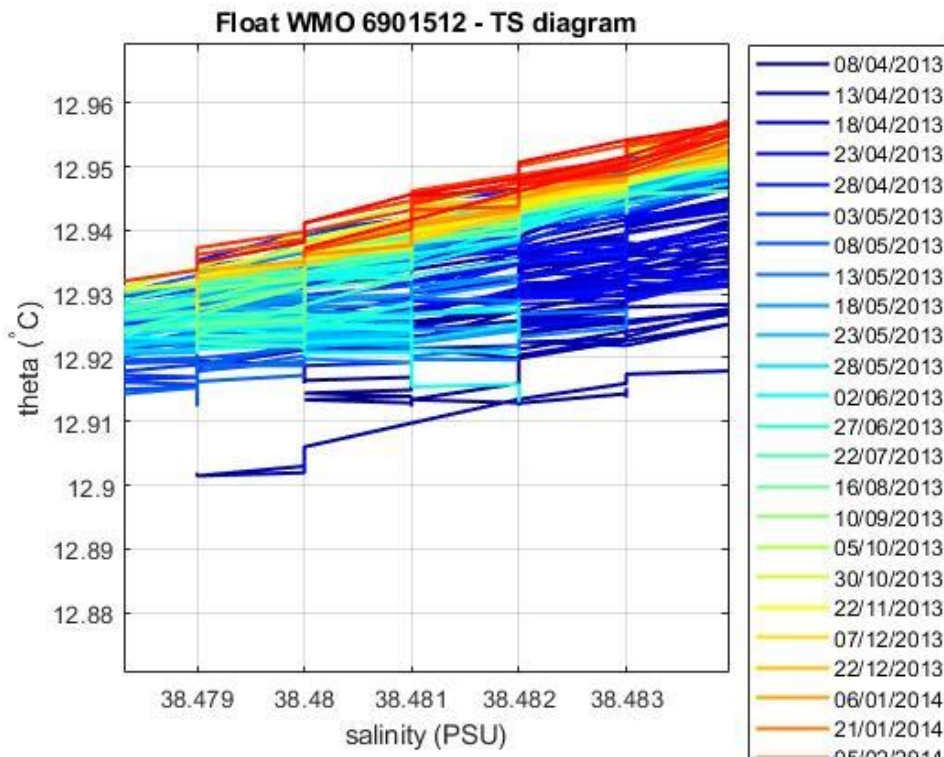



Figure 5: Float 6901512. Area of the  $\theta$ -S diagram (color-coded per cycle number) where the  $\theta$ -S relationship is more uniform.

## 2.4 Comparison Between Argo Float and Climatology

Three salinity float profiles are selected to perform a comparison (in time and space) with the historical data. In figure 6, 7 and 8 each selected profile is compared with all reference data used in this analysis. The salinity float profile is depicted in black while other colors represent the salinity reference profiles. The red color means that the historical data are more recent with respect to the float ones, while magenta states that the float data are more recent than the historical ones (the maximal difference is 6 years). A time difference between 3 and 6, 6 and 9 and larger than 9 years is depicted in green, cyan and blue, respectively.


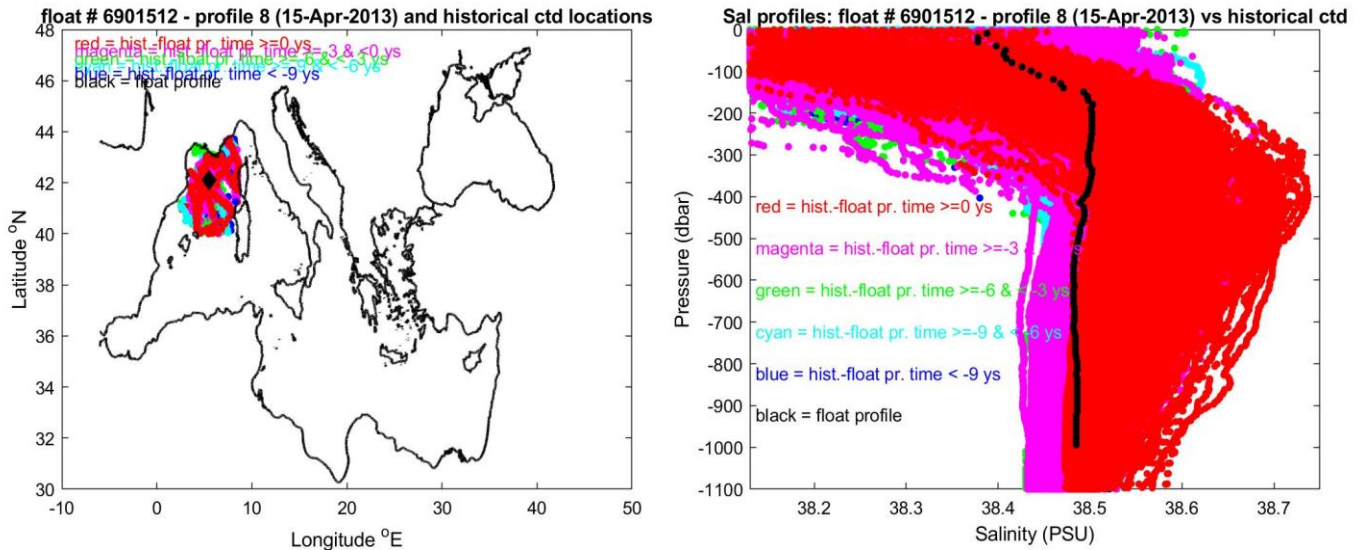


**Figure 6:** Float 6901512. Locations of the salinity float profile number 8 and historical CTD data (right panel) and the respective salinity profiles (left panel).

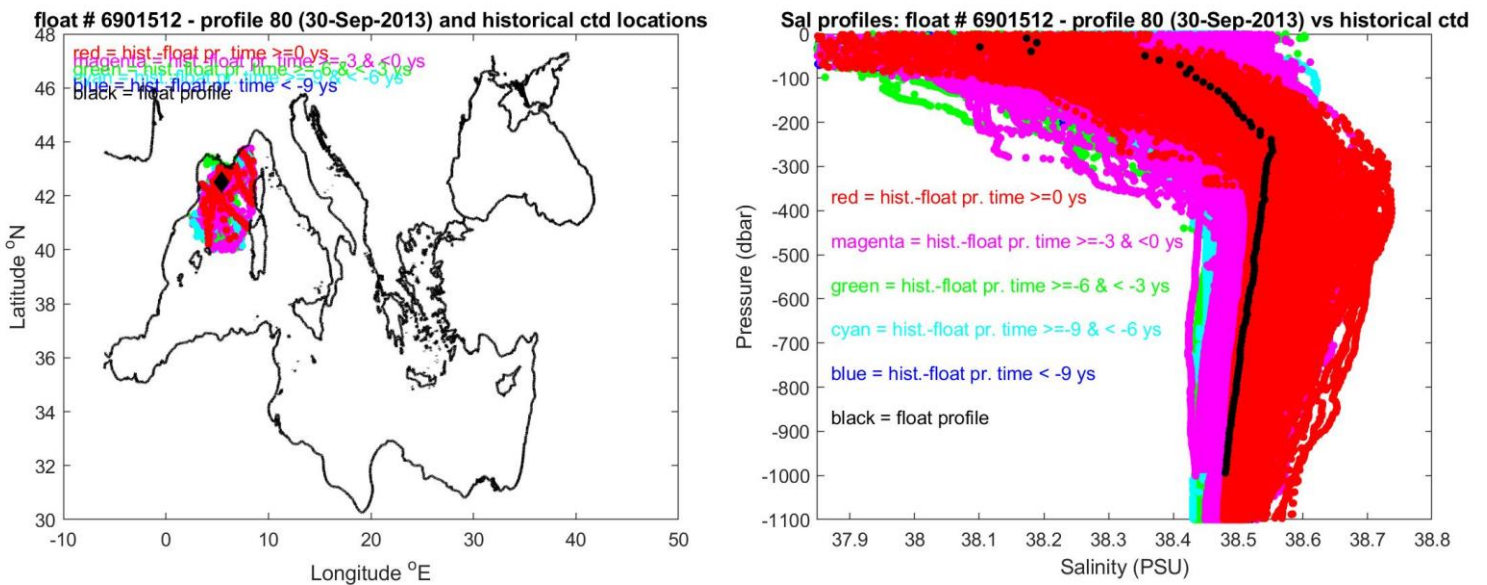

**Figure 7:** Float 6901512. Locations of the salinity float profile number 80 and historical CTD data (right panel) and the respective salinity profiles (left panel).




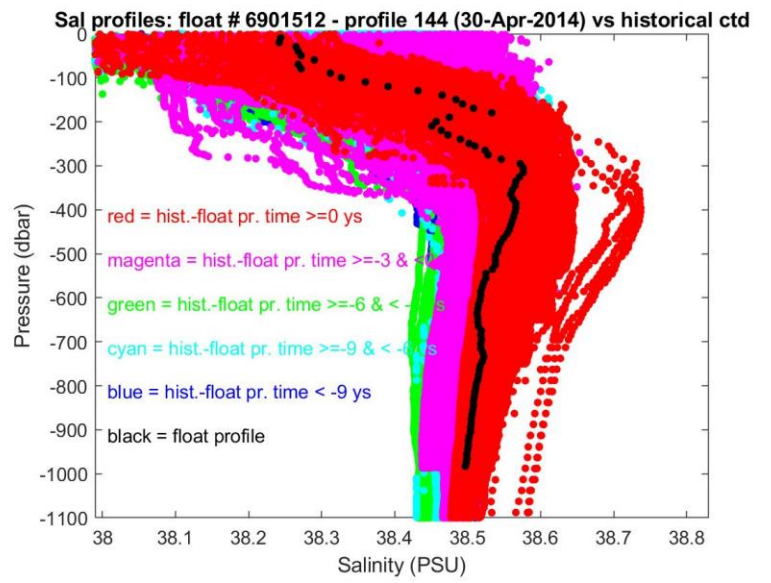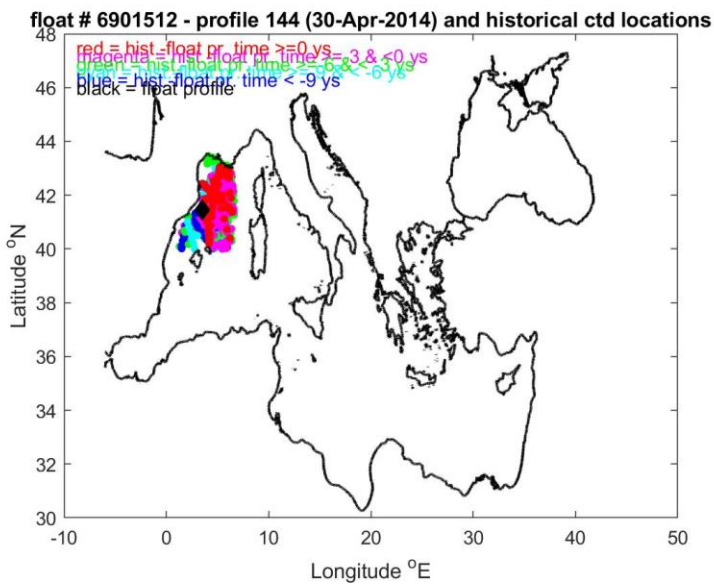


**Figure 8:** Float 690152. Locations of the salinity float profile number 144 and historical CTD data (right panel) and the respective salinity profiles (left panel).

The comparison of these 3 selected salinity float profiles with the closest (in space and time) salinity reference profile is shown in Figures from 9 to 11. The agreement between the selected float salinity profiles and the historical salinity profiles is good in the intermediate layers where the comparison is useful.


Float 6901512 - profile 8 (15-Apr-2013) and nearest (in space) ctd (25-Apr-2008)

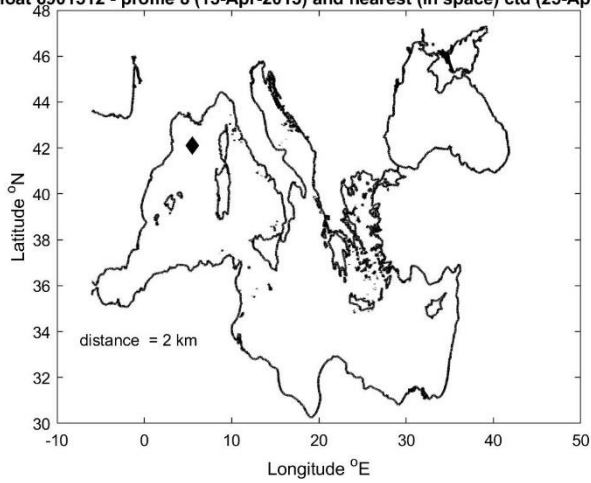


Float 6901512 - profile 8 (15-Apr-2013) vs nearest (in space) ctd (25-Apr-2008)

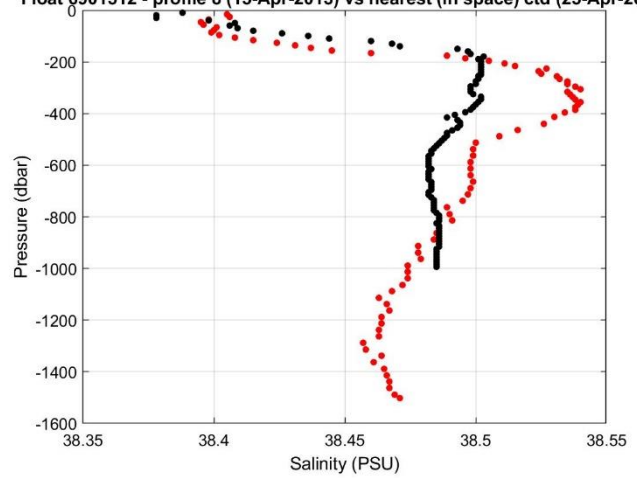


Float 6901512 - profile 8 (15-Apr-2013) and nearest (in time) ctd (16-Apr-2013)

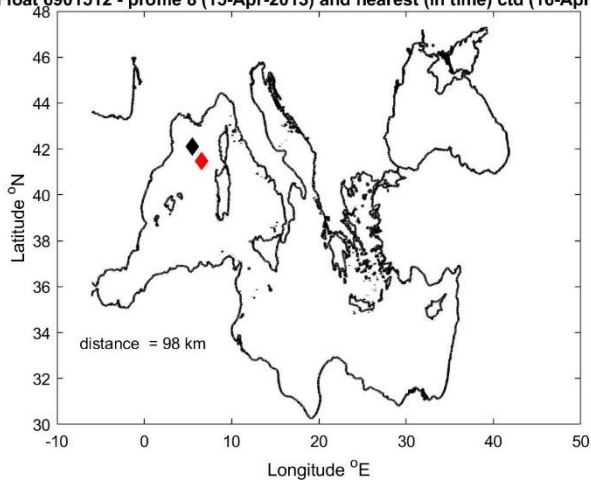


Float 6901512 - profile 8 (15-Apr-2013) vs nearest (in time) ctd (16-Apr-2013)

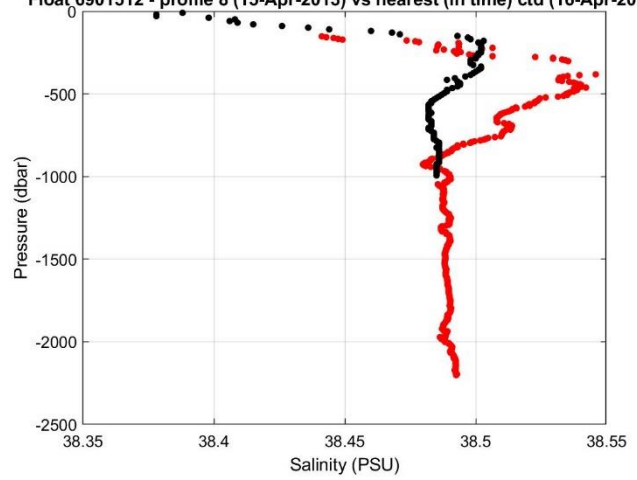


**Figure 9:** Float 6901512. The salinity float profile number 8 (black dots) are compared to the nearest in space (top) and in time (bottom) reference profile (red dots). The locations of the two profiles and their distance is given in the left panel.

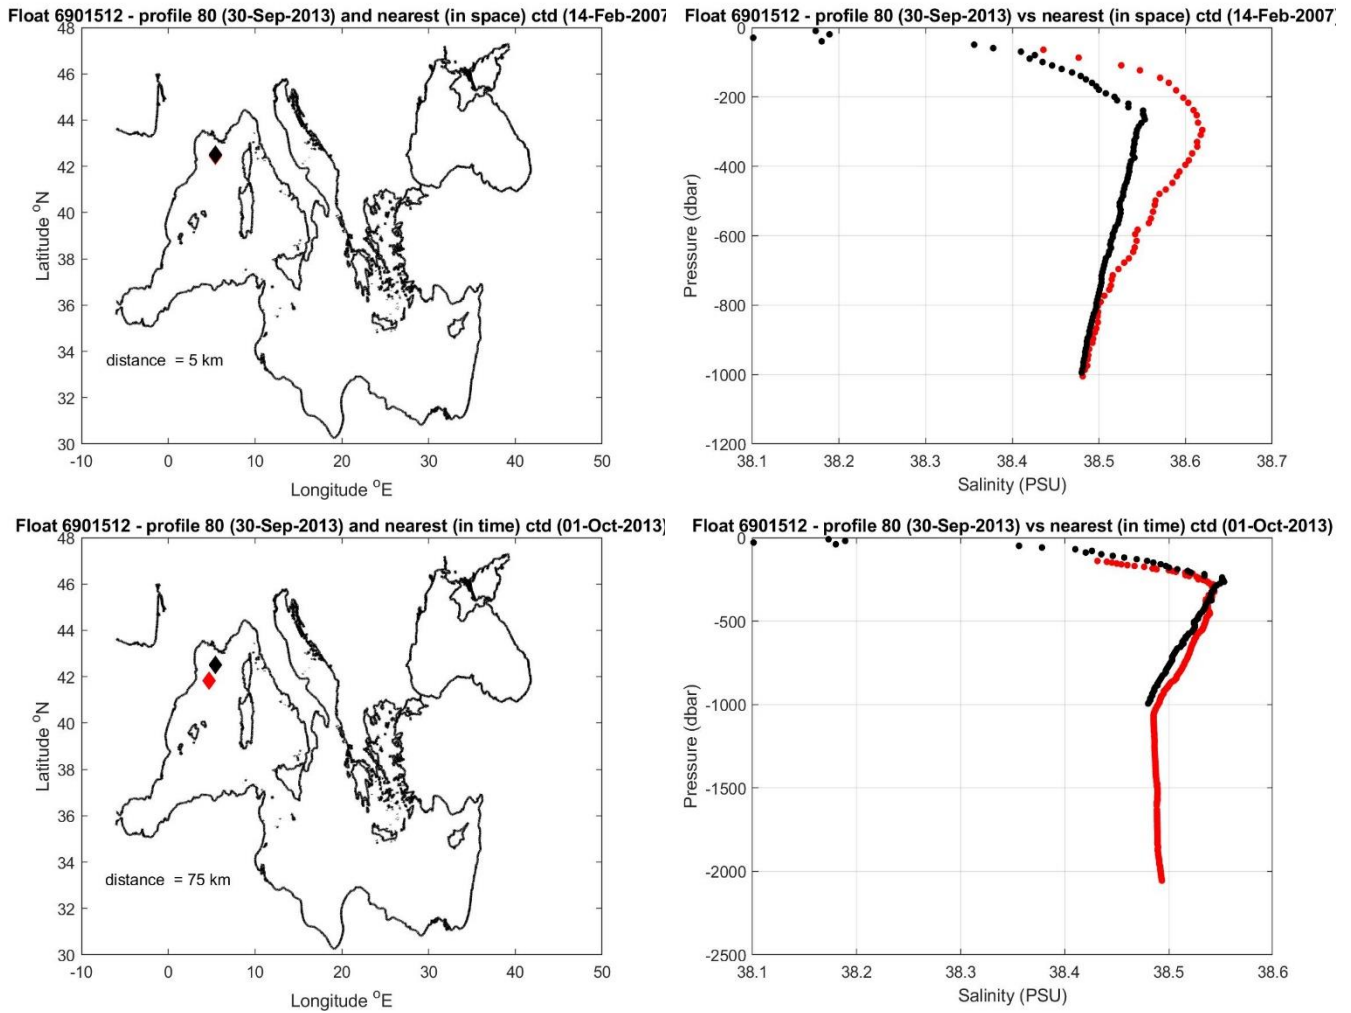

**Figure 10:** Float 6901512. The salinity float profile number 80 (black dots) are compared to the nearest in space (top) and in time (bottom) reference profile (red dots). The locations of the two profiles and their distance is given in the left panel.

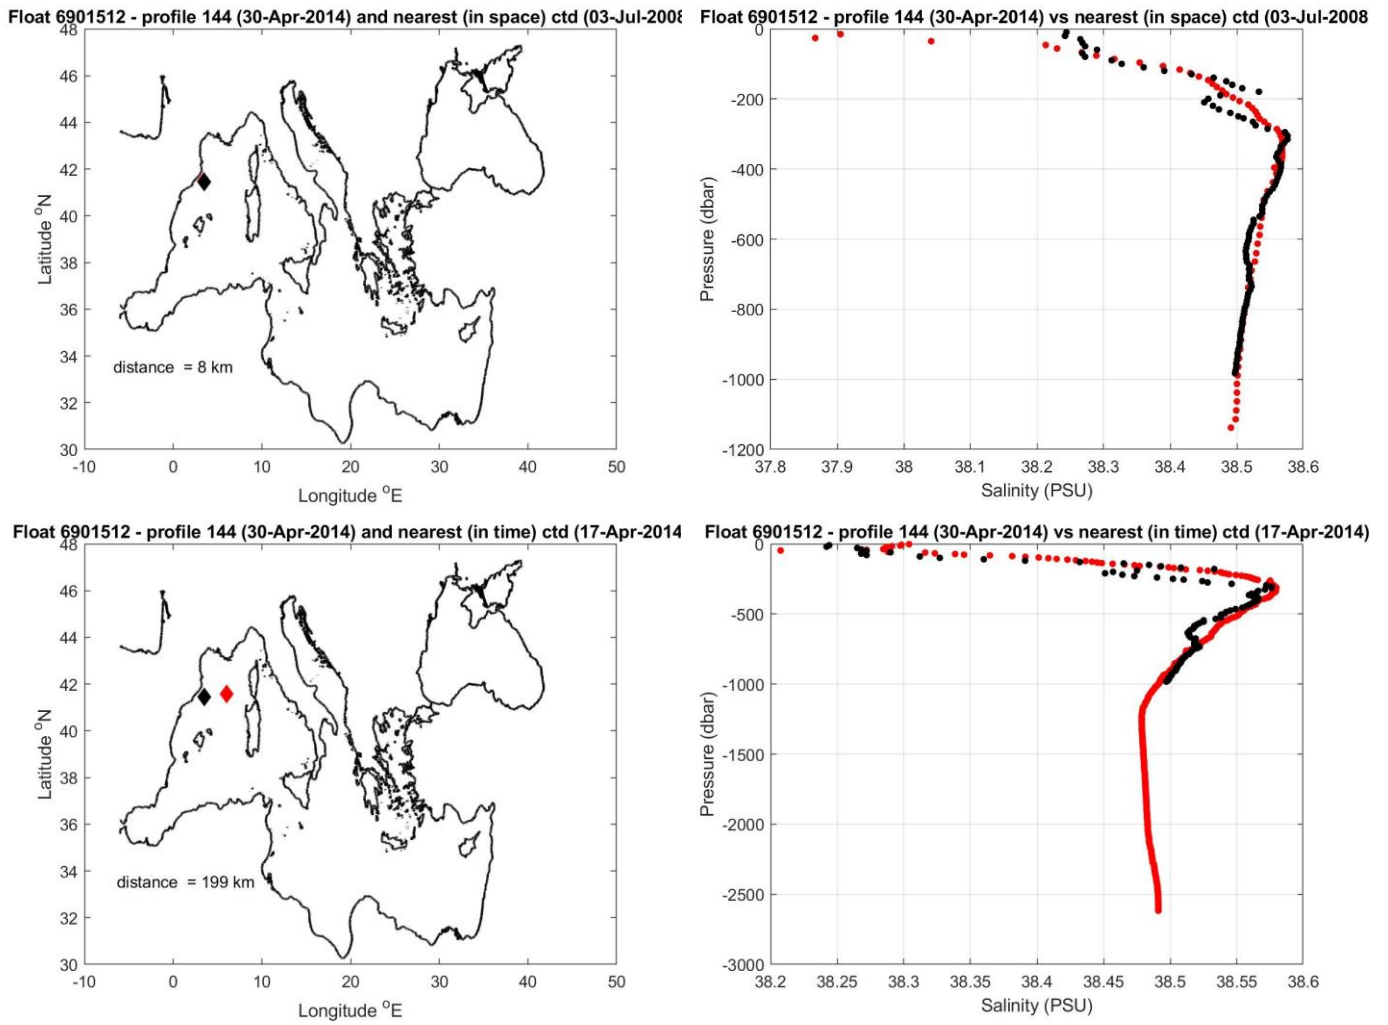

**Figure 11:** Float 6901512. The salinity float profile number 144 (black dots) are compared to the nearest in space (top) and in time (bottom) reference profile (red dots). The locations of the two profiles and their distance is given in the left panel.

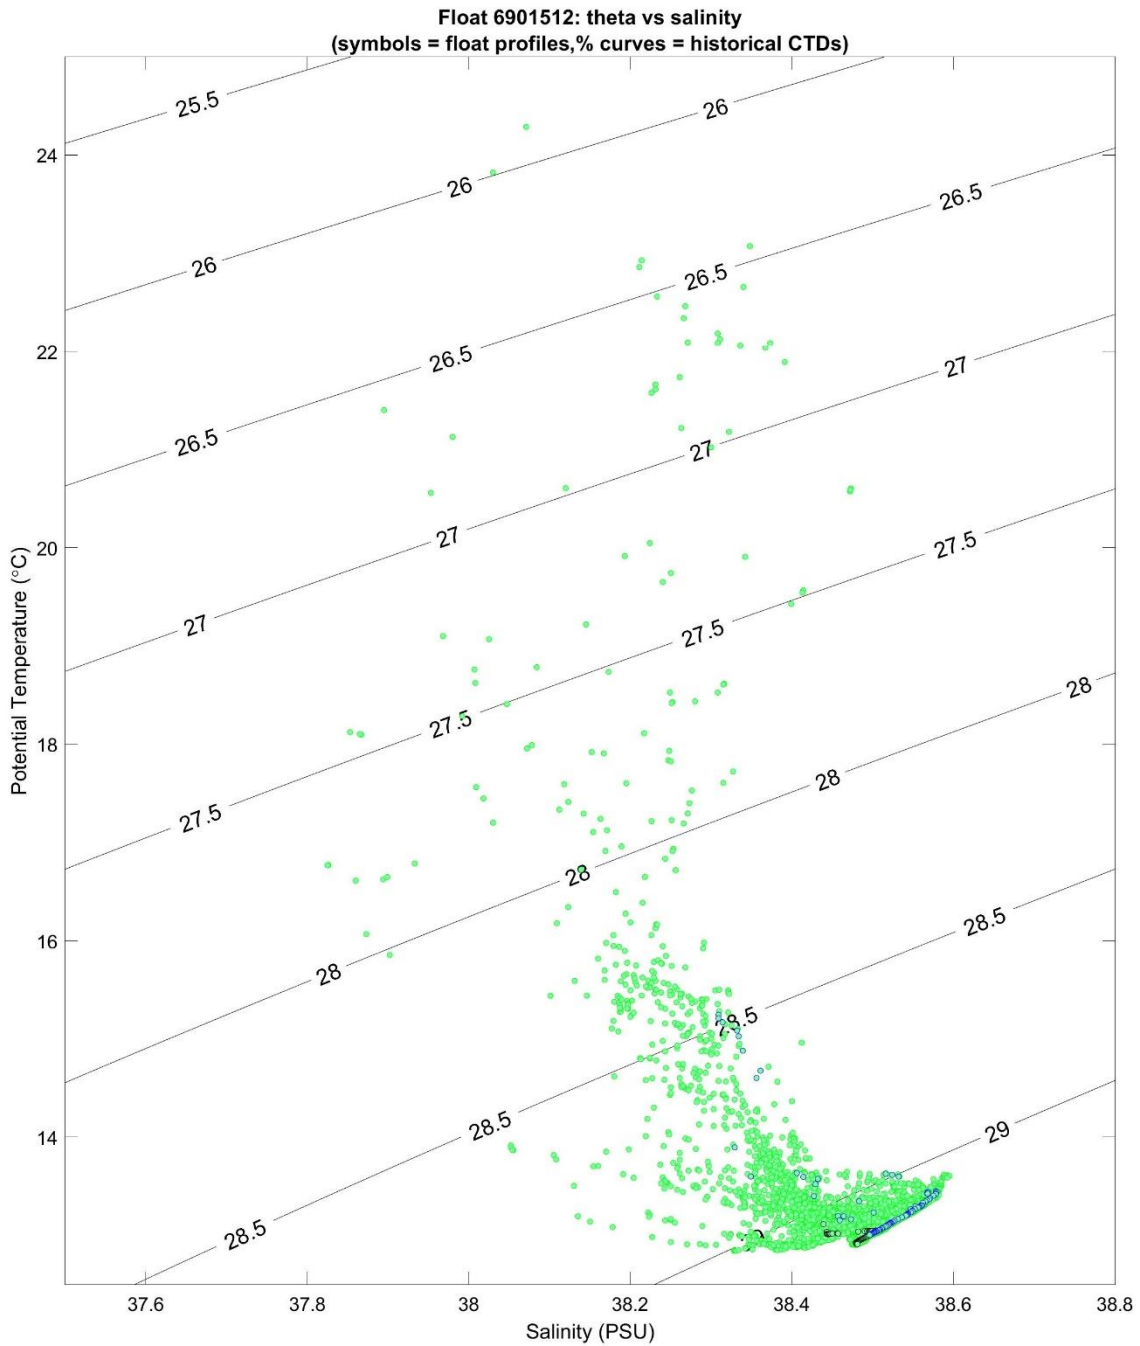

**Figure 12:** Float 6901512. T/S diagram plotted with and data from WMO boxes of CTD reference data +/- 10° of latitude and longitude. The black and blue circles indicate the first and the last Argo profile, respectively. Green symbols represent other Argo profiles from this float. The thin colour lines indicate the reference data.


### 3 Correction of Salinity Data

#### 3.1 Comparison between Argo Float and CTD Climatology

##### 3.1.1 Configurations

Parameters	Value
CONFIG_MAX_CASTS	300
MAP_USE_PV	1
MAP_USE_SAF	0
MAPSCALE_LONGITUDE_LARGE	4
MAPSCALE_LONGITUDE_SMALL	1.33
MAPSCALE_LATITUDE_LARGE	4
MAPSCALE_LATITUDE_SMALL	1.33
MAPSCALE_PHI_LARGE	0.5
MAPSCALE_PHI_SMALL	0.1
MAPSCALE_AGE	10
MAP_P_EXCLUDE	700
MAP_P_DELTA	250

### 3.1.2 Results

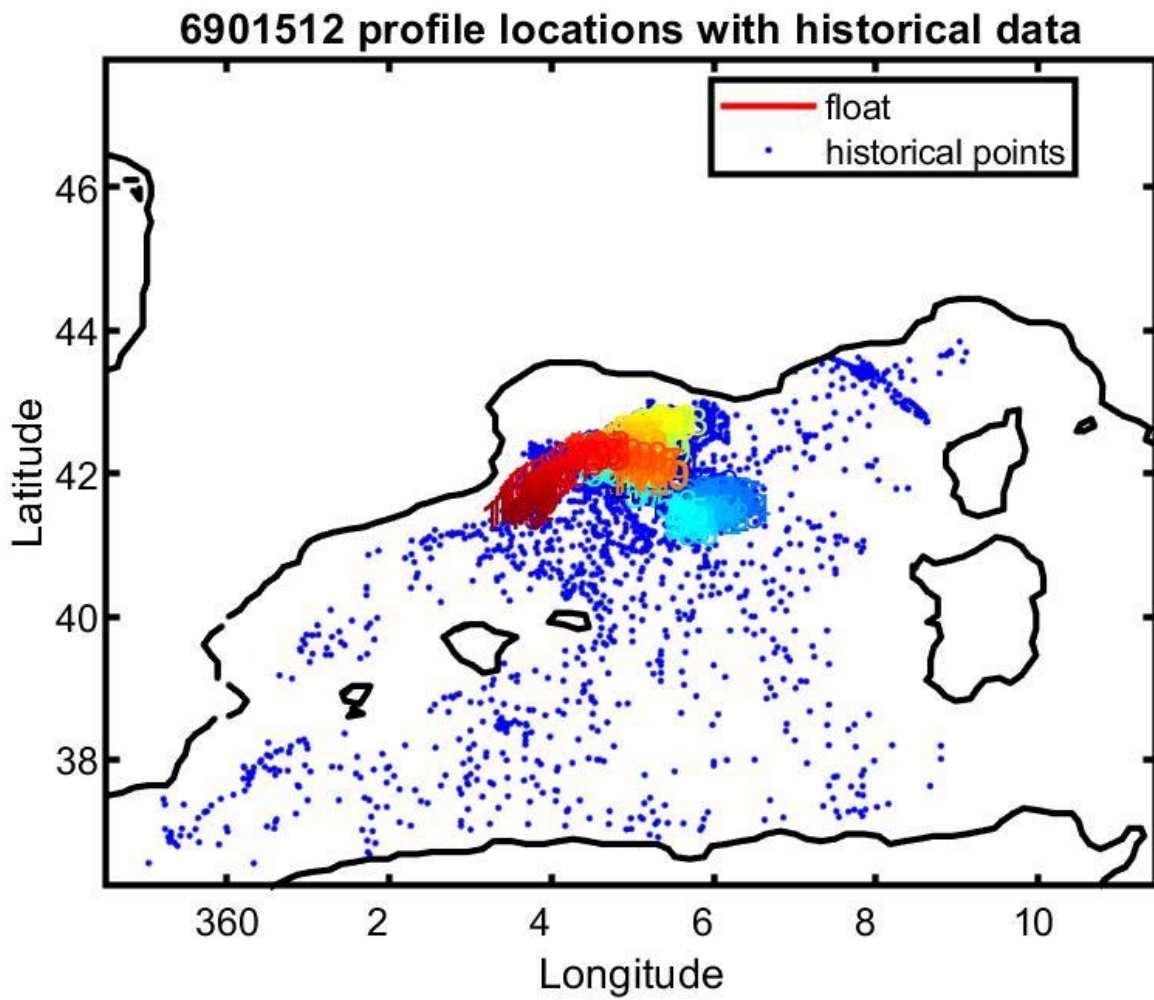

**Figure 13:** Float 6901512. Location of the float profiles (red line with colored numbers) and the reference data selected for mapping (blue dots).



6901512 uncalibrated float data (-) and mapped salinity (o) with objective errors


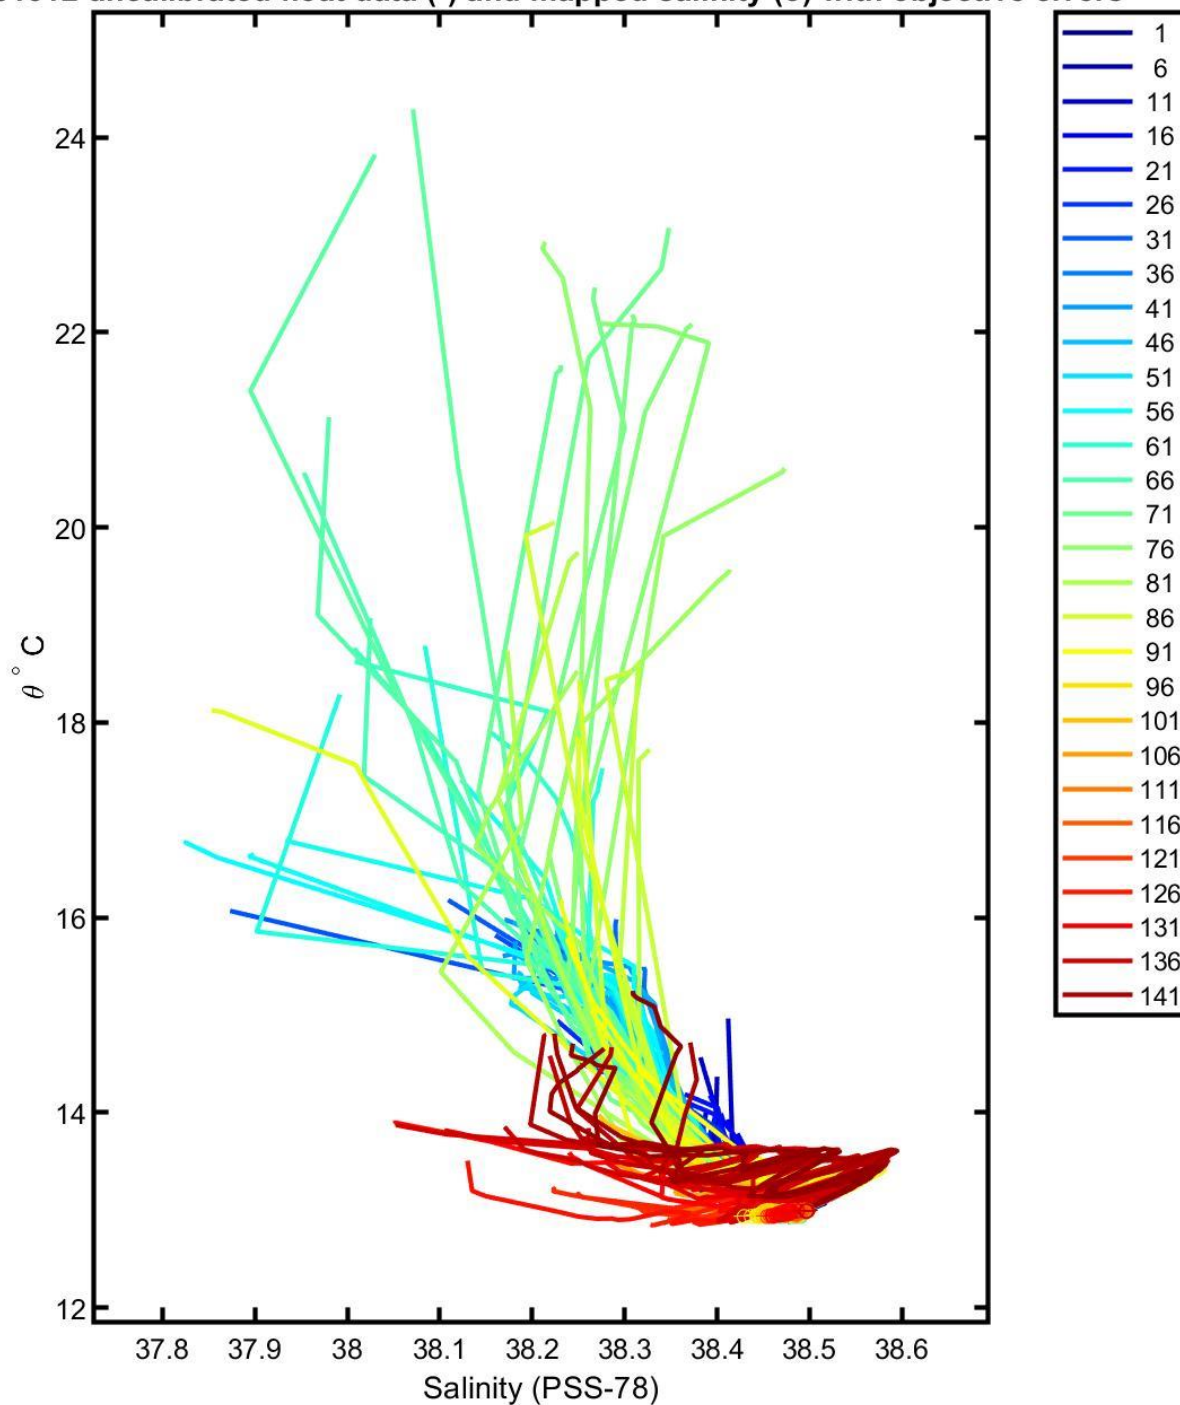



Figure 14: Float 6901512. Plot the original float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.



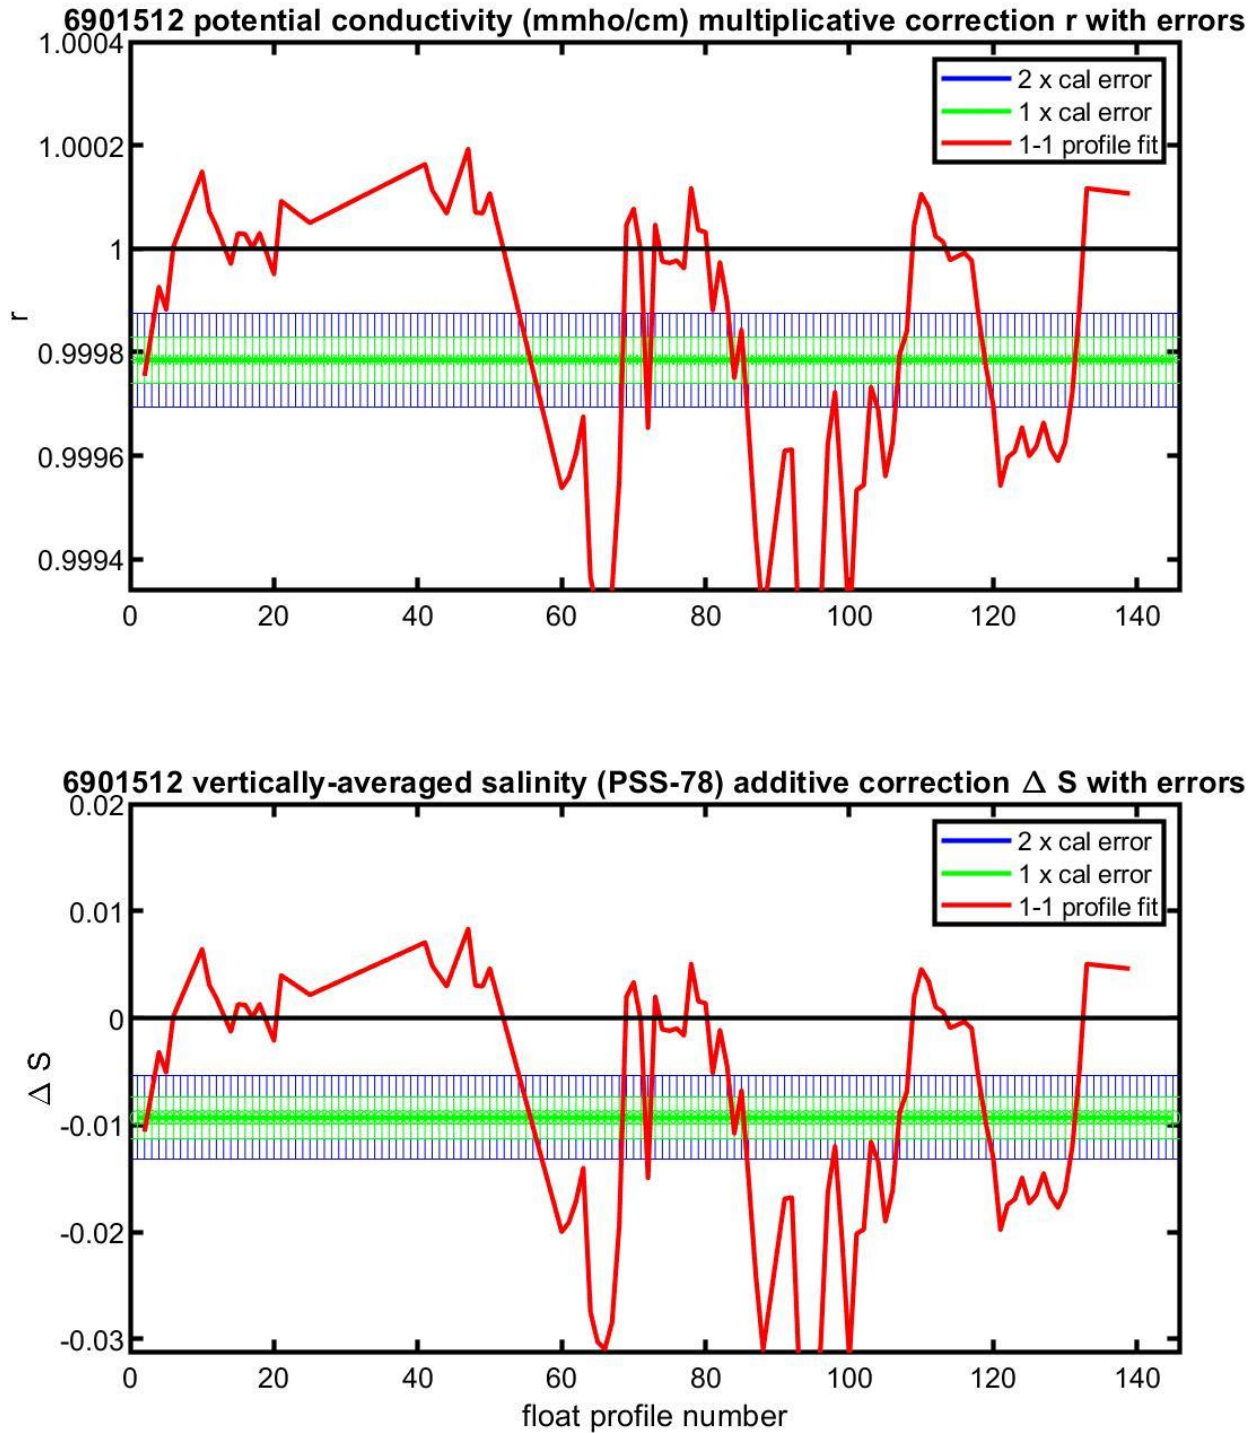


**Figure 15:** Float 6901512. Evolution of the suggested adjustment with time. The top panel plots the potential conductivity multiplicative adjustment. The bottom panel plots the equivalent salinity additive adjustment. The red line denotes one-to-one profile fit that uses the vertically weighted mean of each profile. The red line can be used to check for anomalous profiles relative to the optimal fit.


6901512 calibrated float data (-) and mapped salinity (o) with objective errors

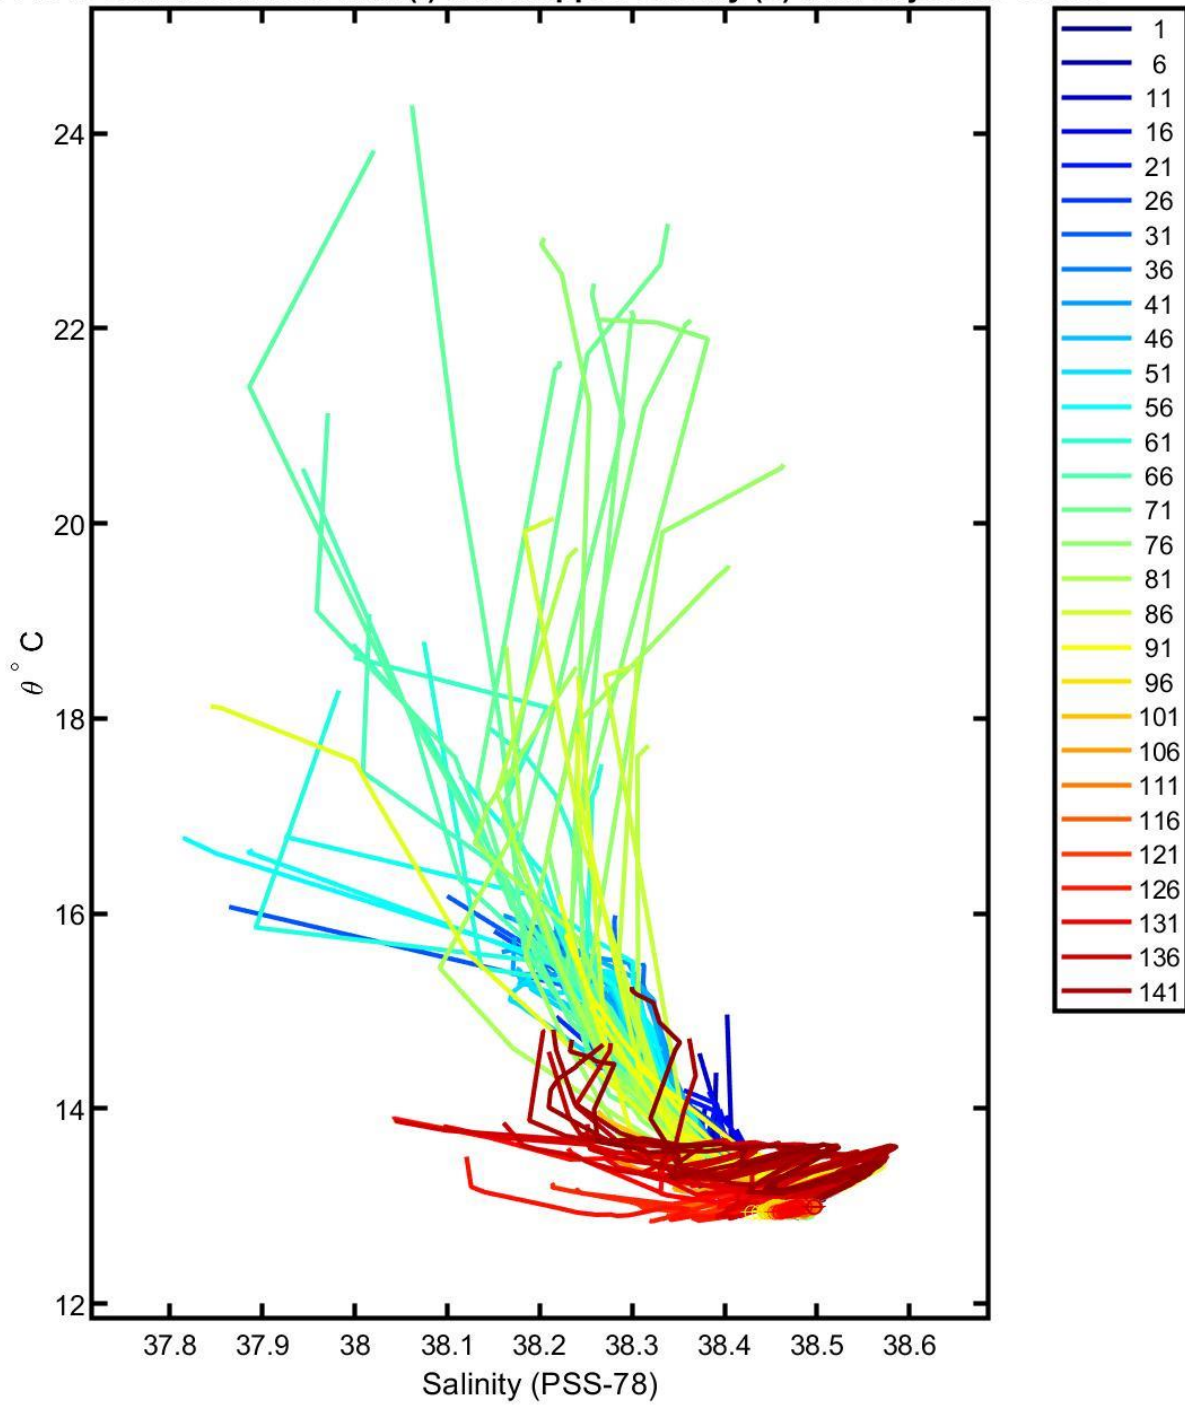

**Figure 16:** Float 6901512. The plot of calibrated float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.

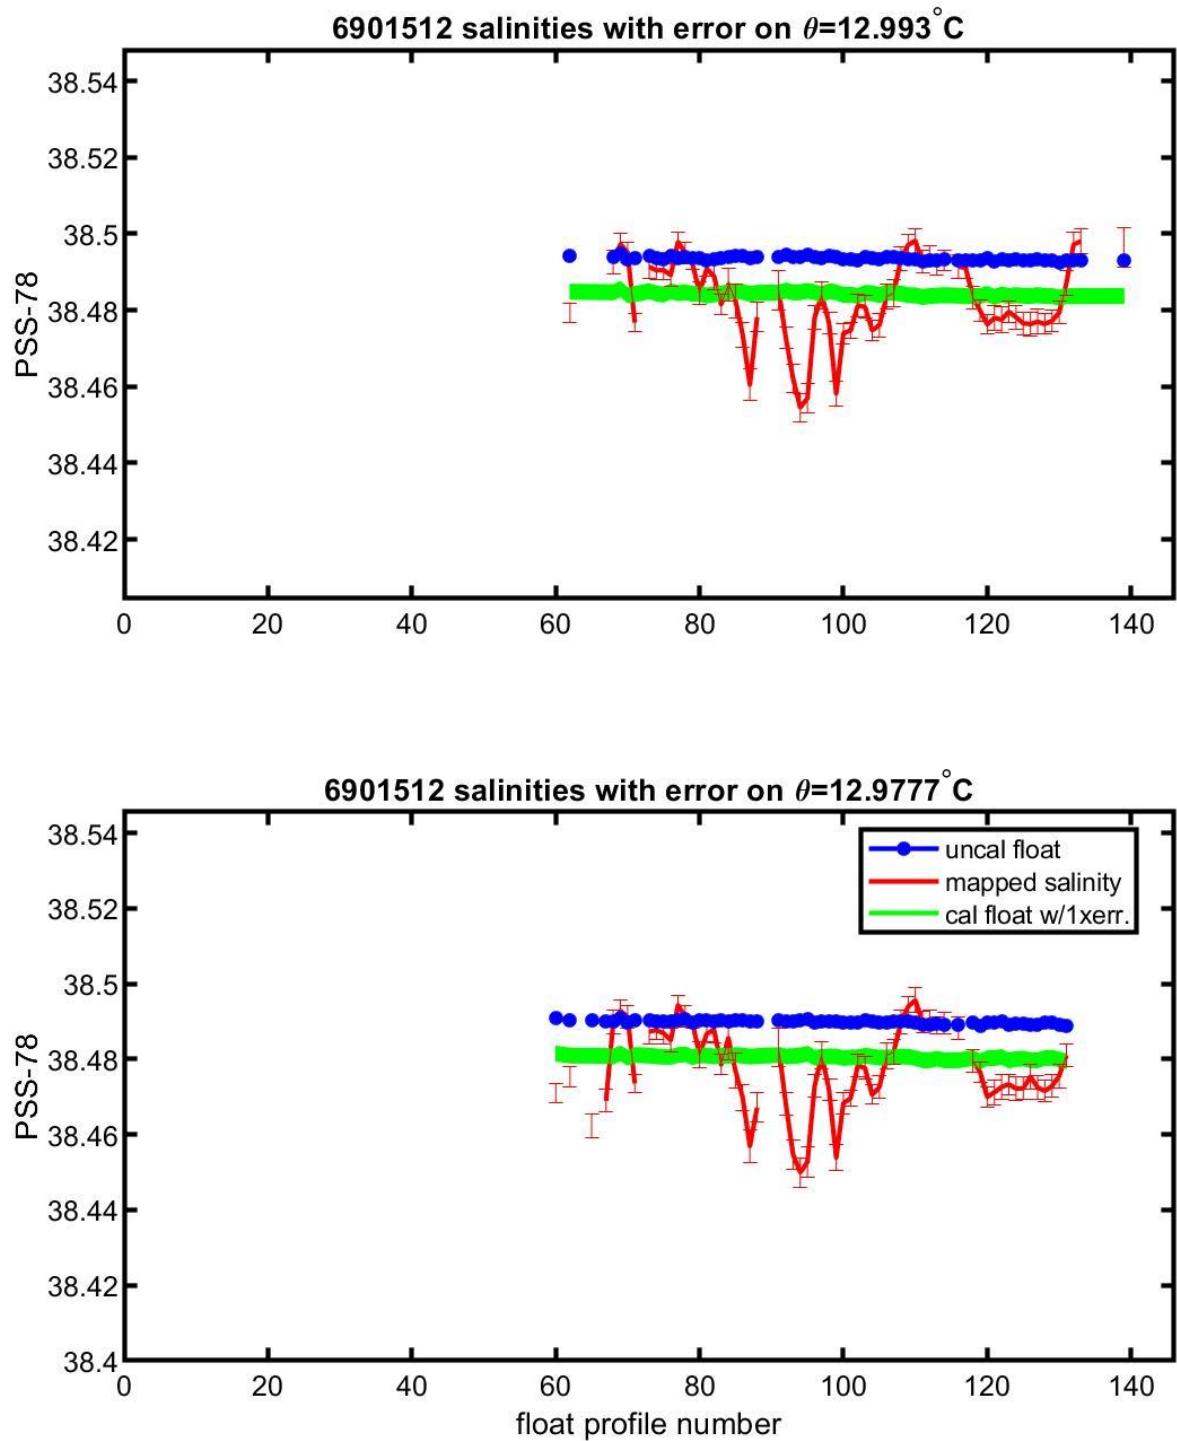


**Figure 17:** Float 6901512. Plots of the evolution of salinity with time along with selected theta levels with minimum salinity variance.

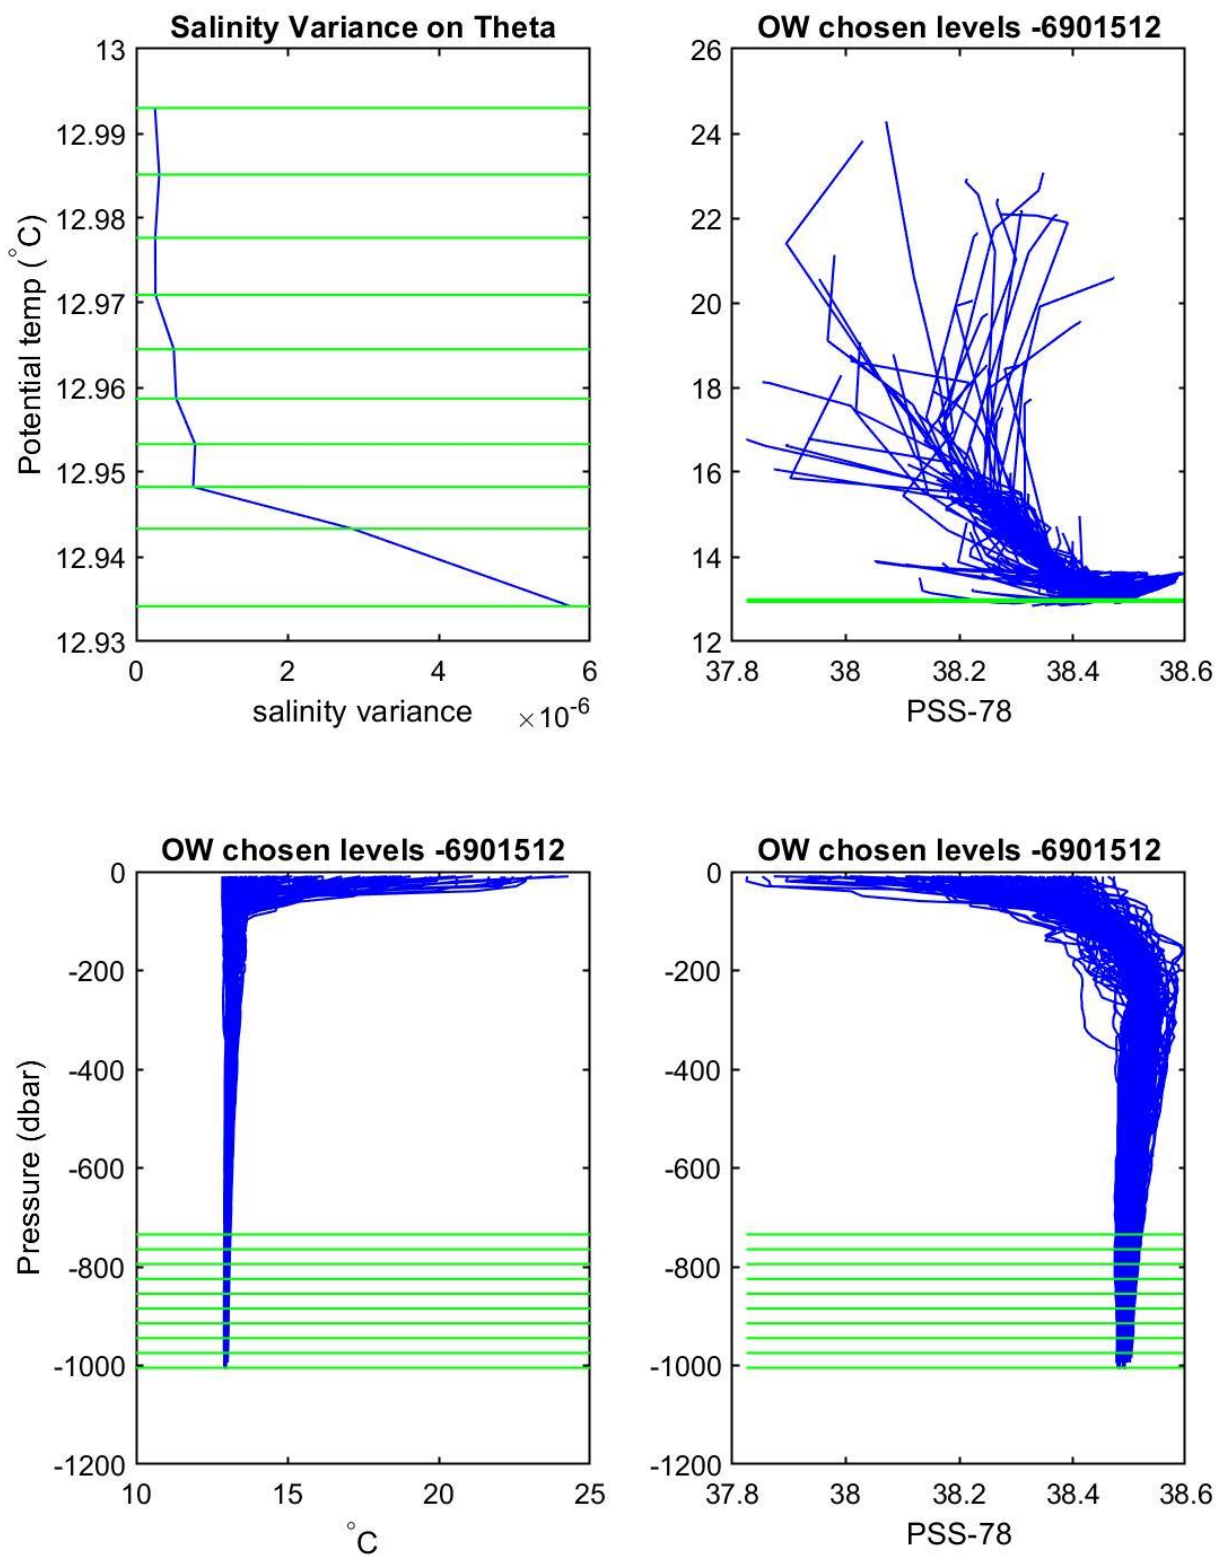

**Figure 18:** Float 6901512. Plots include the theta levels chosen for calibration: Top left: Salinity variance at theta levels. Top right: T/S diagram of all profiles of Argo float. Bottom left: potential temperature plotted against pressure. Bottom right: salinity plotted against pressure.

The analysis of the  $\theta$ -S diagram of profile segments deeper than 700 dbar (Figure 19) shows that the OW method was run where the  $\theta$ -S relationship is the tightest.

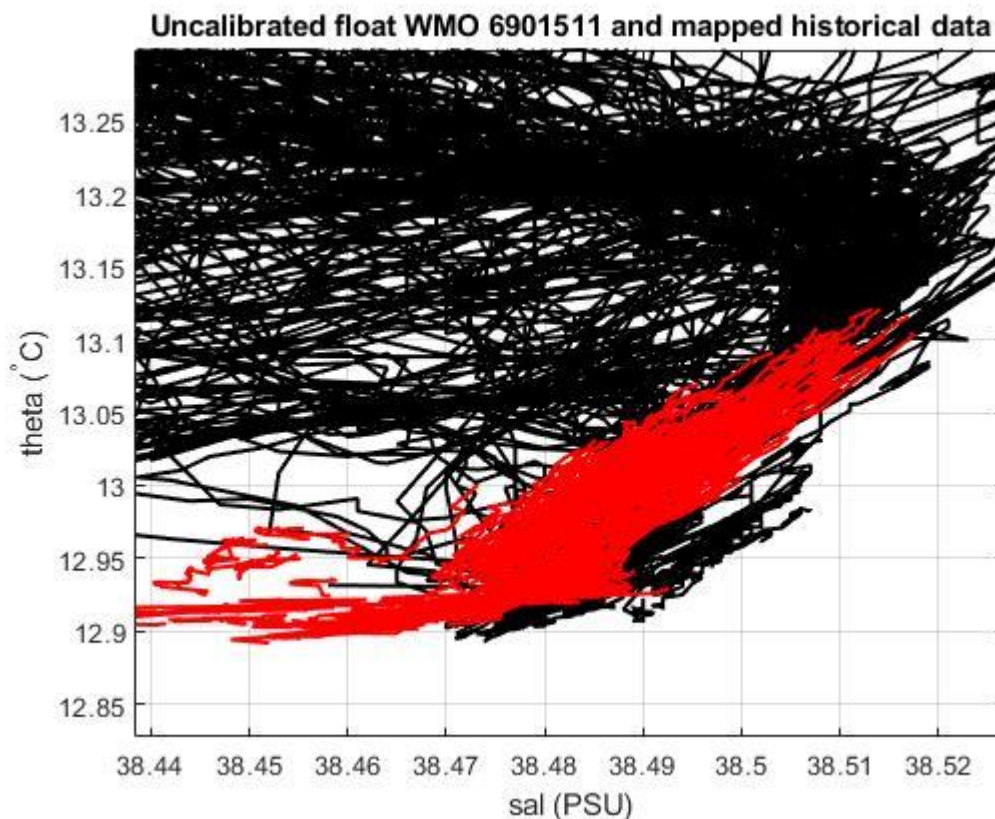


**Figure 19:** Float 6901511. Uncalibrated float salinity profile (black lines) and mapped historical data (red lines) in the most uniform part of the  $\theta$ -S curve.

### 3.2 Comparison between Argo Float


We apply OWC method also using only ARGO float as reference dataset, because the results obtained and showed in previous paragraph seem not reliable.



### 3.2.1 Results

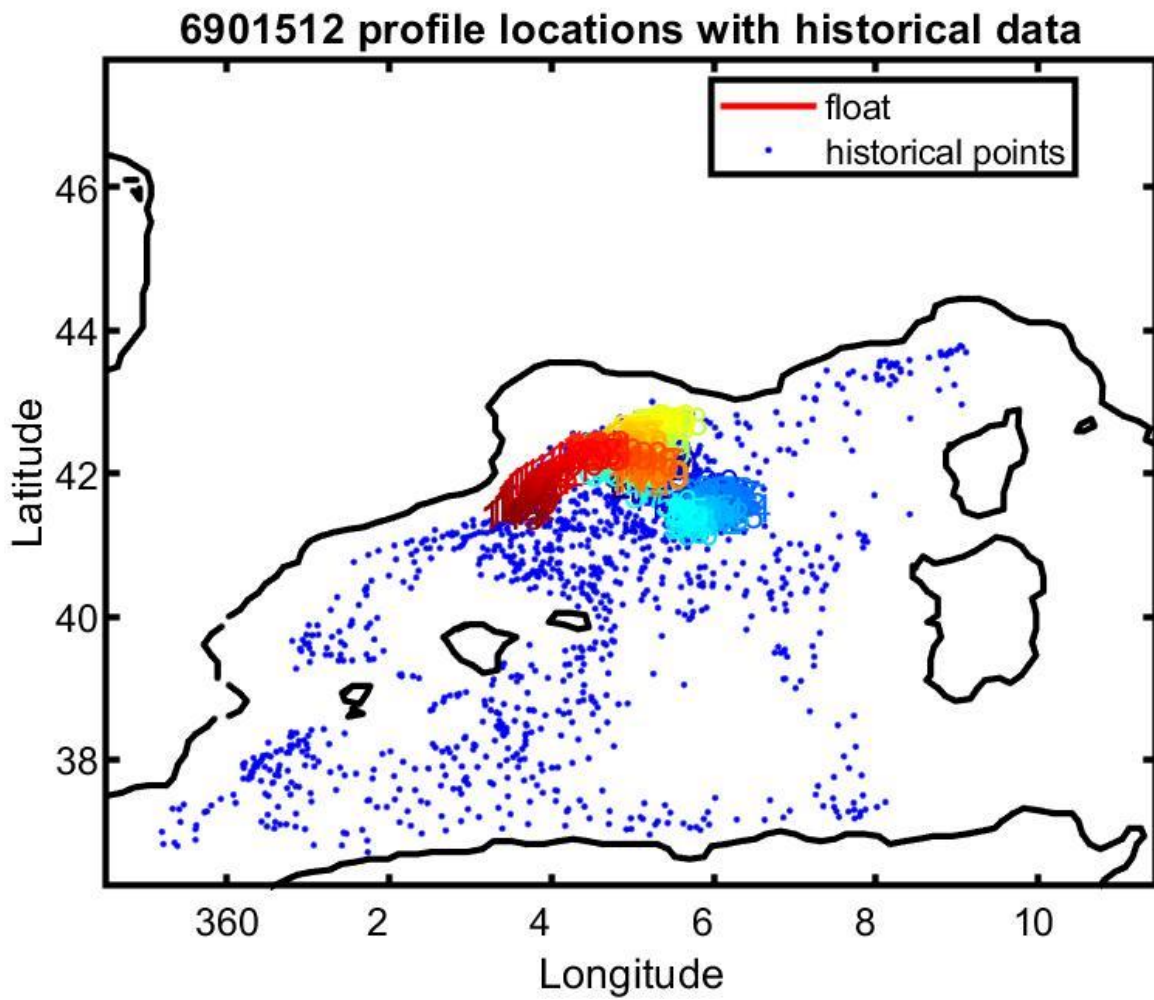


**Figure 20:** Float 6901512. Location of the float profiles (red line with colored numbers) and the reference data selected for mapping (blue dots).

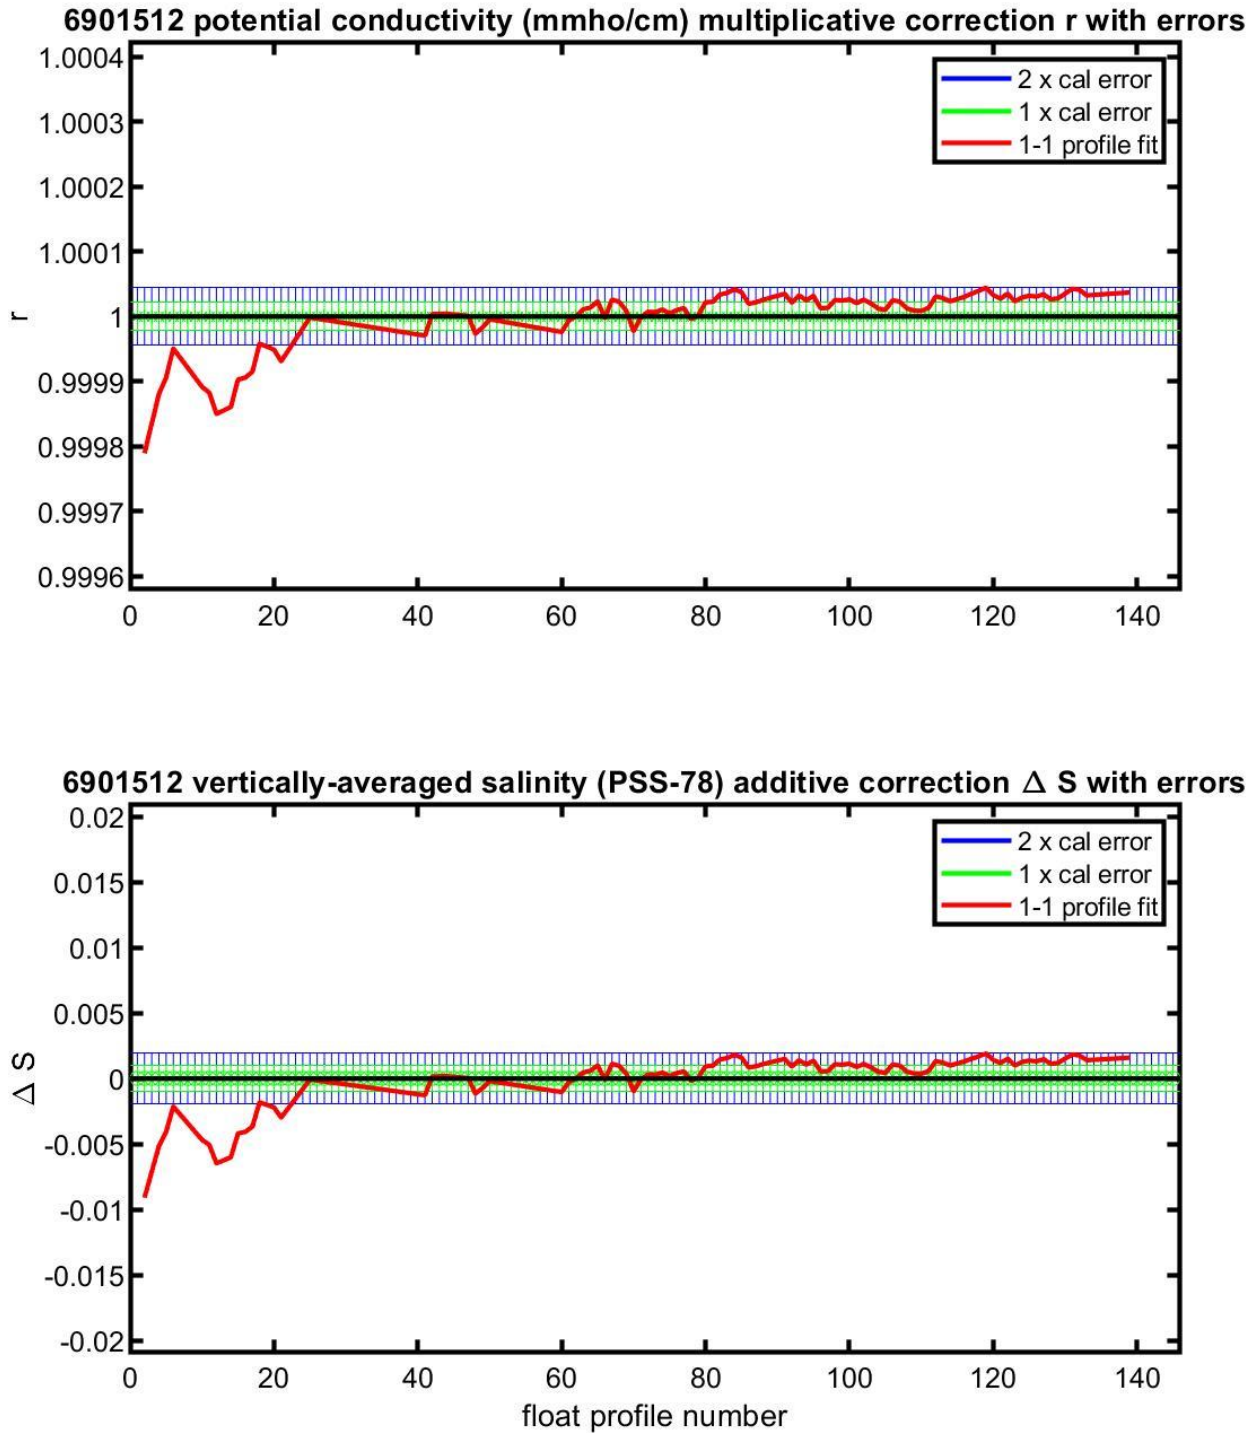


**Figure 21:** Float 6901512. Evolution of the suggested adjustment with time. The top panel plots the potential conductivity multiplicative adjustment. The bottom panel plots the equivalent salinity additive adjustment. The red line denotes one-to-one profile fit that uses the vertically weighted mean of each profile. The red line can be used to check for anomalous profiles relative to the optimal fit.

6901512 calibrated float data (-) and mapped salinity (o) with objective errors

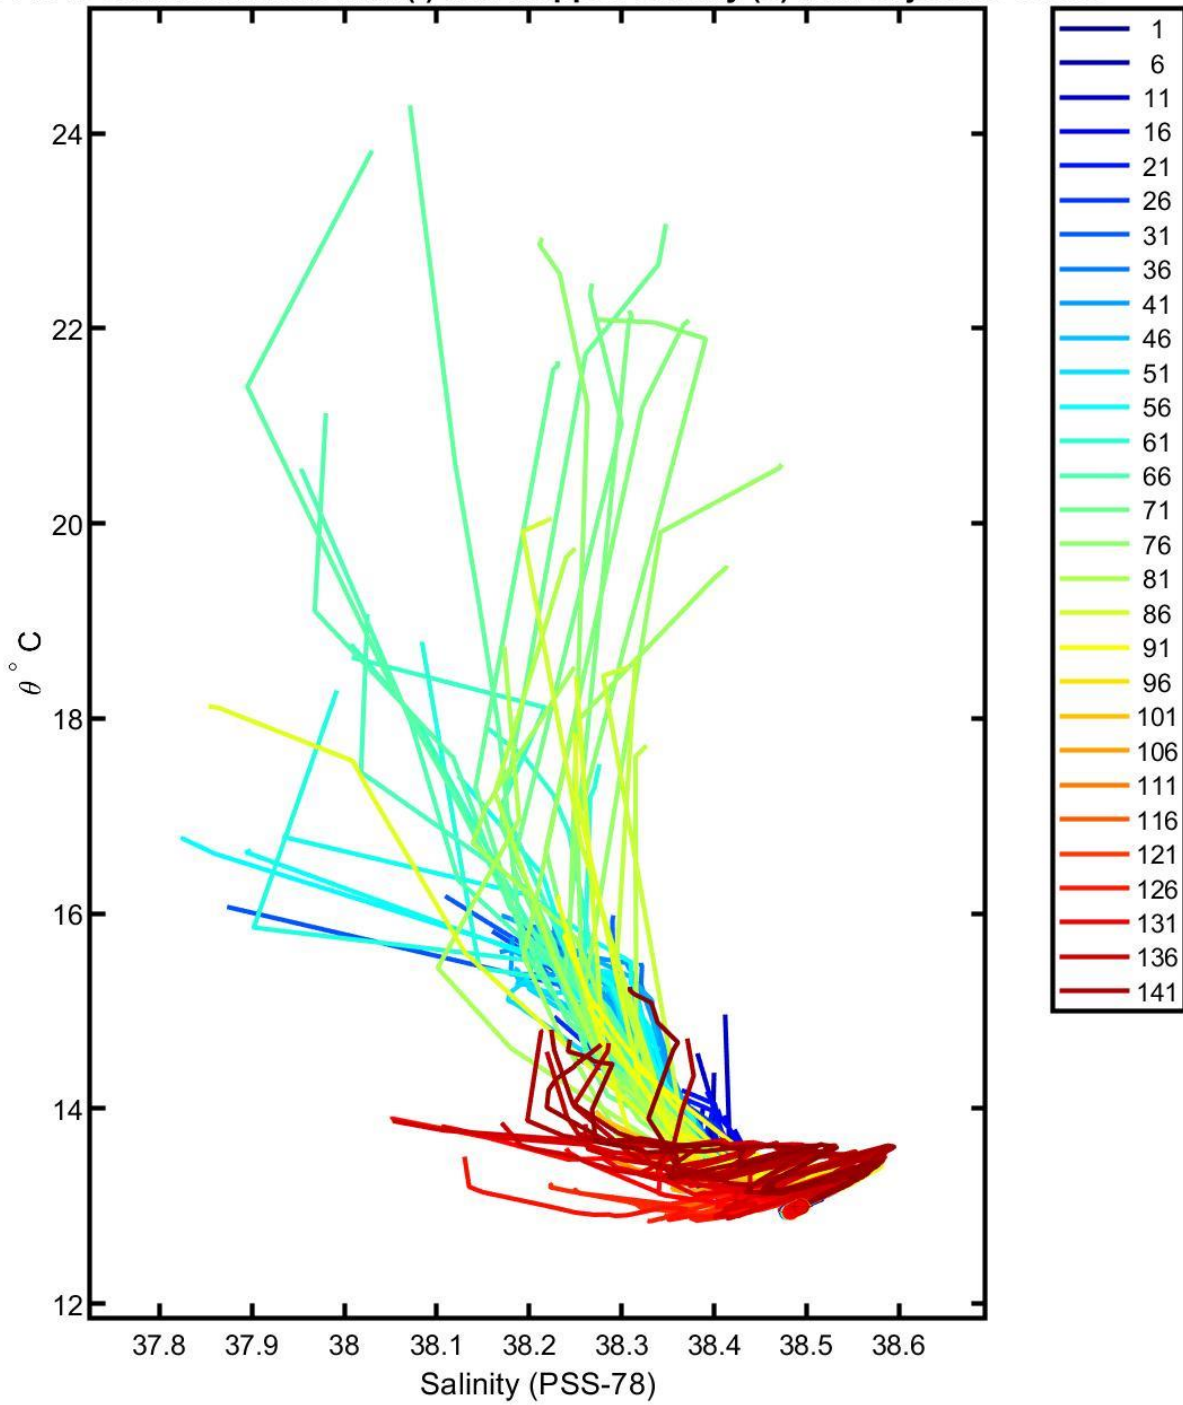


**Figure 22:** Float 6901512. The plot of calibrated float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.



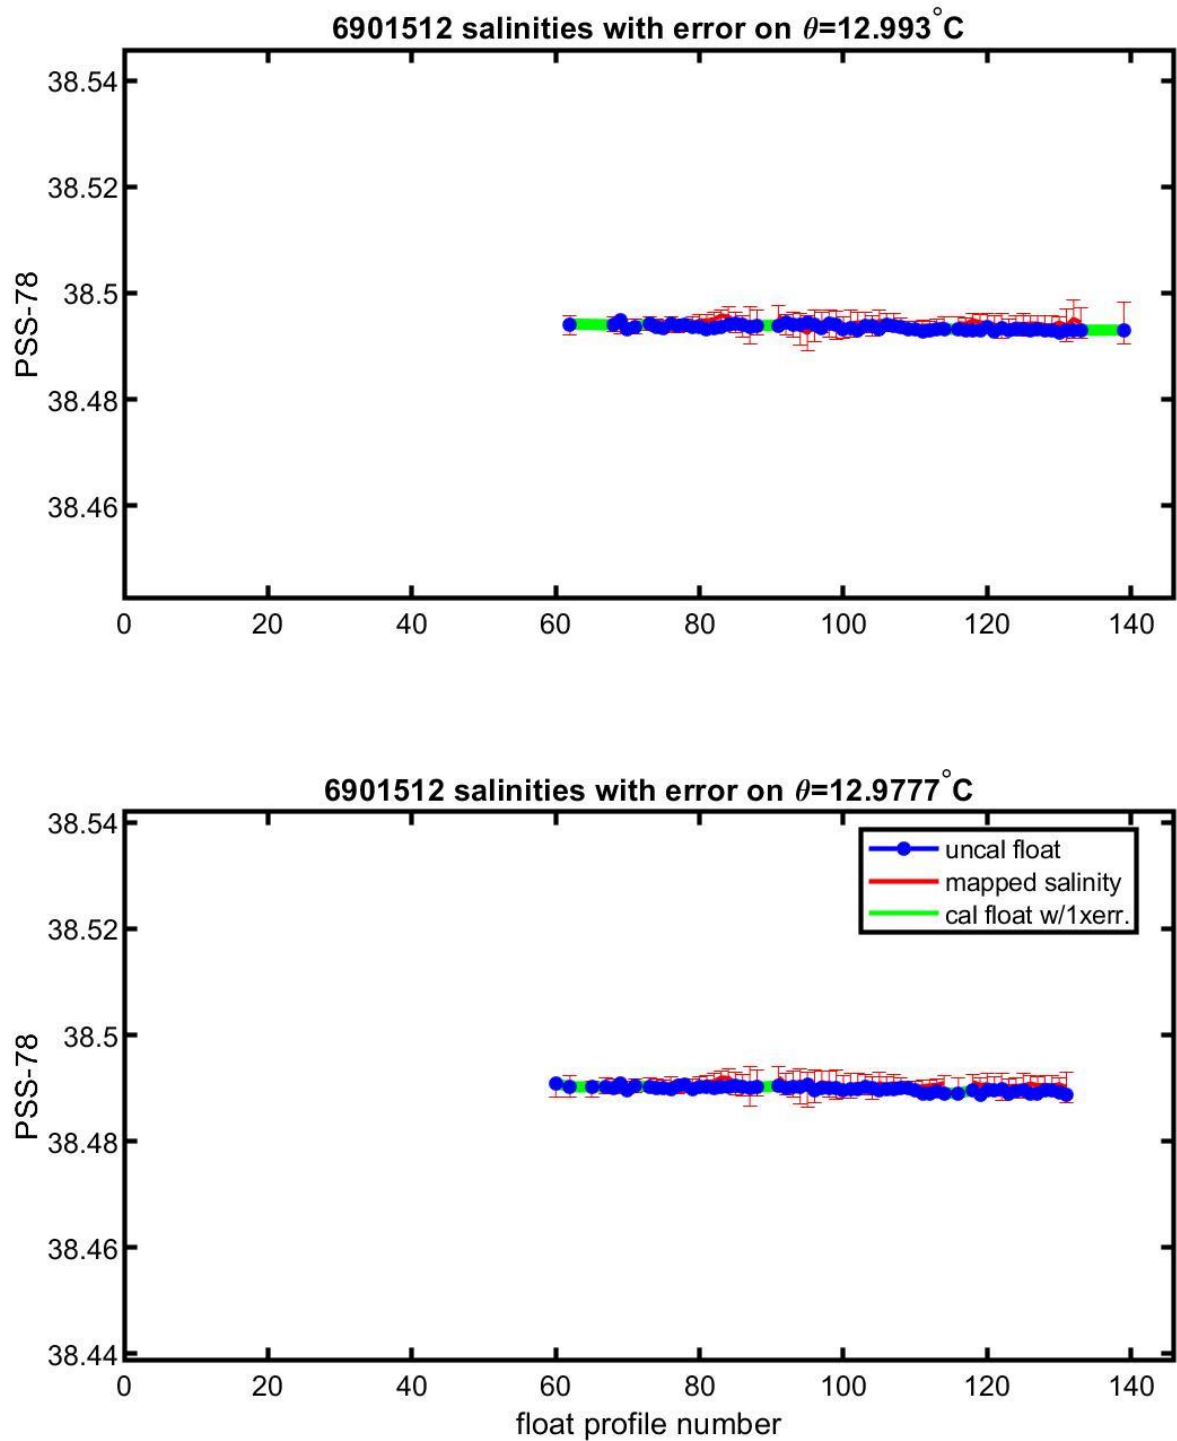

**Figure 23:** Float 6901512. Plots of the evolution of salinity with time along with selected theta levels with minimum salinity variance.

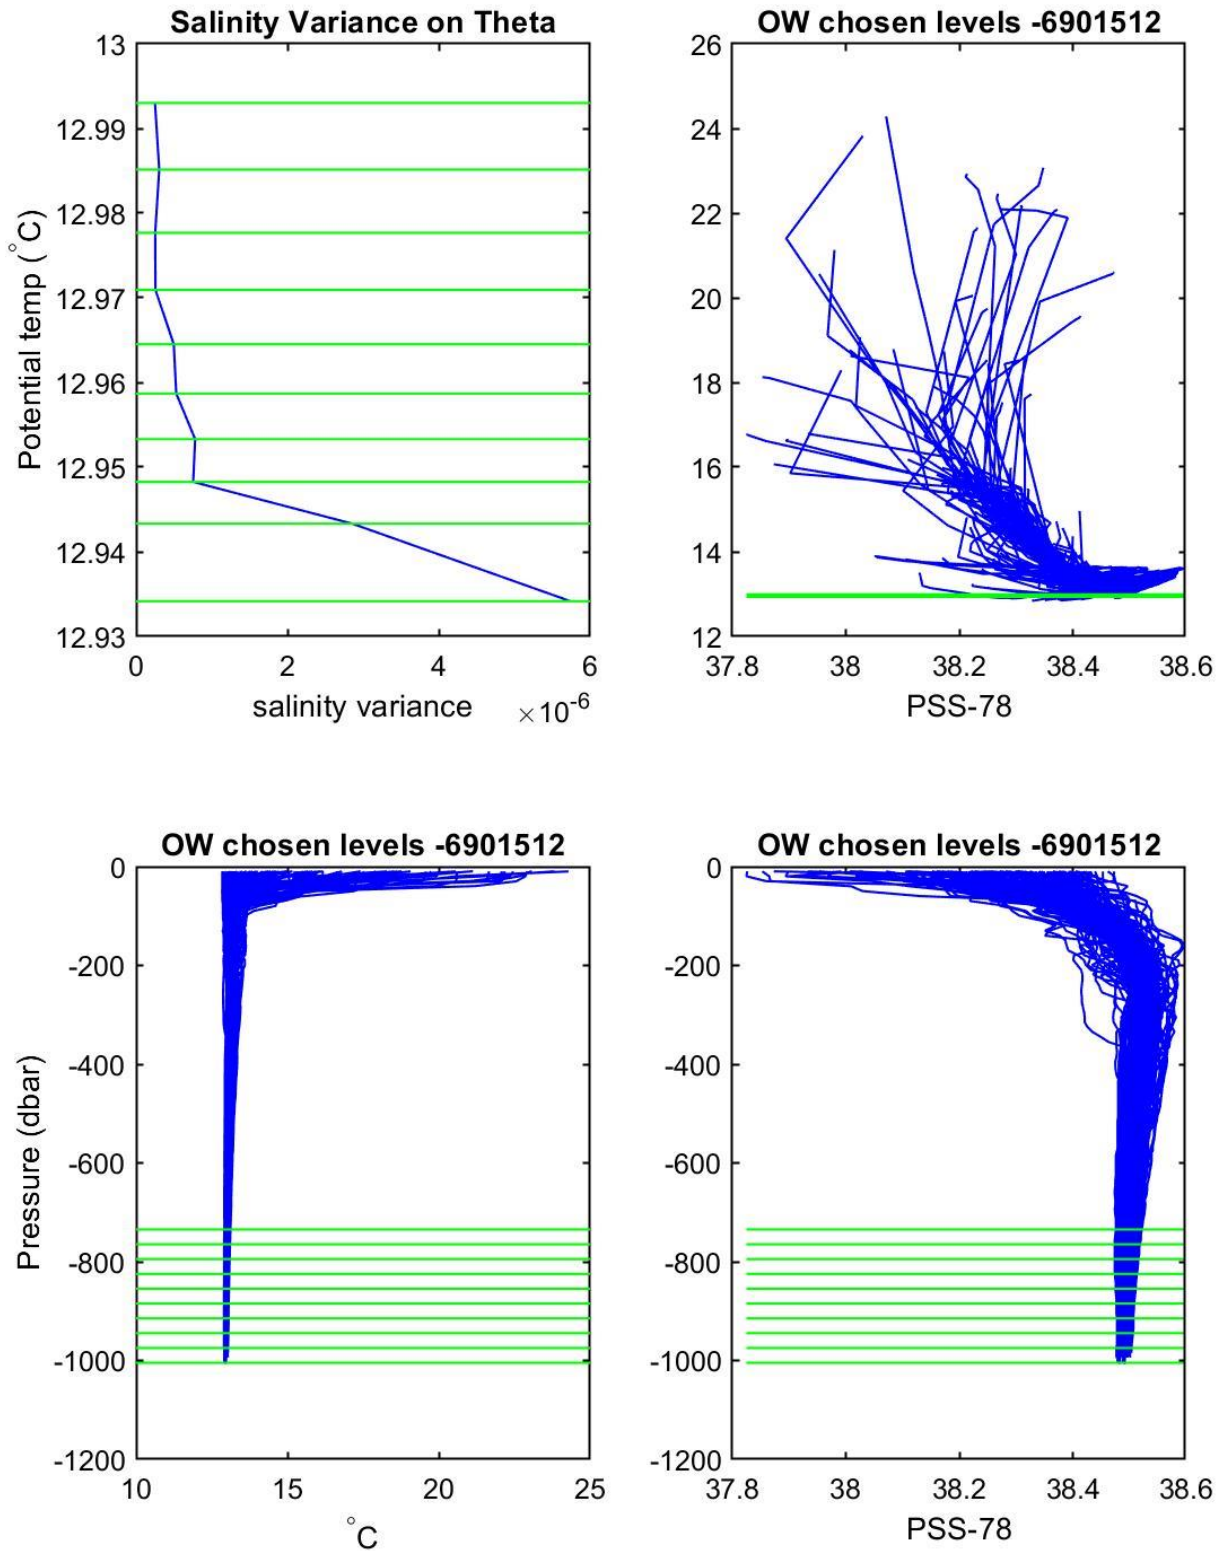

**Figure 24:** Float 6901512. Plots include the theta levels chosen for calibration: Top left: Salinity variance at theta levels. Top right: T/S diagram of all profiles of Argo float. Bottom left: potential temperature plotted against pressure. Bottom right: salinity plotted against pressure.

#### 4 Comparison between Argo float under study and other Argo float in the same area

The float WMO 6901471 (Figure 20), is selected to perform a comparison with the float under study to obtain additional qualitative analysis.

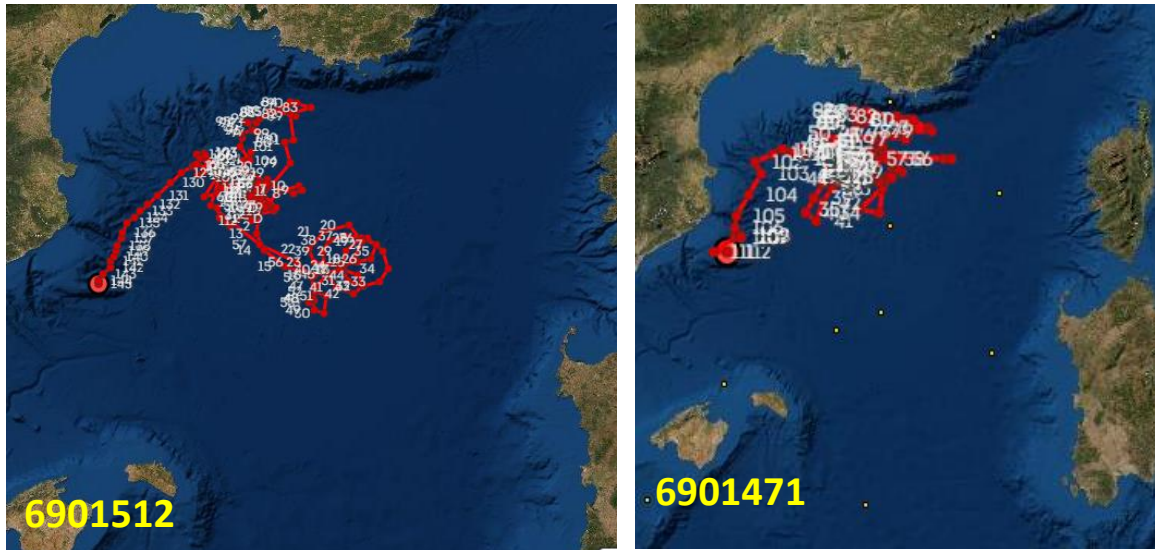


Figure 25: Float 6901512. Trajectory of the floats used for the comparison.

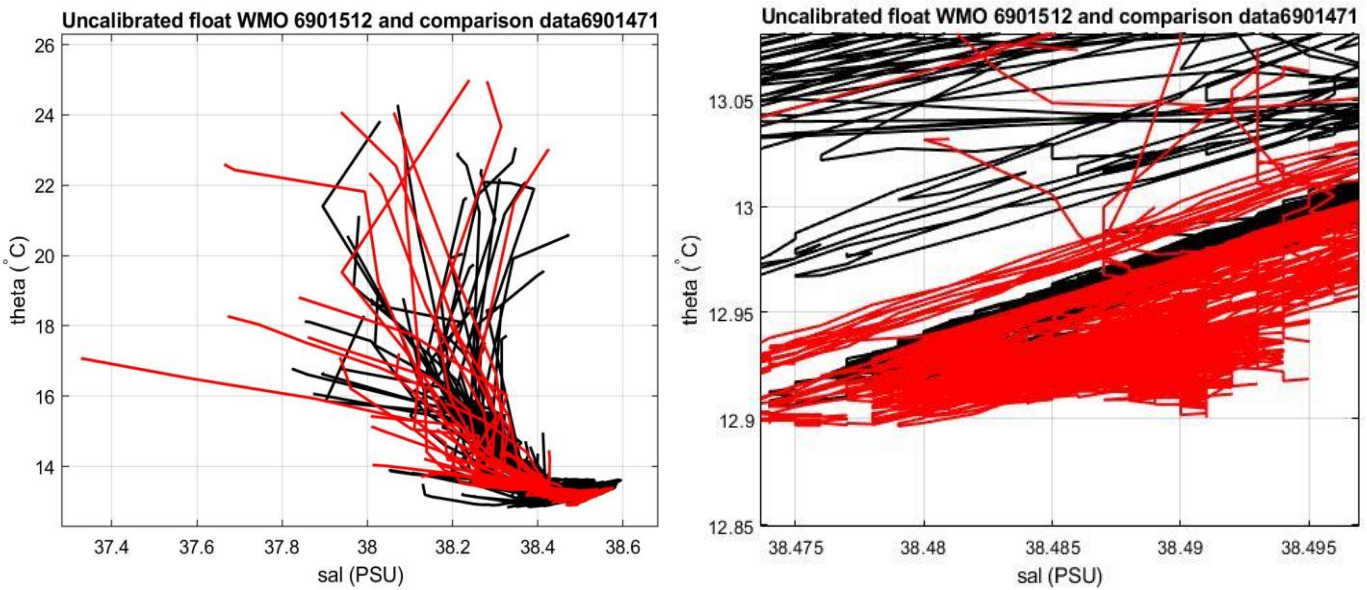


Figure 26: Float 6901512. Comparison between float 6901512 (black line) and float 6901471 (red line) on the left. On the right zoom in the most uniform part of the  $\theta$ -S curve.

## 5 Summary

Float was deployed in the Liguro-Provencal sub-basin, in the Mediterranean Sea. During its lifetime, the float passed in Algerian and Catalan sub basin where died. The most favorable water masses, which are useful for comparison with climatology is relatively stable intermediate and deep waters from around 700 m. The initial comparison between Argo float and reference data shows no potential salinity offset/drift. This float was not DMQC-ed before.

The OWC analysis was done twice: at first with Argo float and CTD climatology as reference dataset, and then only with Argo float. The results of the first application show a potential salinity offset/drift. Figure 15 reveals that the least square fit could have uncertainties Figure 17 shows a possible offset. The results obtained using only Argo float indicate no potential salinity offset/drift. Figure 21 indicates the proposed correction is very small and below the Argo requested accuracy (0.01). Figure 23 shows that the float salinity is quite constant on selected  $\theta$ -levels. A comparison with another float is made in order to have an additional qualitative analysis. The float 6901471 has QC 1 for physical parameters after DMQC analysis. Figure 26 shows a good comparison between the two floats. After several analyses, the last decision is that the salinity data of float WMO 6901512 is accurate and doesn't need a delayed mode correction. QC=1 is applied.

PSAL\_ADJUSTED=PSAL from cycle 1 to 145

The quality flags applied are the following:

PSAL\_ADJUSTED\_QC='1' from cycle 1 to 145

The delayed-mode files (Dfiles) have been created accordingly and sent to the Coriolis GDAC.

## 6 References

Cabanes, C., Thierry, V., & Lagadec, C. (2016). Improvement of bias detection in Argo float conductivity sensors and its application in the North Atlantic. *Deep-Sea Research Part I: Oceanographic Research Papers*, 114, 128–136. <https://doi.org/10.1016/j.dsr.2016.05.007>