


Delayed Mode Quality Control of Argo float WMO 6903196

Antonella Gallo
ORCID ID: 0000-0002-8836-1550

National Institute of Oceanography and Applied Geophysics - OGS
Borgo Grotta Gigante 42/C - 34010 - Sgonico (TS) – Italy
08/06/2021

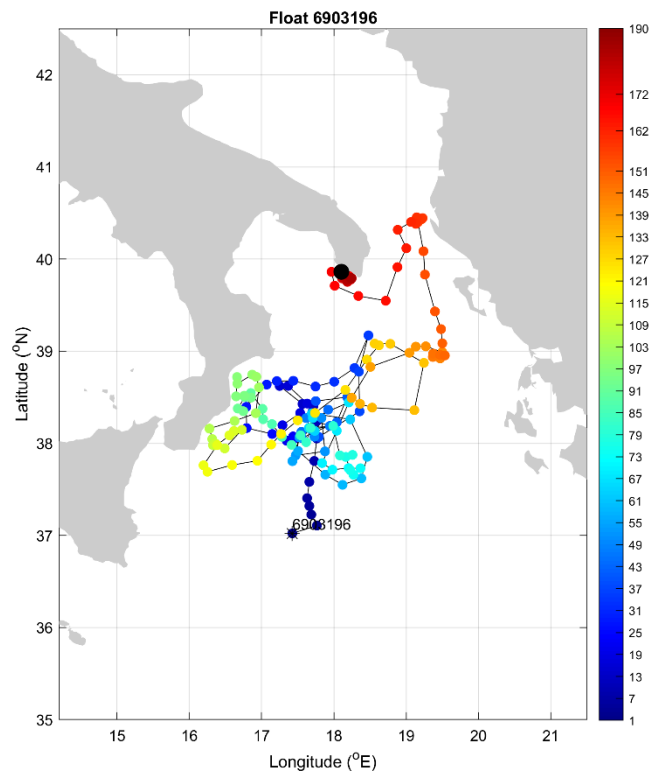

Contents

1	Introduction	3
2	Quality Check of Argo Float Data	4
2.1	Verification of Real-time Mode QC flags	4
2.2	Satellite Altimeter Report	5
2.3	Time Series of Argo Float Temperature and Salinity	6
2.4	Comparison Between Argo Float and Climatology	8
3	Sea surface pressure calibrations	14
4	Correction of Salinity Data	15
4.1	Comparison between Argo Float and CTD Climatology	15
4.1.1	Configurations	15
4.1.1	Results	16
5	Comparison between Argo float under study and other Argo float in the same area	23
6	Summary	25
7	References	25

1 Introduction

This report includes the delayed mode analysis performed for float 6903196. It was deployed in Mediterranean Sea (ionian sub-basin) in May 2016 and after performed 190 cycles died. Before the analysis, real-time QC flags were visually inspected. The list of flags applied is QC=1 to all cycles. Then, the satellite altimeter comparison plot between the sea surface height and dynamic height anomaly, constructed for this float by Ifremer, was analyzed. Plots of temperature and salinity time series and plots of temperature, salinity and density plotted against the nearby historical CTD profiles was generated. This visual analysis can help in detecting sensor salinity anomalies and spikes.

The reference dataset used is composed of the following CTD and Argo historical datasets:

CTD:

- CMEMS: INSITU_MED_TS_REP_OBSERVATIONS_013_041
- Coriolis: CTD_for_DMQC_2018V01
- Historical CTD profiles provided through personal contact

Argo:

- ARGO_for_DMQC_2018V01

Float 6903196 is the Apex float, where the pressure sensor is not auto-corrected to zero while at the sea surface. For this sensor the pressure data will be corrected during processing in delayed mode if necessary. The procedures of correction sea surface pressure are described in Argo Quality Control Manual for CTD and Trajectory Data (Wong et al., 2020).

The OWC was run to estimate a salinity offset and a salinity drift (Cabanès et al., 2016).

2 Quality Check of Argo Float Data

2.1 Verification of Real-time Mode QC flags

The list of flags applied to the float in real-time mode is as follows.

Cycle number:

1-190 PSAL QC=1

2.2 Satellite Altimeter Report

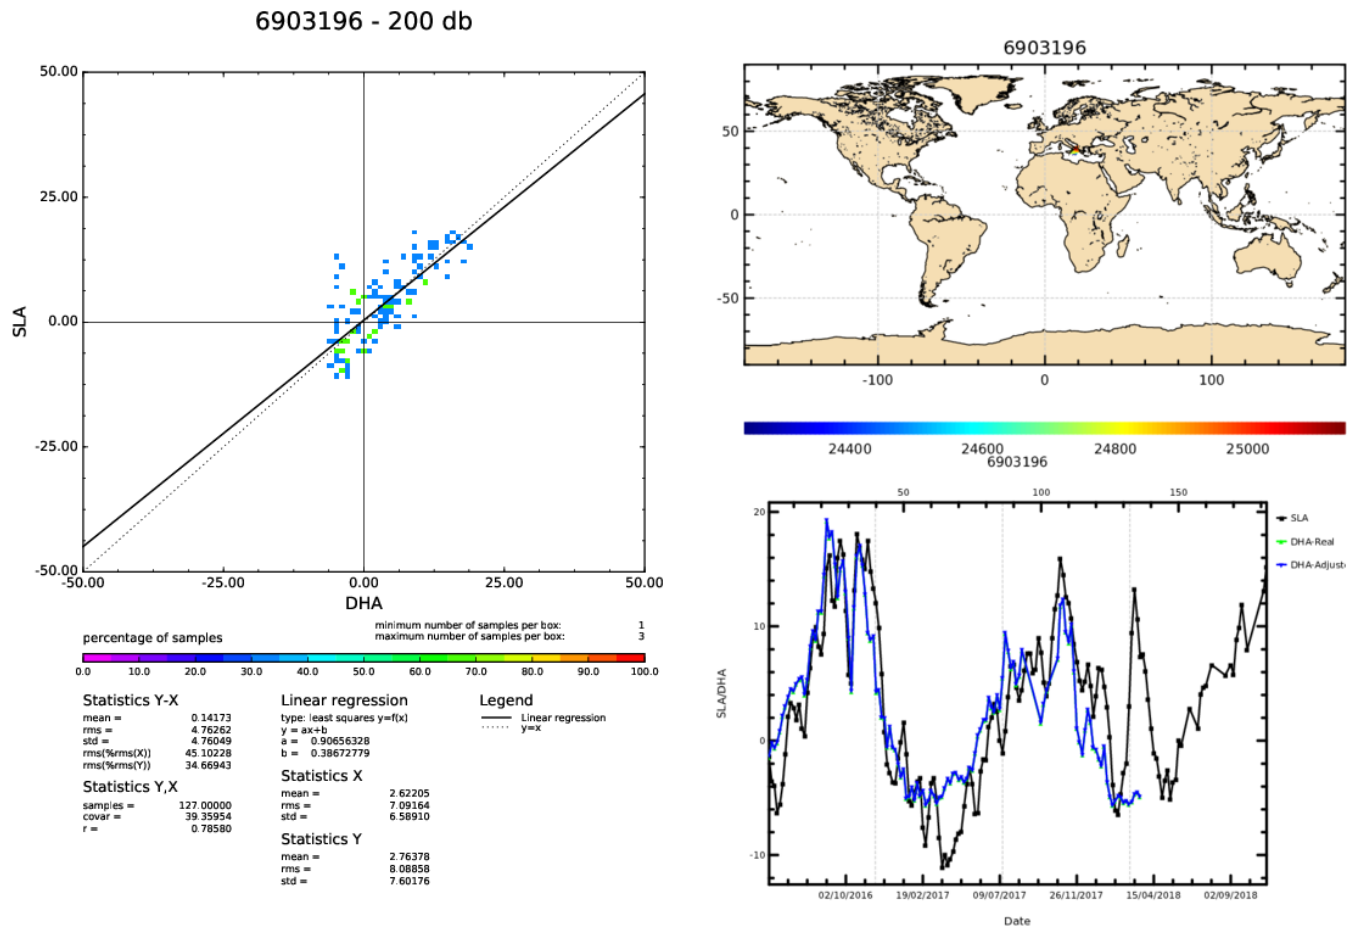


Figure 1: Float 6903196. The comparison between the sea surface height (SSH) from the satellite altimetry and dynamic height anomaly (DHA) extracted from the Argo float temperature and salinity. The figure is created by the CLS/Coriolis and distributed by Ifremer (<ftp://ftp.ifremer.fr/ifremer/argo/etc/argo-ast9-item13-AltimeterComparison/figures/>).

2.3 Time Series of Argo Float Temperature and Salinity

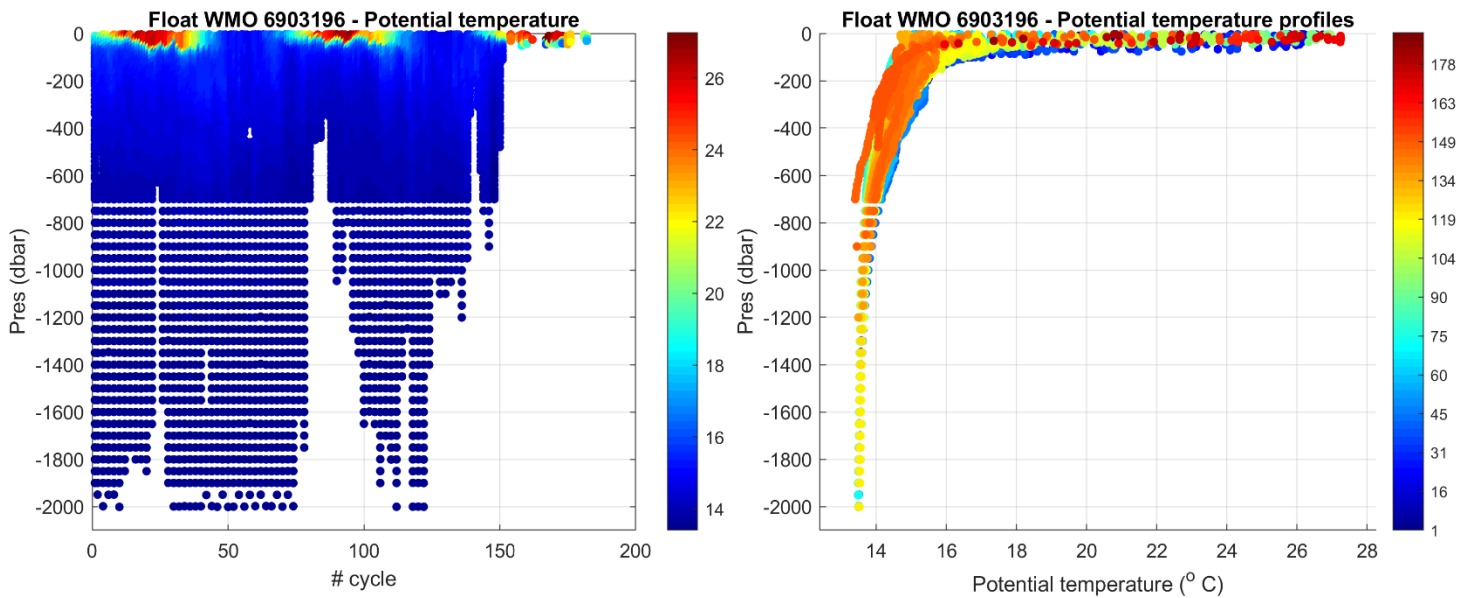


Figure 2: Float 6903196. Time series of Argo float potential temperature ($^{\circ}\text{C}$) on the left, and potential temperature profiles color-coded per cycle number on the right.

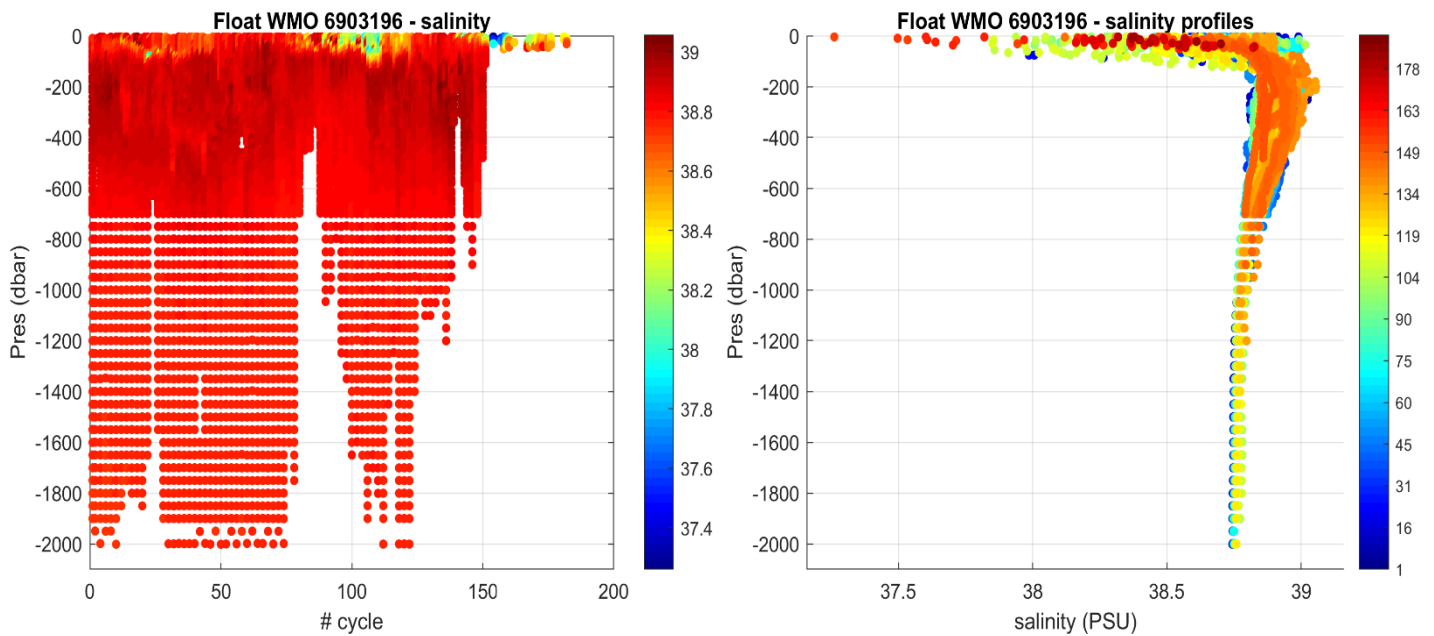


Figure 3: Float 6903196. Time series of Argo float potential salinity (PSS-78) on the left, and salinity profiles color-coded per cycle number on the right.

Before running the Owens and Wong method, referred to as OW hereafter, the theta-salinity (θ -S) diagram of the float is analyzed (Figure 3) and in particular the area where the θ -S relationship is the tightest (Figure 4). A potential salinity drift/offset is observed.

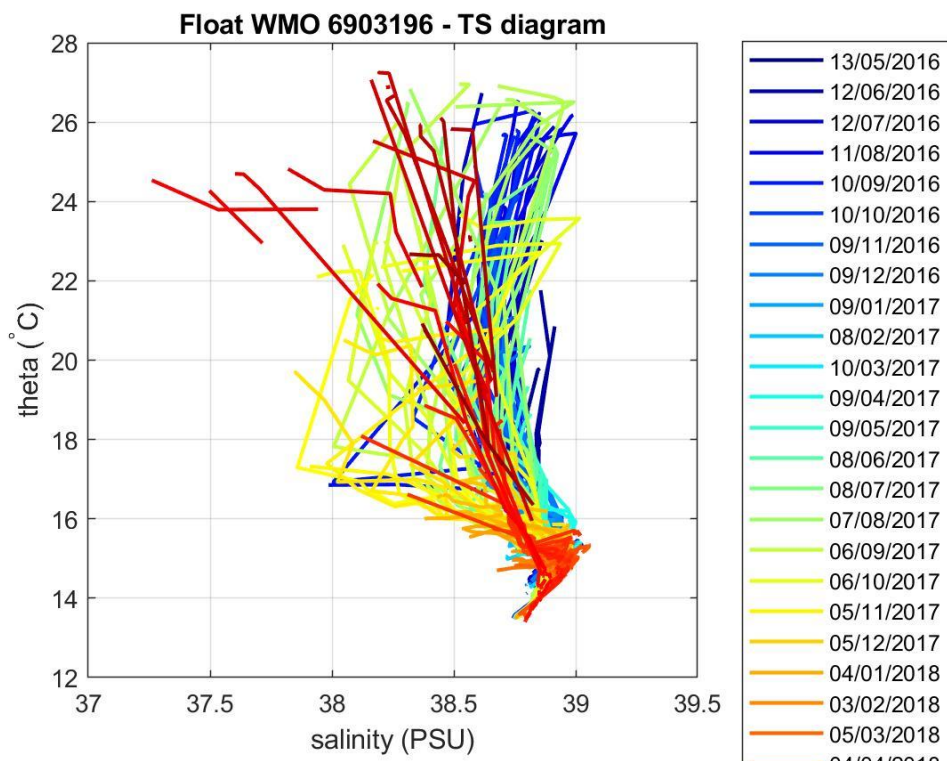


Figure 4: Float 6903196. θ -S diagram color-coded per cycle number.

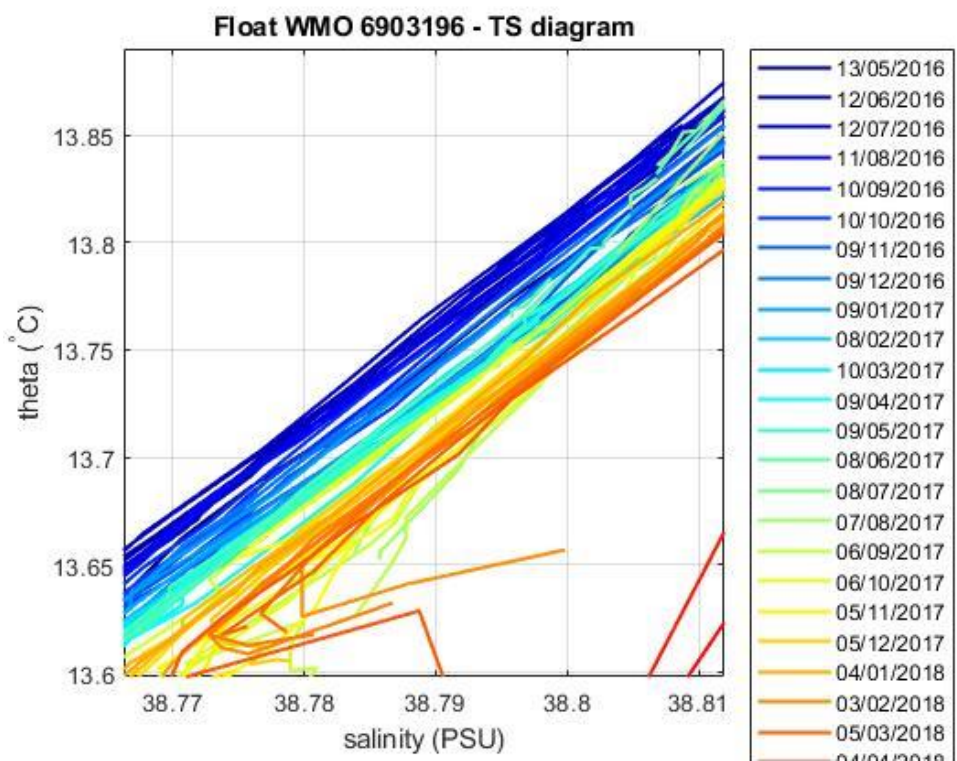


Figure 5: Float 6903196. Area of the θ -S diagram (color-coded per cycle number) where the θ -S relationship is more uniform.

2.4 Comparison Between Argo Float and Climatology

Three salinity float profiles are selected to perform a comparison (in time and space) with the historical data. In figure 5, 6 and 7 each selected profile is compared with all reference data used in this analysis. The salinity float profile is depicted in black while other colors represent the salinity reference profiles. The red color means that the historical data are more recent with respect to the float ones, while magenta states that the float data are more recent than the historical ones (the maximal difference is 9 years). A time difference between 3 and 6, 6 and 9 and larger than 9 years is depicted in green, cyan and blue, respectively.

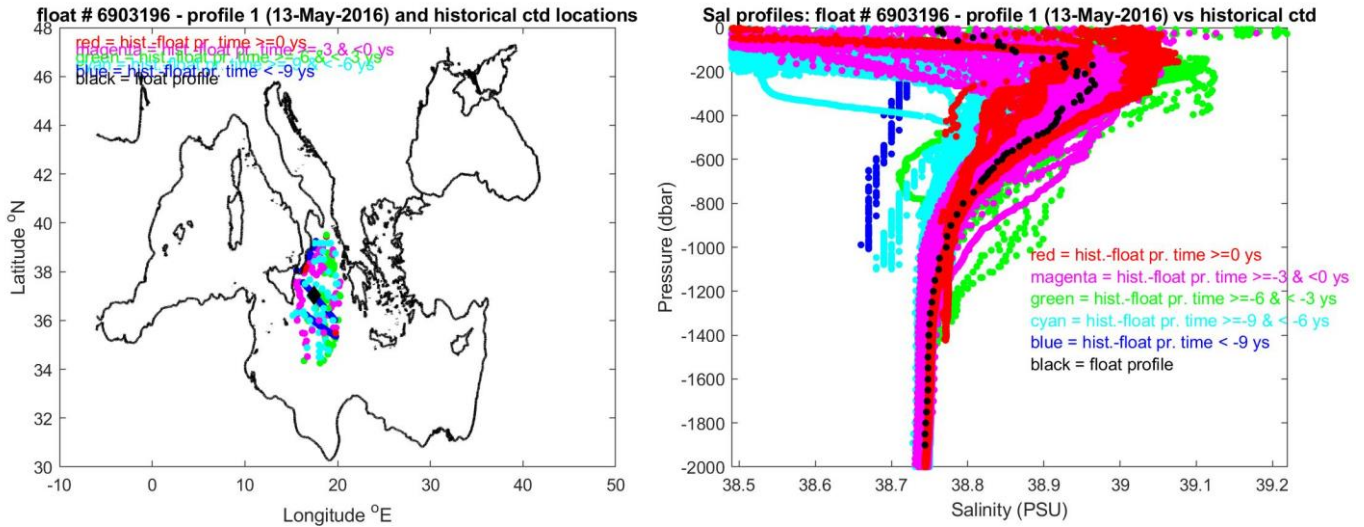


Figure 6: Float 6903196. Locations of the salinity float profile number 1 and historical CTD data (right panel) and the respective salinity profiles (left panel).

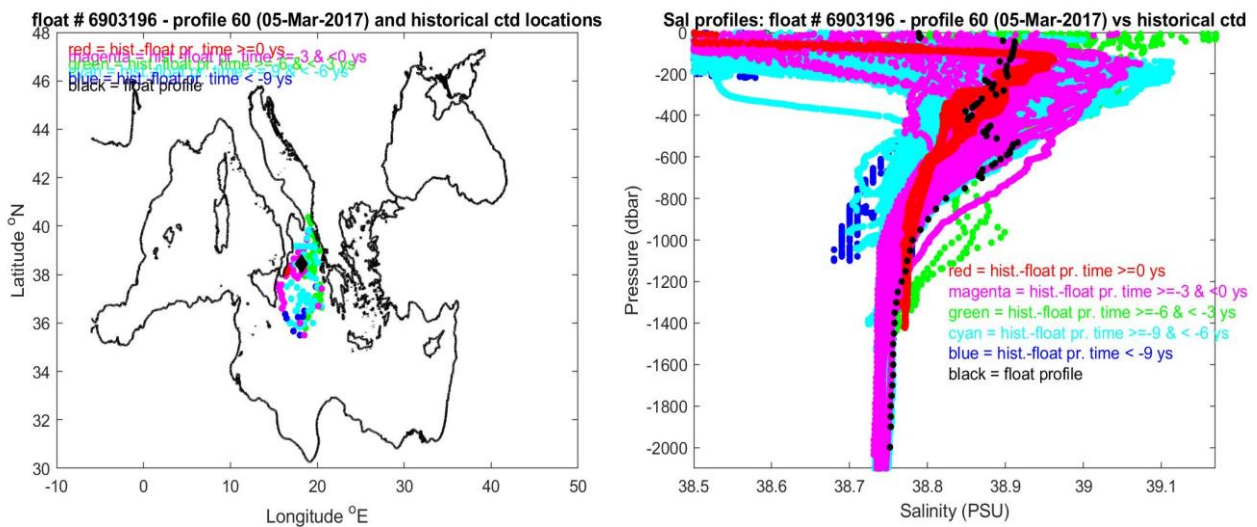


Figure 7: Float 6903196. Locations of the salinity float profile number 60 and historical CTD data (right panel) and the respective salinity profiles (left panel).


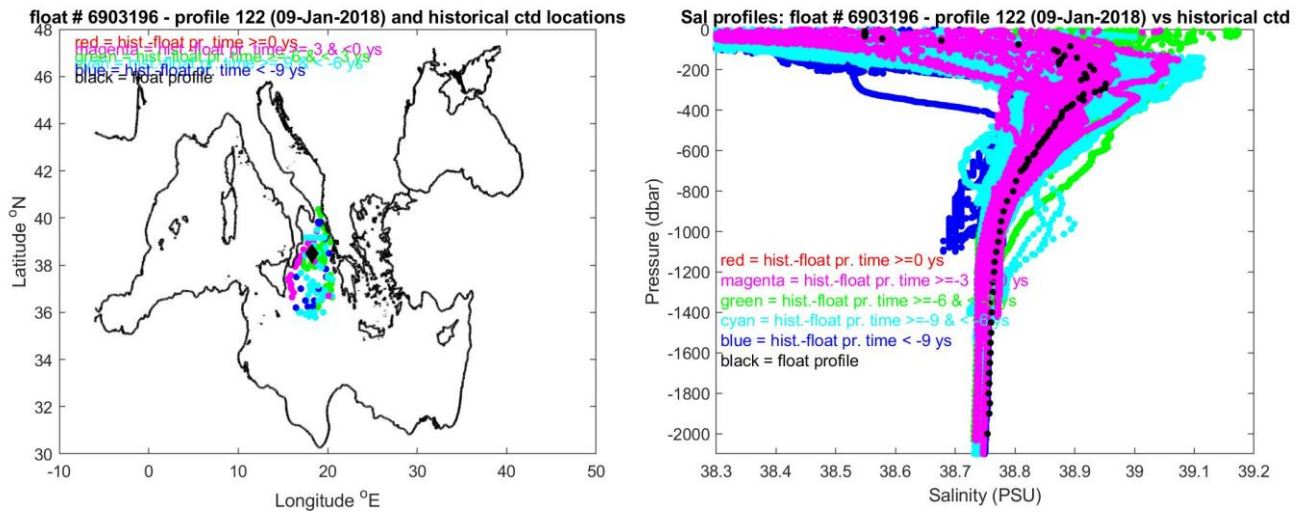



Figure 8: Float 6903196. Locations of the salinity float profile number 122 and historical CTD data (right panel) and the respective salinity profiles (left panel).

The comparison of these 3 selected salinity float profiles with the closest (in space and time) salinity reference profile is shown in Figures from 9 to 11. The agreement between the selected float salinity profiles and the historical salinity profiles is quite good in the intermediate and deeper layers, where the water column is more stable. The comparison shows a small drift/offset.


Float 6903196 - profile 1 (13-May-2016) and nearest (in space) ctd (18-Sep-2008)

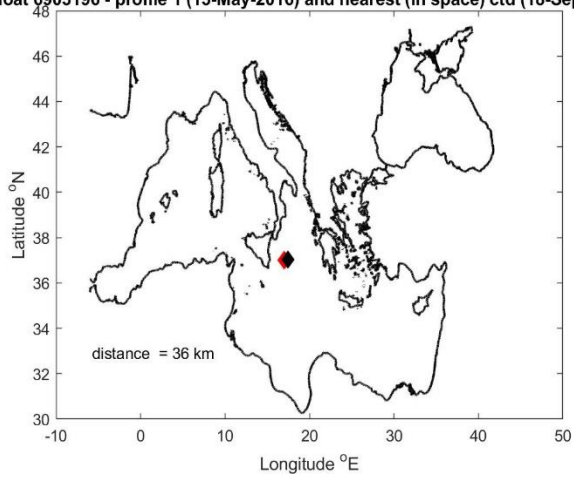

Float 6903196 - profile 1 (13-May-2016) vs nearest (in space) ctd (18-Sep-2008)

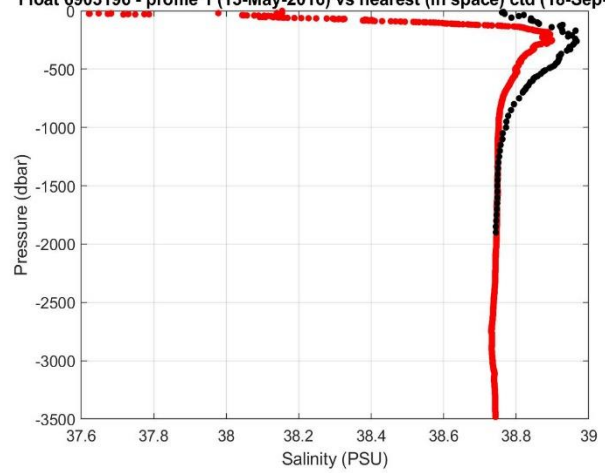

Float 6903196 - profile 1 (13-May-2016) and nearest (in time) ctd (21-Jun-2016)

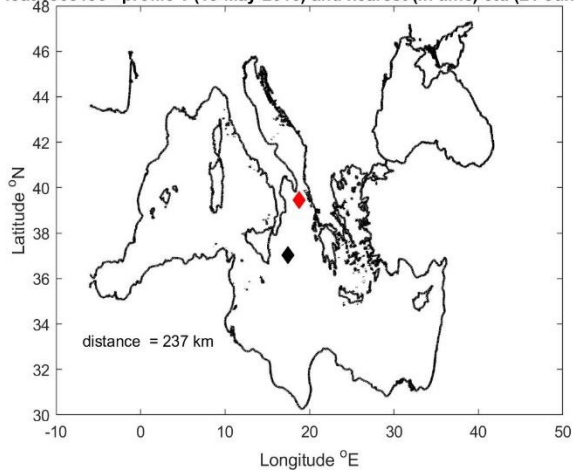

Float 6903196 - profile 1 (13-May-2016) vs nearest (in time) ctd (21-Jun-2016)

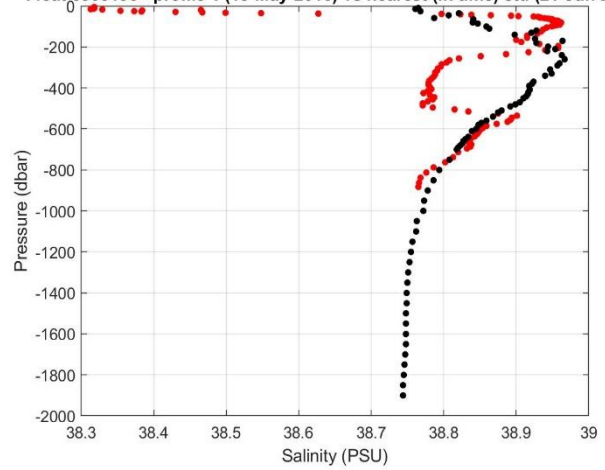


Figure 9: Float 6903196. The salinity float profile number 1 (black dots) are compared to the nearest in space (top) and in time (bottom) reference profile (red dots). The locations of the two profiles and their distance is given in the left panel.

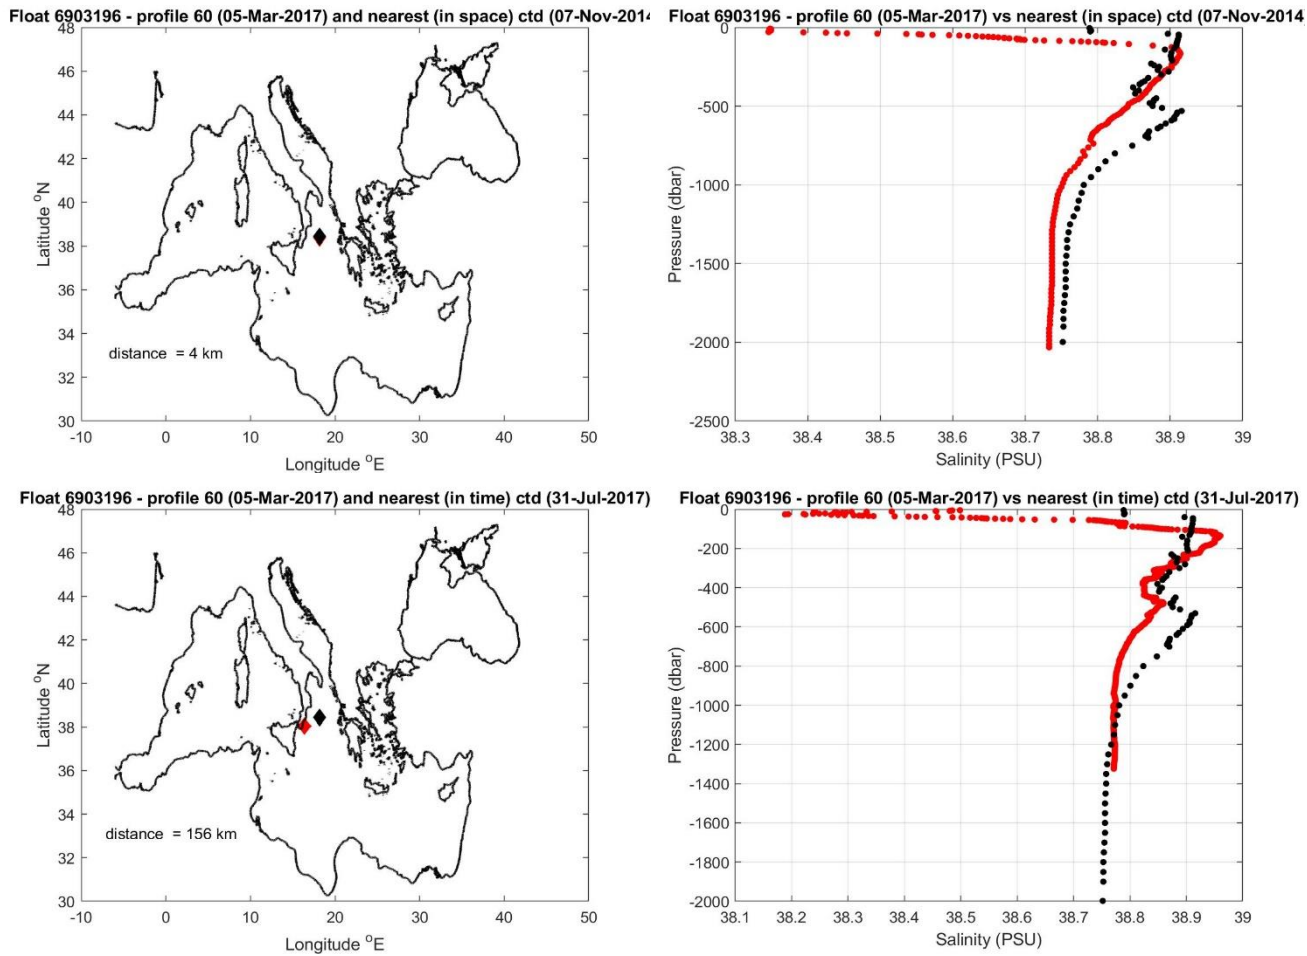


Figure 10: Float 6903196. The salinity float profile number 60 (black dots) are compared to the nearest in space (top) and in time (bottom) reference profile (red dots). The locations of the two profiles and their distance is given in the left panel.

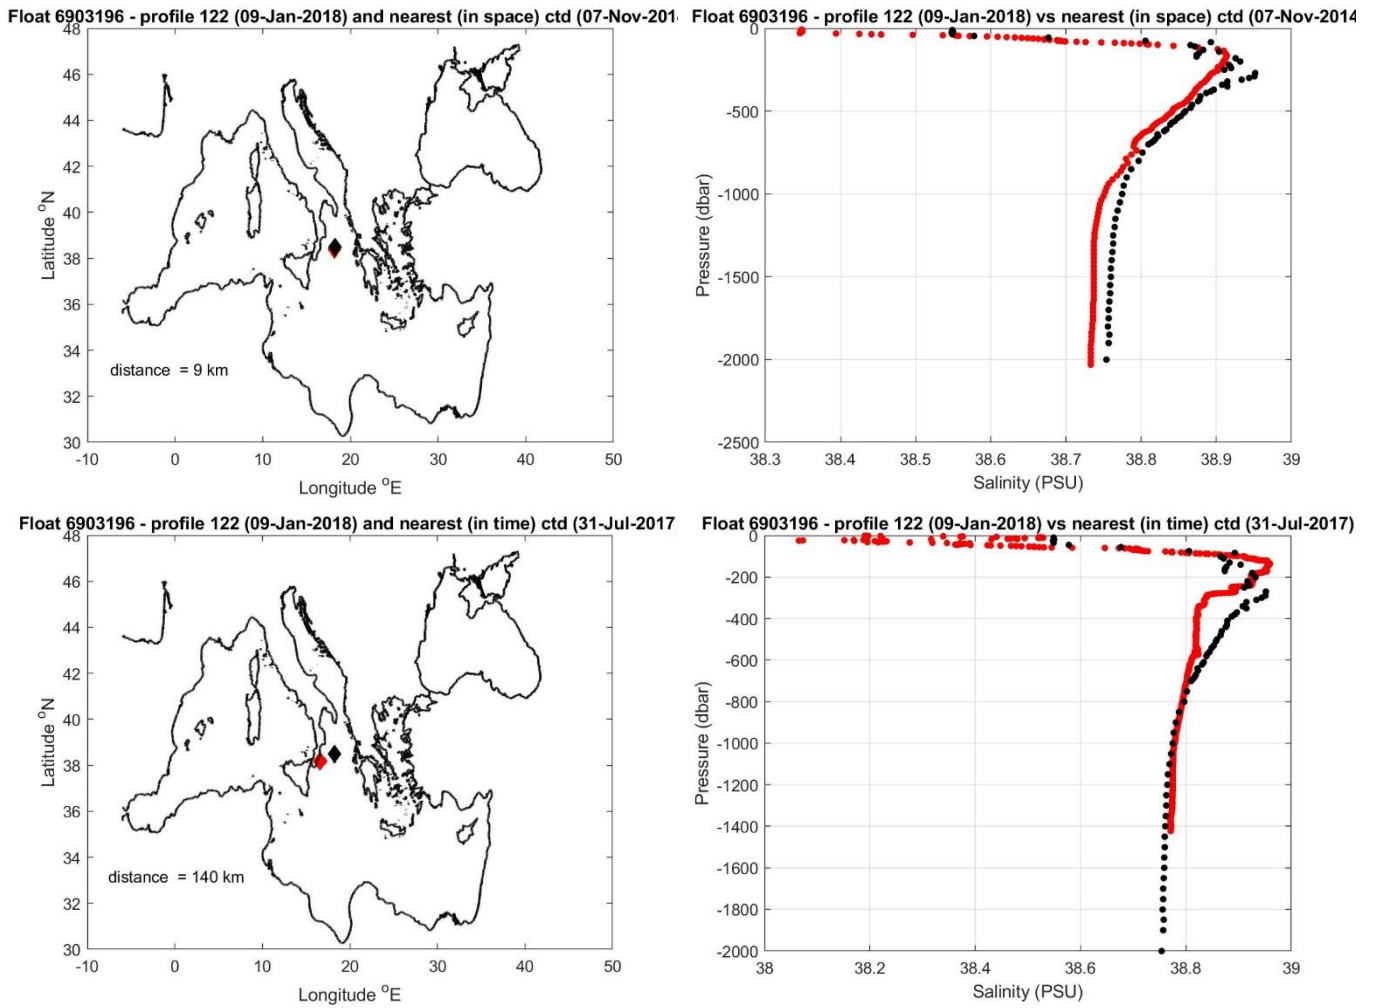


Figure 11: Float 6903196. The salinity float profile number 122 (black dots) are compared to the nearest in space (top) and in time (bottom) reference profile (red dots). The locations of the two profiles and their distance is given in the left panel.

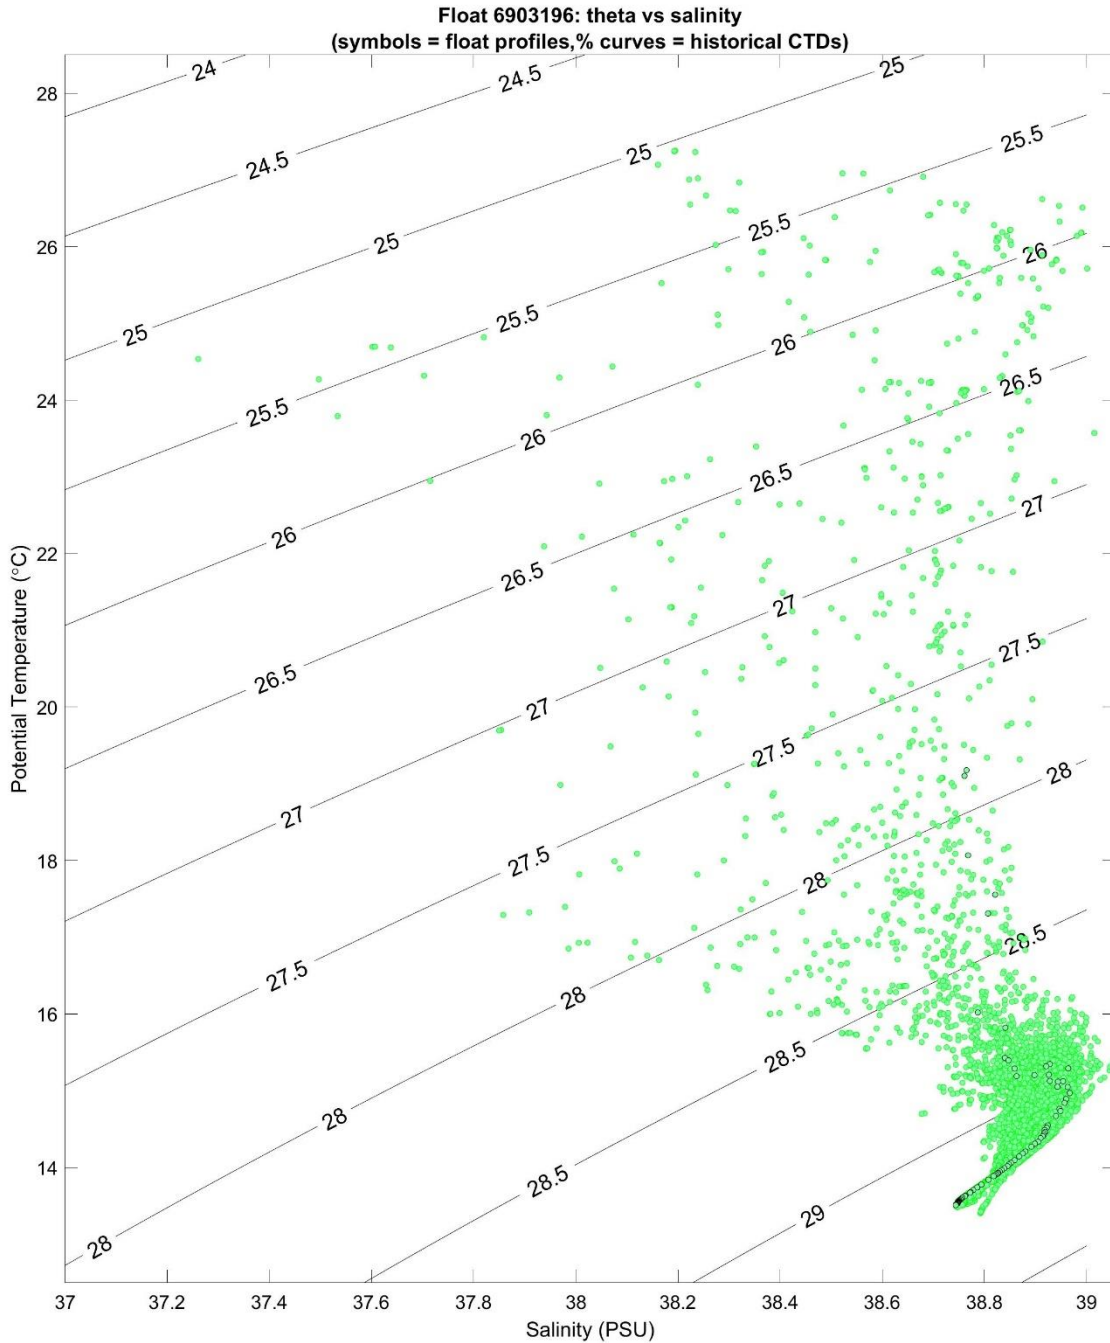


Figure 12: Float 6903196. T/S diagram plotted with and data from WMO boxes of CTD reference data +/- 10° of latitude and longitude. The black and blue cycles indicate the first and the last Argo profile, respectively. Green symbols represent other Argo profiles from this float. The thin colours lines indicate the reference data.

3 Sea surface pressure calibrations

The adjusted surface pressure is plotted in Figure 13. Surface pressure is extracted from the Argo technical file: the variable name is "PRES_SurfaceOffsetCorrectedNotResetNegative_1cBar Resolution_dbar". Although the correction is less than the accuracy of the sensor (2.4 dbar) we applied adjustment of the CTD pressure profiles.

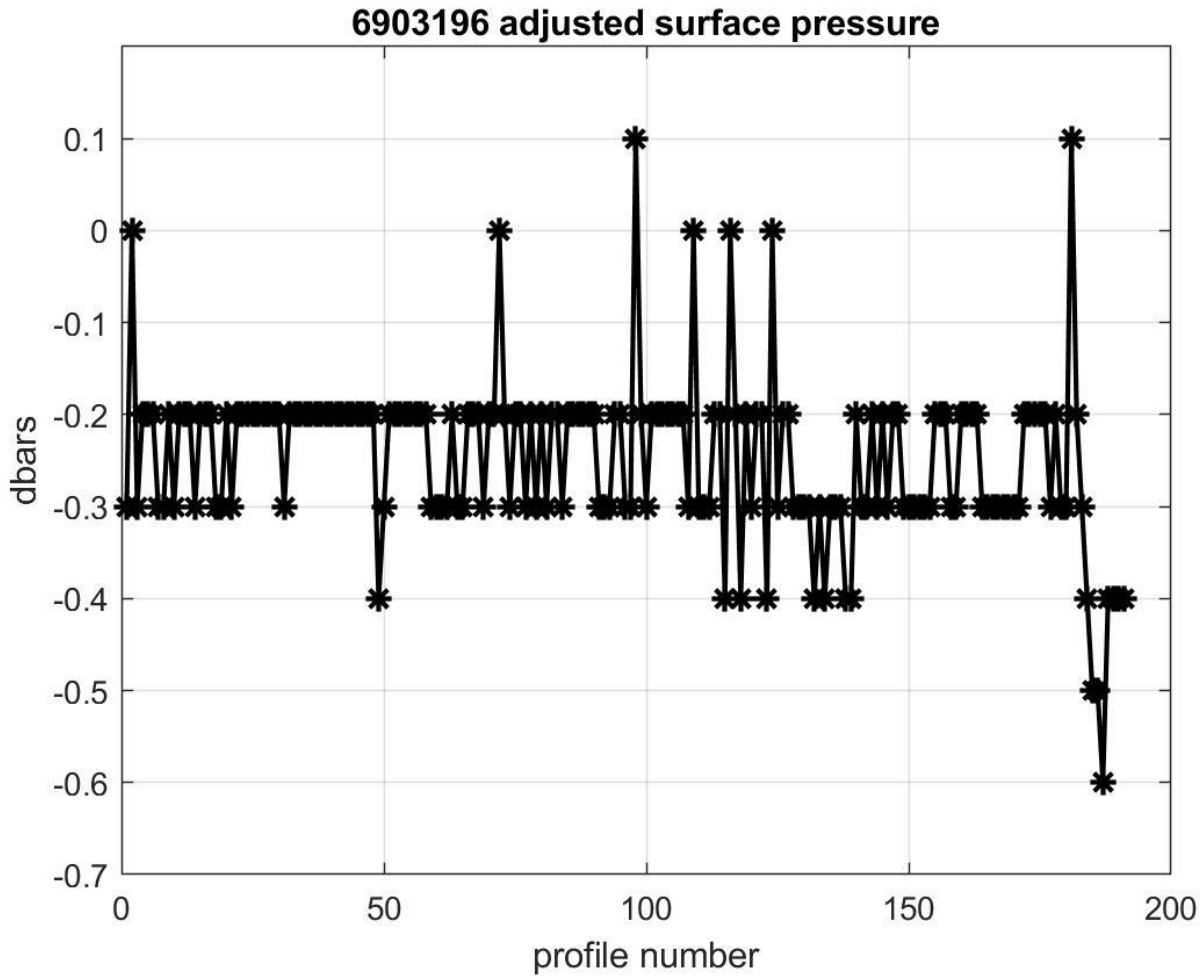


Figure 13: Float 6903196. Adjusted surface pressure values versus profile number.

4 Correction of Salinity Data

4.1 Comparison between Argo Float and CTD Climatology

4.1.1 Configurations

Parameters	Value
CONFIG_MAX_CASTS	300
MAP_USE_PV	1
MAP_USE_SAF	0
MAPSCALE_LONGITUDE_LARGE	4
MAPSCALE_LONGITUDE_SMALL	1.33
MAPSCALE_LATITUDE_LARGE	4
MAPSCALE_LATITUDE_SMALL	1.33
MAPSCALE_PHI_LARGE	0.5
MAPSCALE_PHI_SMALL	0.1
MAPSCALE_AGE	10
MAP_P_EXCLUDE	700
MAP_P_DELTA	250
USE_THETA_LT	13.7

4.1.1 Results

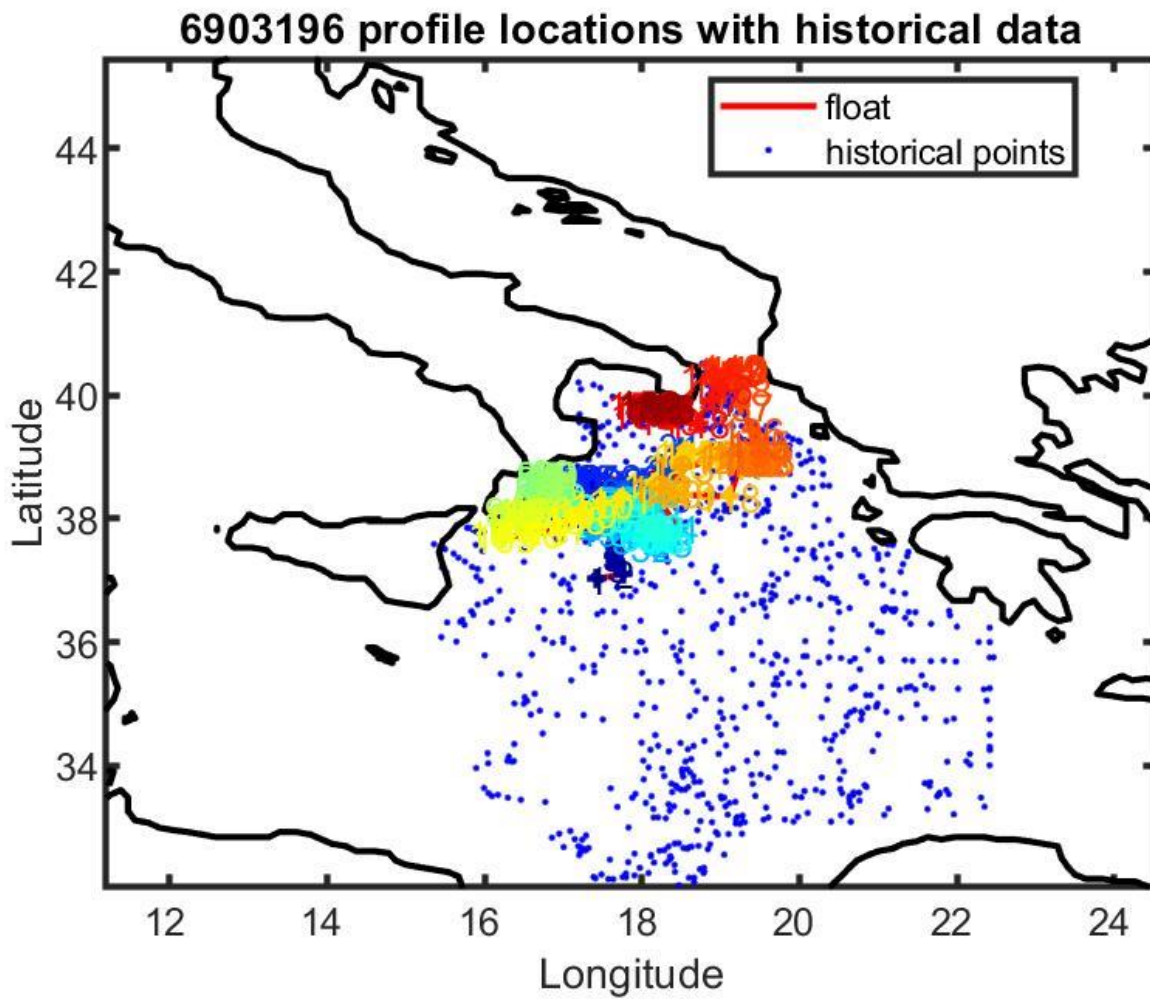


Figure 14: Float 6903196. Location of the float profiles (red line with colored numbers) and the reference data selected for mapping (blue dots).

6903196 uncalibrated float data (-) and mapped salinity (o) with objective errors

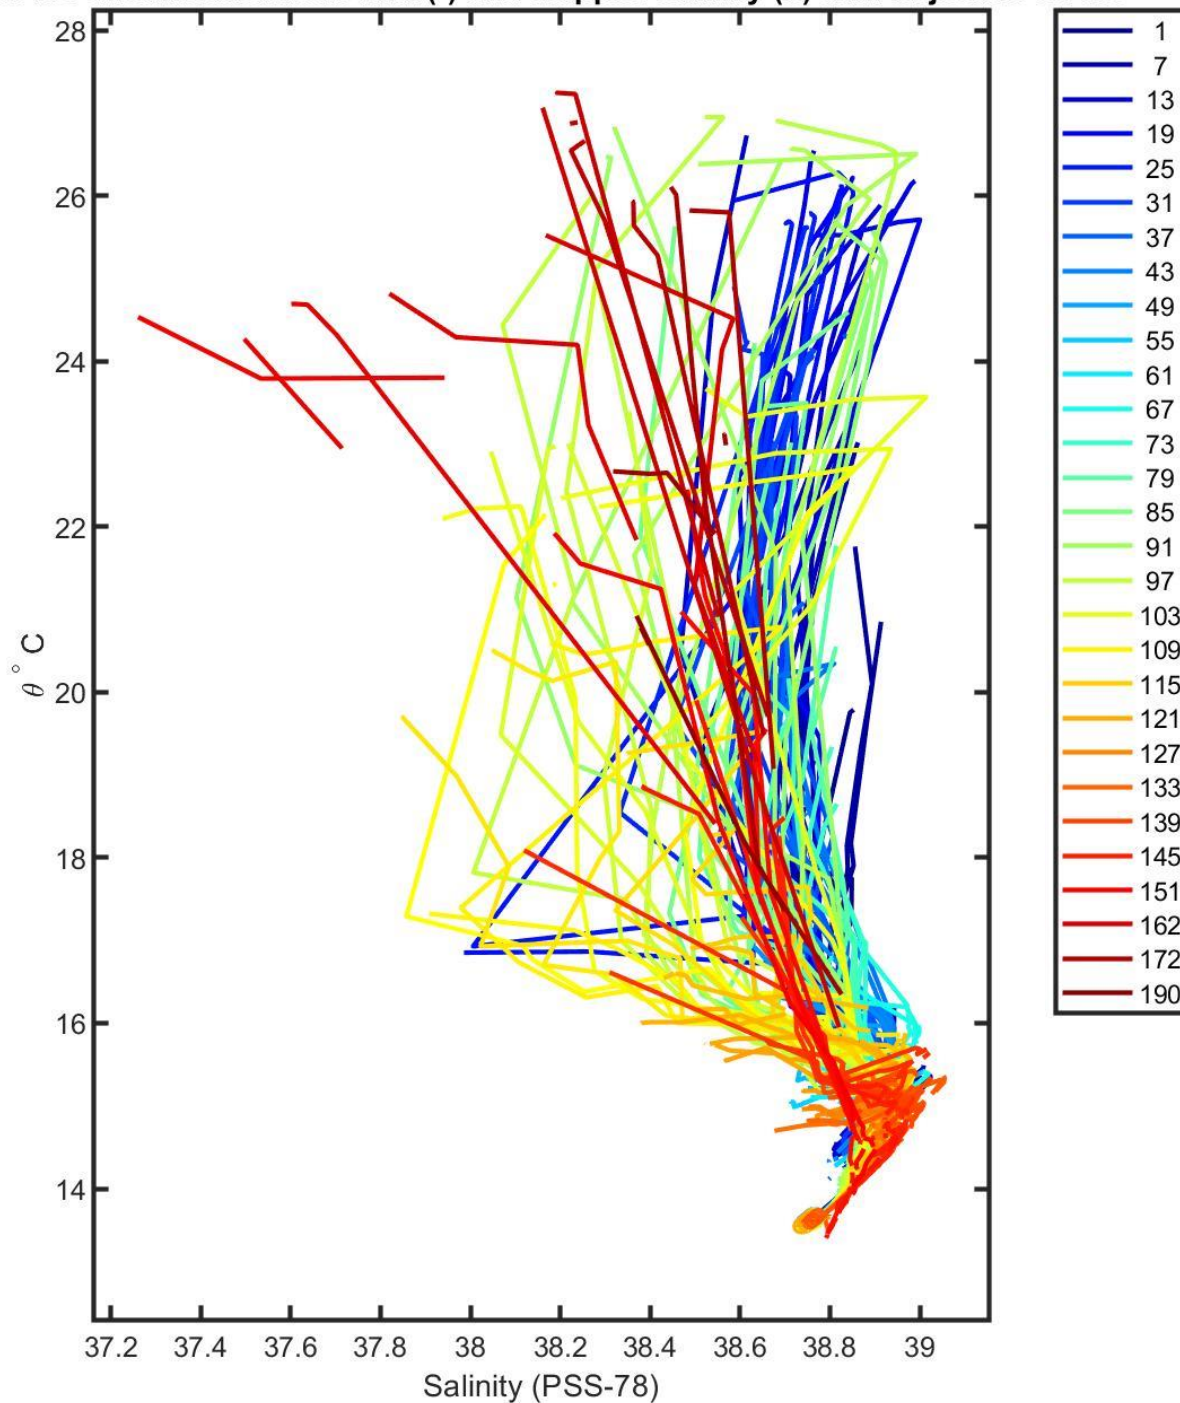


Figure 15: Float 6903196. Plot the original float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.

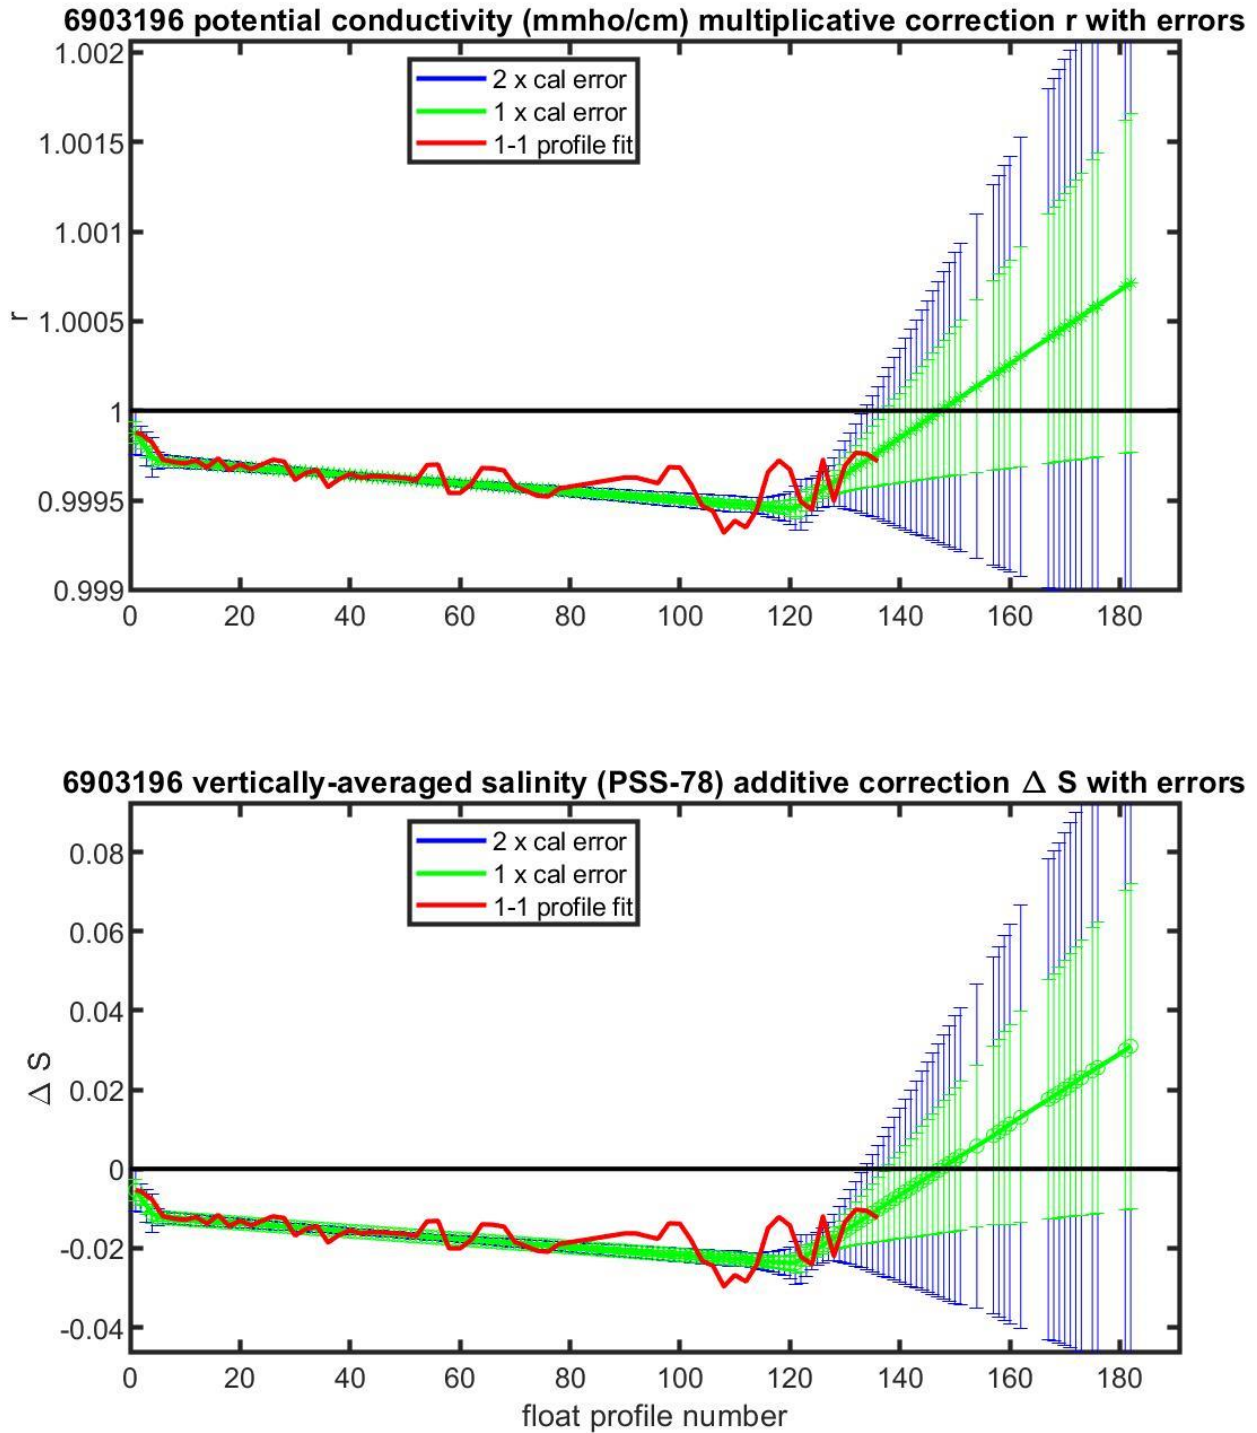


Figure 16: Float 6903196. Evolution of the suggested adjustment with time. The top panel plots the potential conductivity multiplicative adjustment. The bottom panel plots the equivalent salinity additive adjustment. The red line denotes one-to-one profile fit that uses the vertically weighted mean of each profile. The red line can be used to check for anomalous profiles relative to the optimal fit.

6903196 calibrated float data (-) and mapped salinity (o) with objective errors

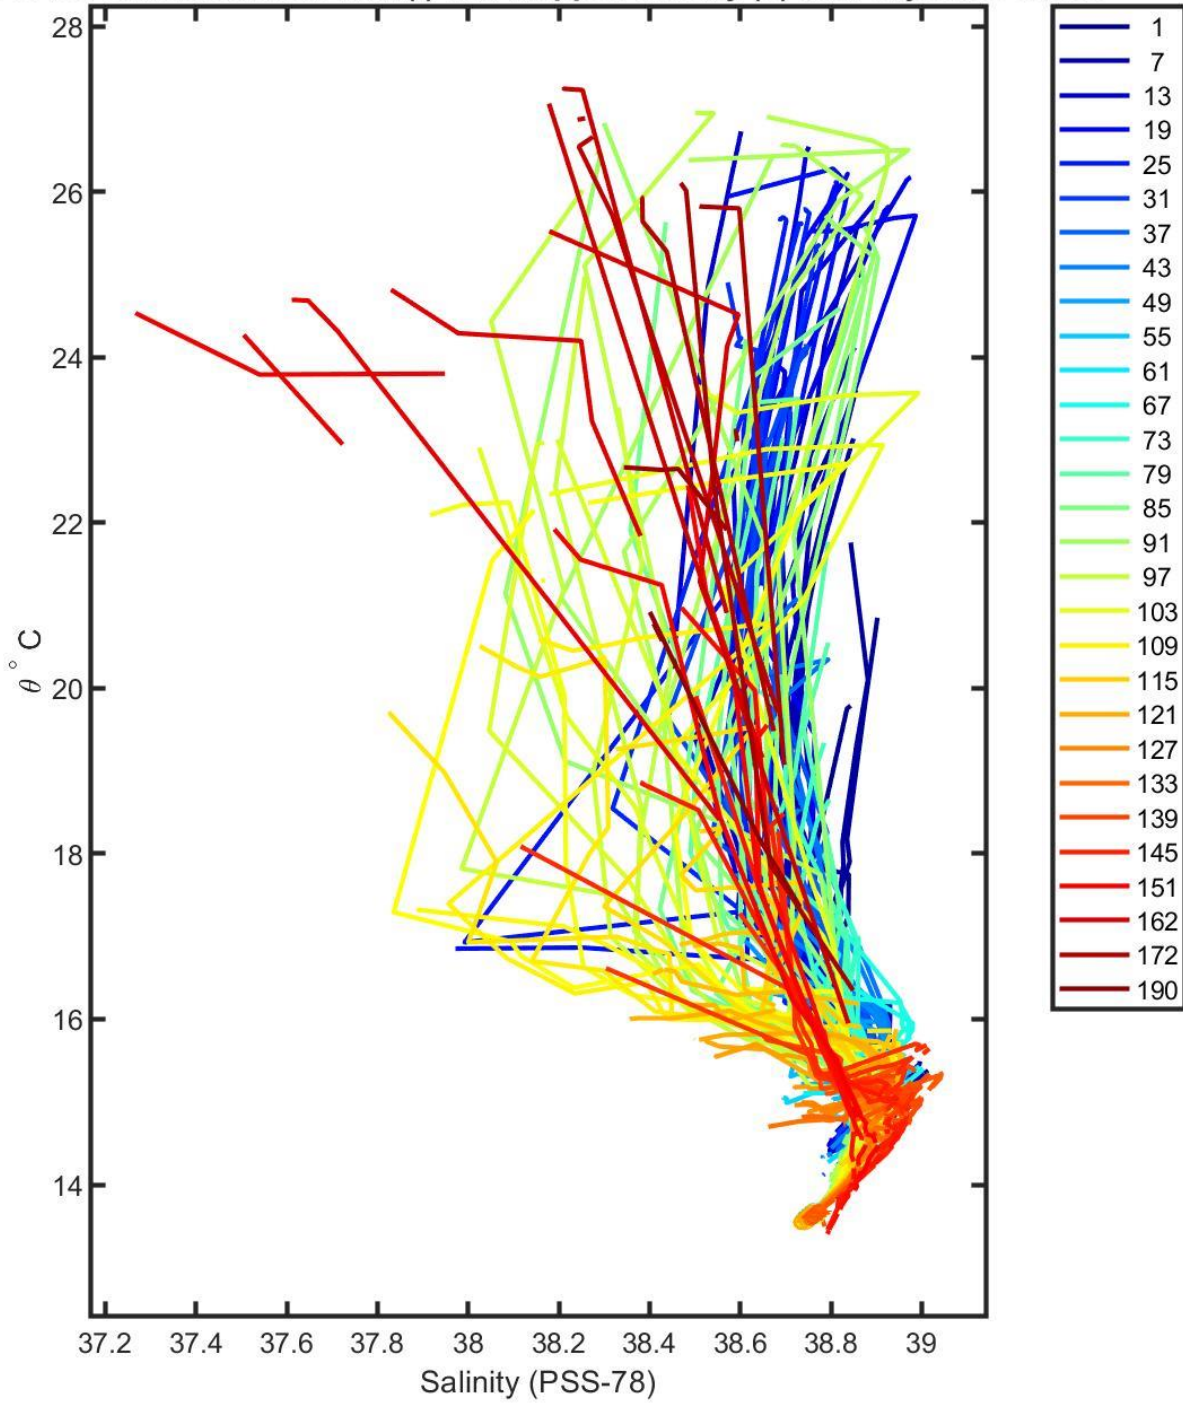


Figure 17: Float 6903196. The plot of calibrated float salinity and the objectively estimated reference salinity at the 10 float theta levels that are used in calibration.

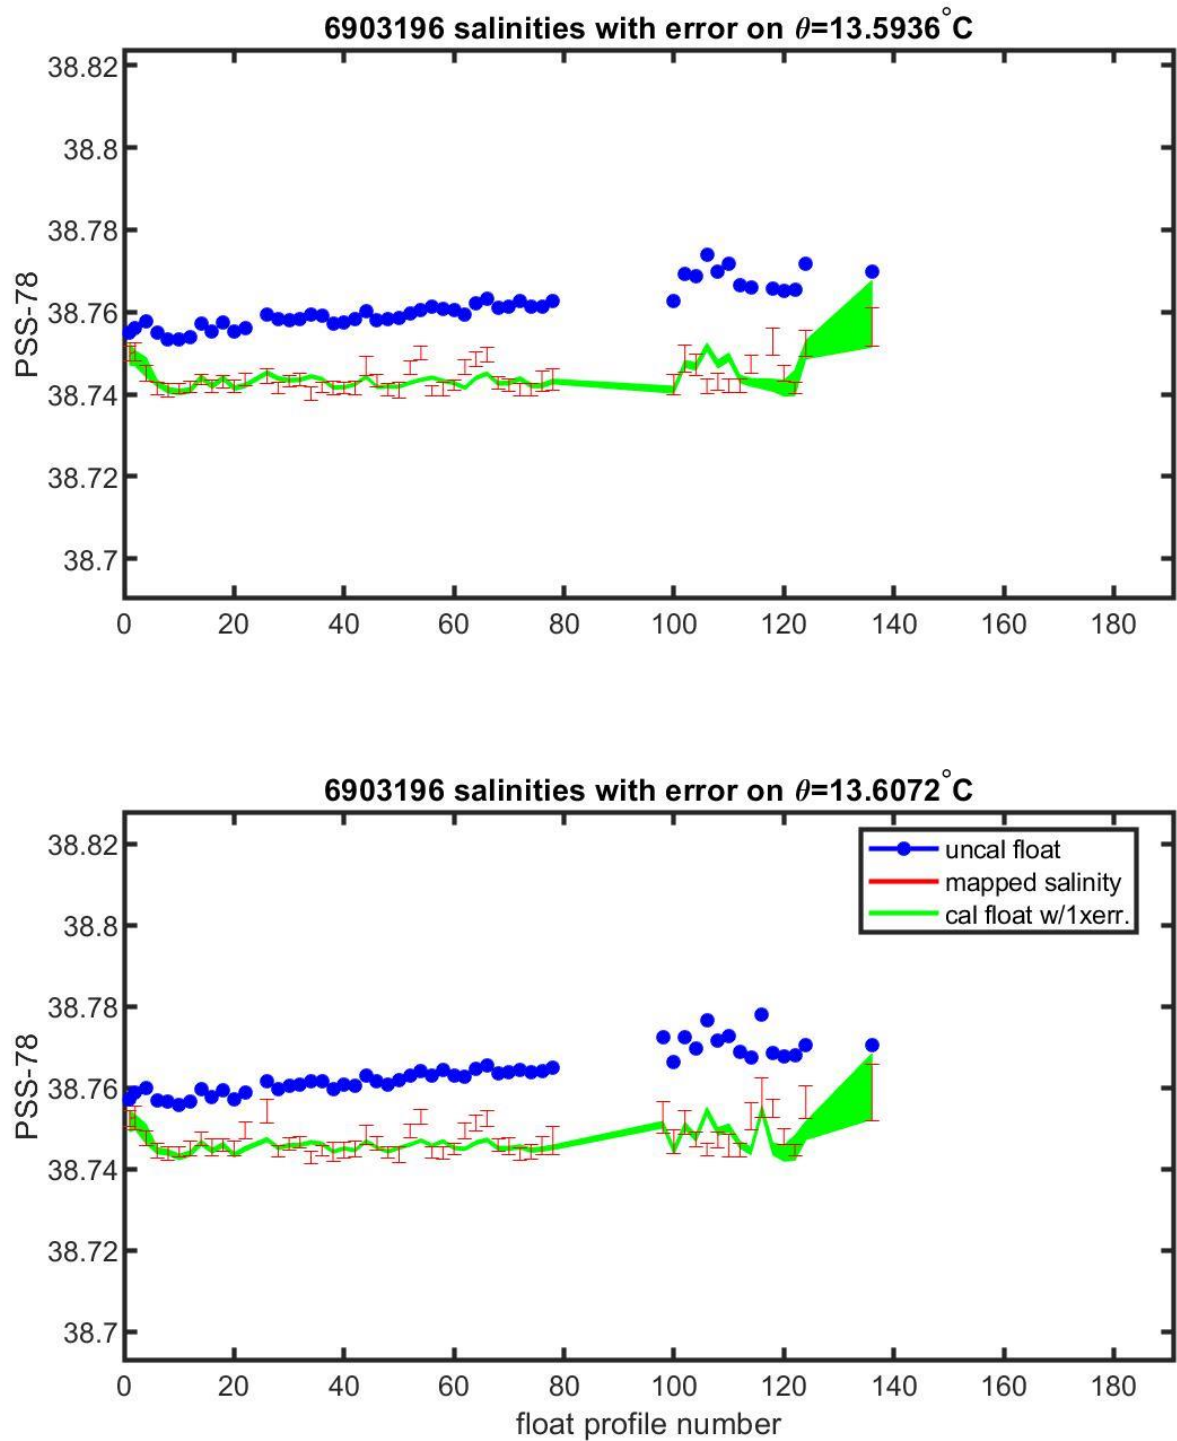


Figure 18: Float 6903196. Plots of the evolution of salinity with time along with selected theta levels with minimum salinity variance.

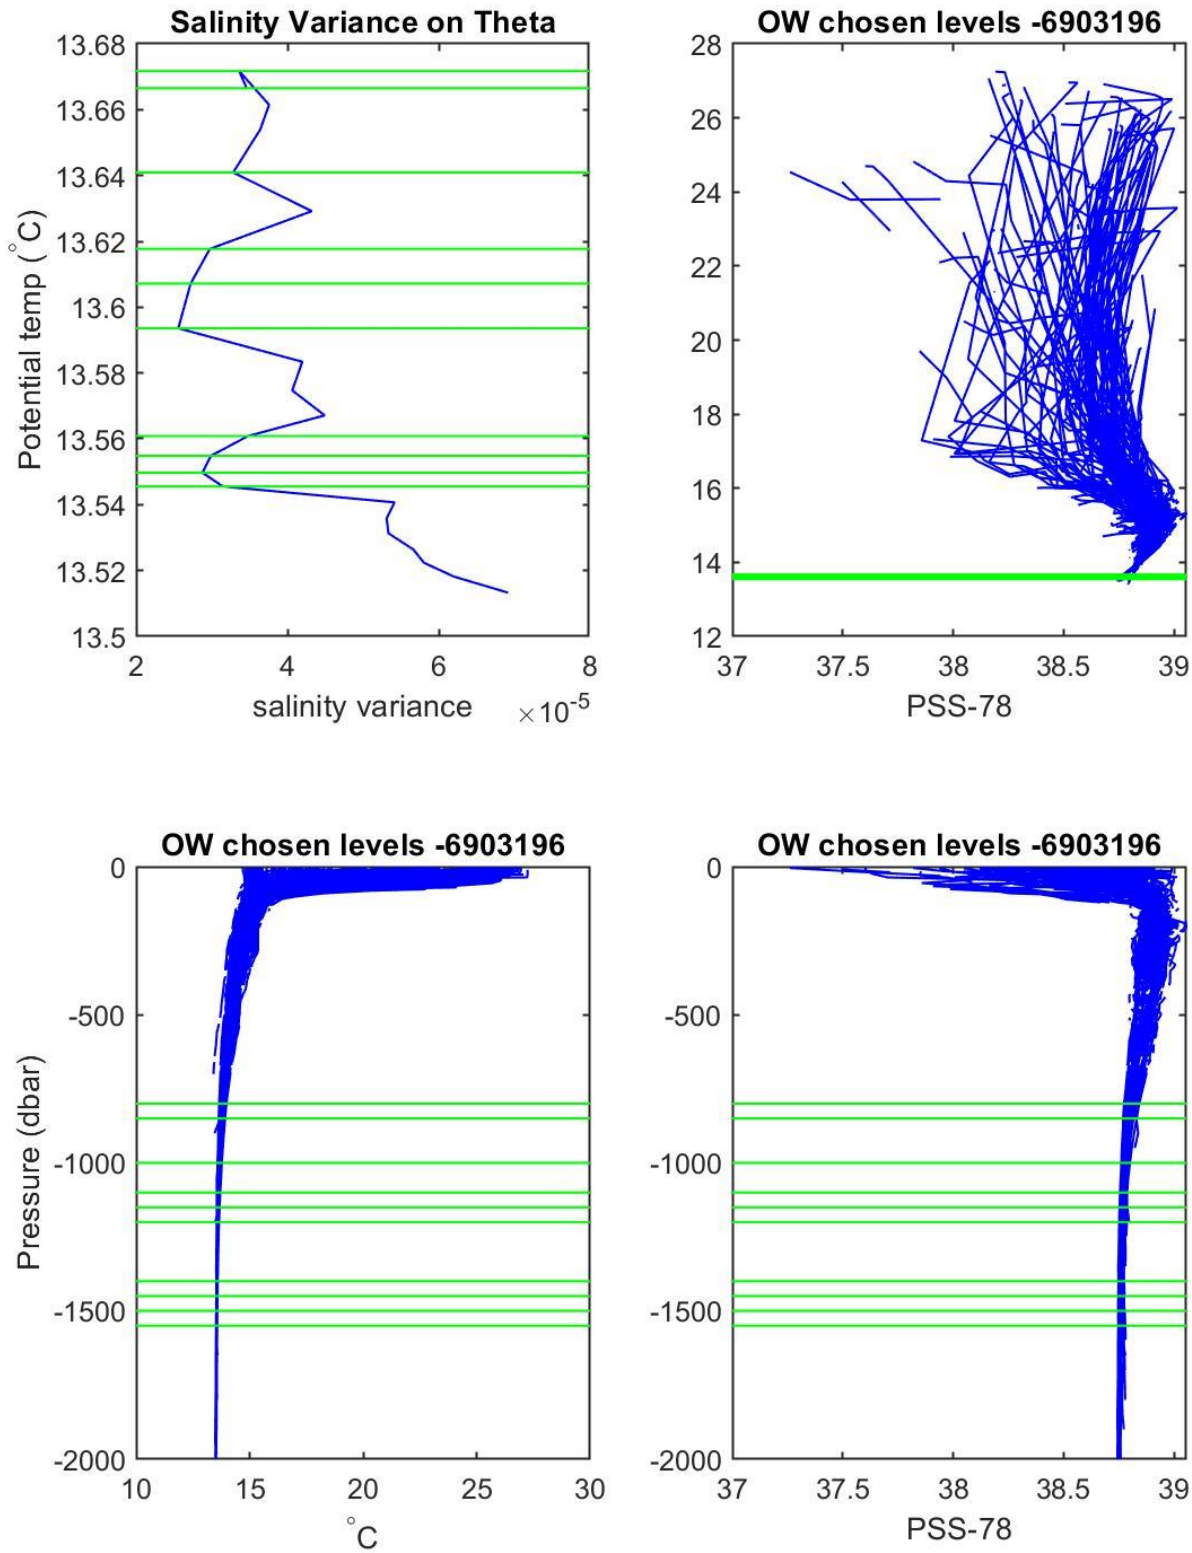


Figure 19: Float 6903196. Plots include the theta levels chosen for calibration: Top left: Salinity variance at theta levels. Top right: T/S diagram of all profiles of Argo float. Bottom left: potential temperature plotted against pressure. Bottom right: salinity plotted against pressure.

The analysis of the θ -S diagram of profile segments deeper than 700 dbar (Figure 19) shows that the OW method was run where the θ -S relationship is the tightest.

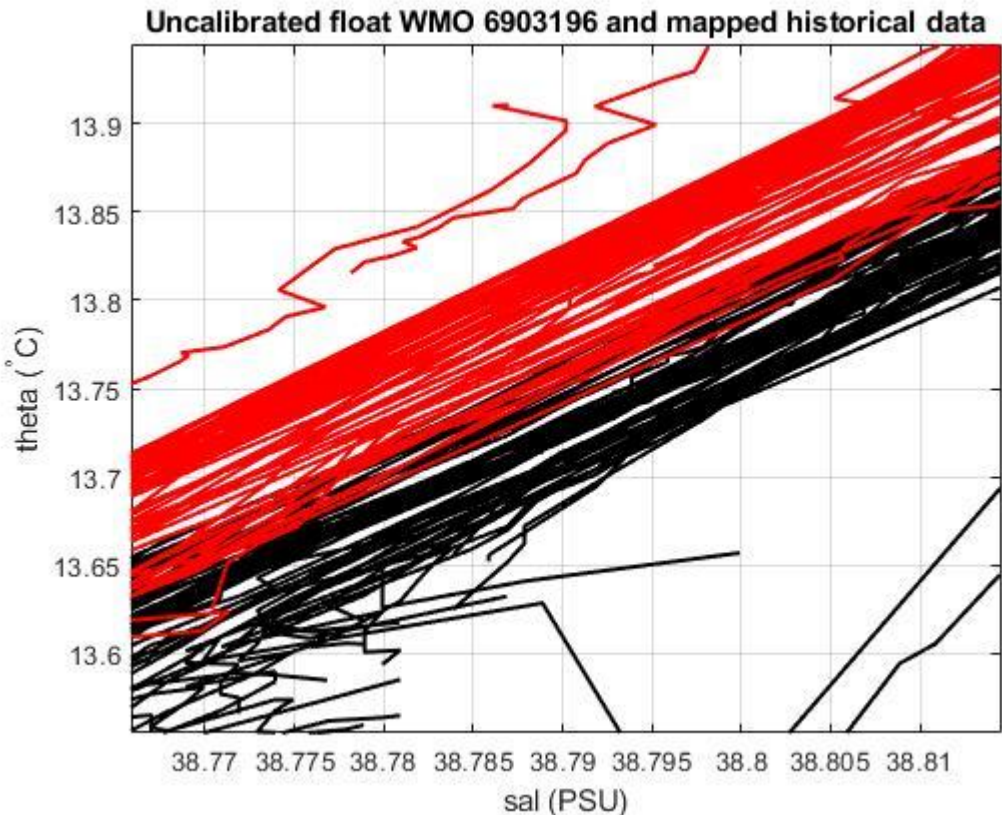


Figure 20: Float 6903196. Uncalibrated float salinity profile (black lines) and mapped historical data (red lines) in the most uniform part of the θ -S curve.

5 Comparison between Argo float under study and other Argo float in the same area

Three floats (Figure 20) are selected to perform a comparison with the float under study to obtain additional qualitative analysis.

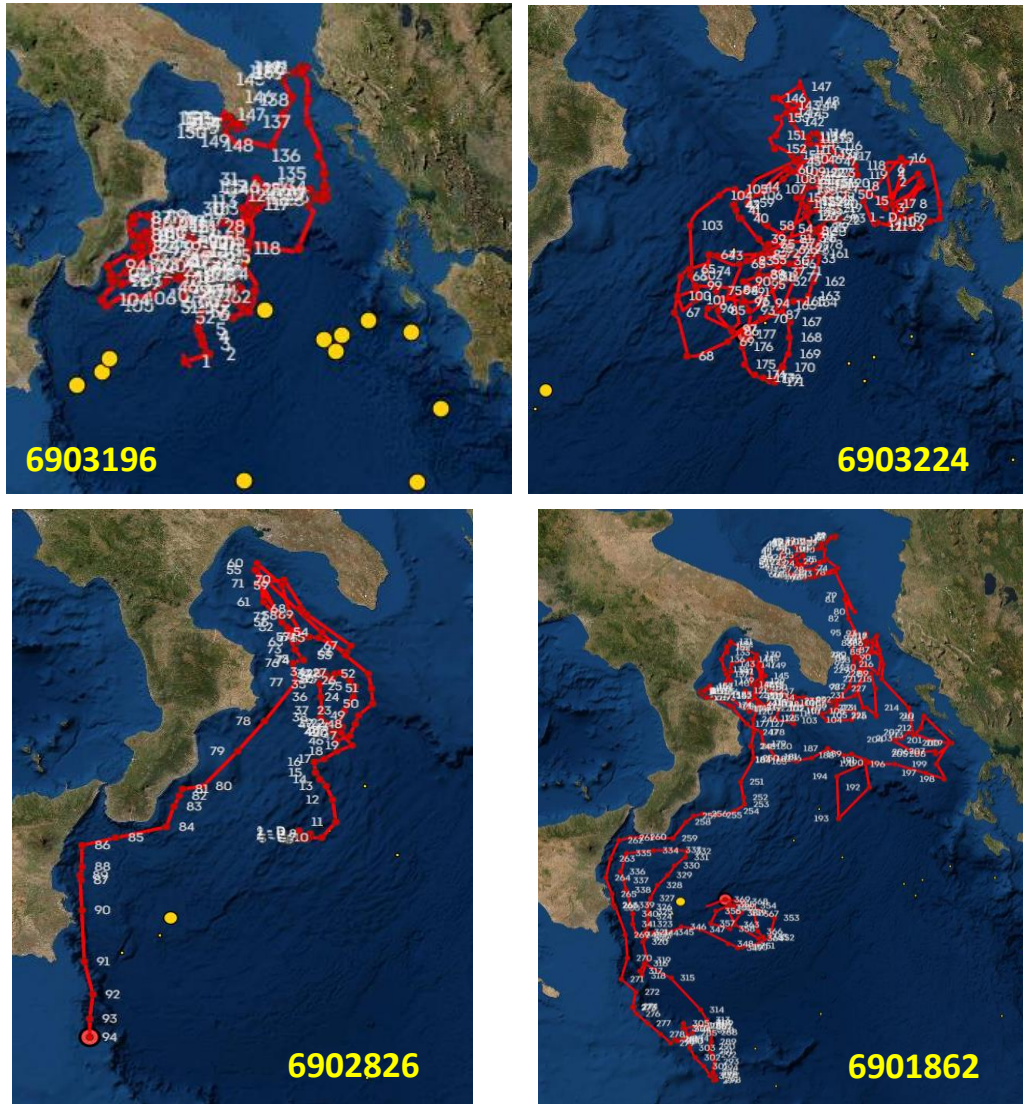


Figure 21: Float 6903196. Trajectory of the floats used for the comparison.

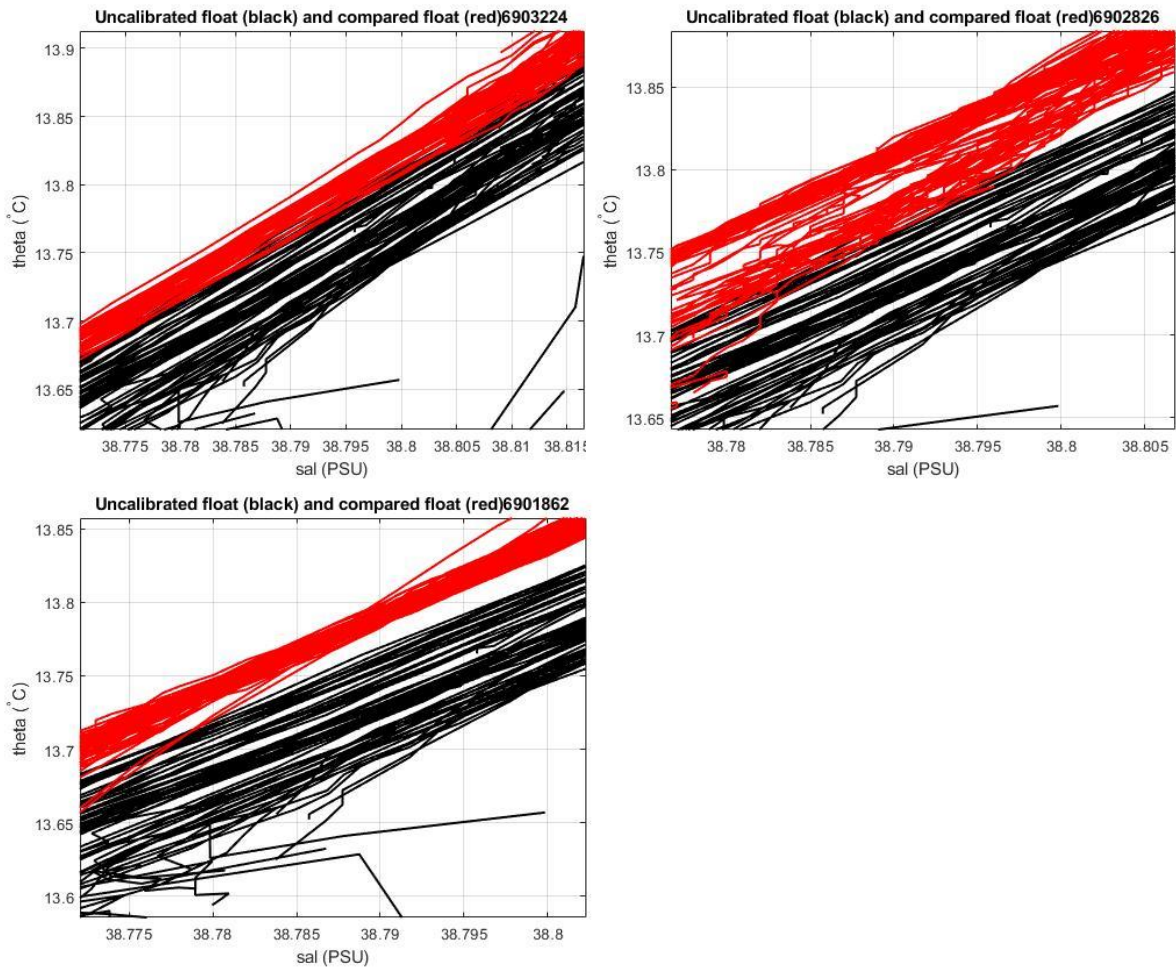


Figure 22: Float 6903196. Comparison between float 6903196(black line) and three floats (red line), in the most uniform part of the θ -S curve.

6 Summary

Float was deployed in the Ionian sub-basin, in the Mediterranean Sea. The most favorable water masses, which are useful for comparison with climatology is relatively stable intermediate and deep waters from around 700 m. The initial comparison between Argo float and reference data shows a small salinity offset/drift. This float was not DMQC-ed before.

The OWC analysis showed a salinity offset/drift. Figure 16 reveals that the least square fit have uncertainties. Figure 18 shows that there is an offset/drift on selected θ -levels. The correction proposed by OW is a little bit over the Argo requested accuracy (0.01). A comparison with another float is made in order to have an additional qualitative analysis. The profiles used has QC 1 after DMQC analysis. After several analyses, the last decision is that the salinity data of float WMO 6903196 needs a delayed mode correction for profiles from 1 to 120. QC 1 is applied. Profiles from 121 to 190 could not be properly corrected in delayed mode. QC 4 is applied.

PSAL_ADJUSTED=PSAL+ ΔS from cycle 1 to 120

PSAL_ADJUSTED=PSAL from cycle 121 to 190

The quality flags applied are the following:

PSAL_ADJUSTED_QC='1' from cycle 1 to 120

PSAL_ADJUSTED_QC='4' from cycle 121 to 190

The delayed-mode files (Dfiles) have been created accordingly and sent to the Coriolis GDAC.

7 References

Cabanes, C., Thierry, V., & Lagadec, C. (2016). Improvement of bias detection in Argo float conductivity sensors and its application in the North Atlantic. *Deep-Sea Research Part I: Oceanographic Research Papers*, 114, 128–136. <https://doi.org/10.1016/j.dsr.2016.05.007>

Annie Wong, Robert Keeley, Thierry Carval and the Argo Data Management Team (2020). Argo Quality Control Manual for CTD and Trajectory Data. <http://dx.doi.org/10.13155/33951>